



1. Mechanical Dimensions:

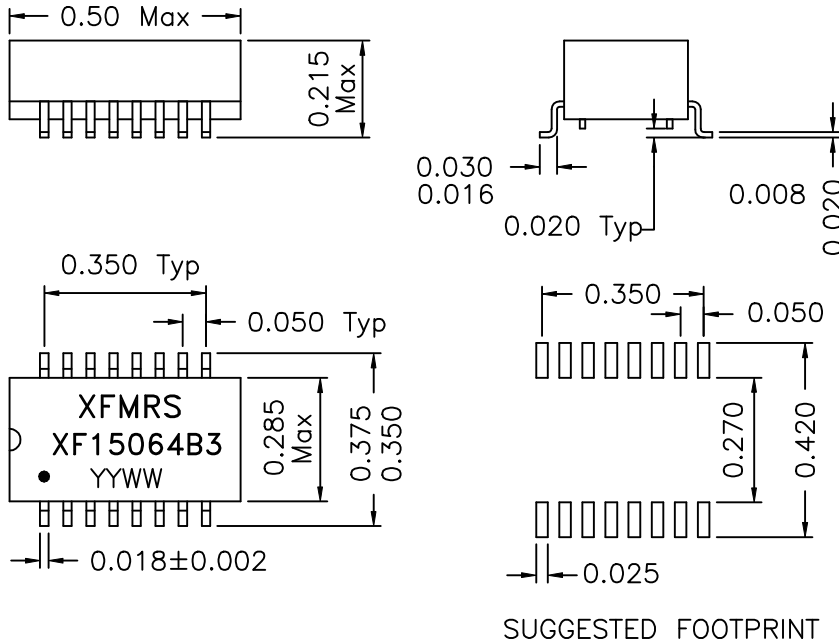

2. Schematics:

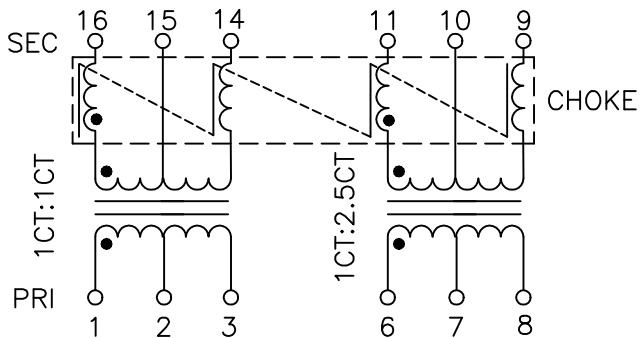

3. Electrical Specifications: @25°C

PRI/SEC Isolation: 1500Vrms

Turns Ratio: (1-2-3):(16-15-14) 1CT:1CT±3%

Turns Ratio: (6-7-8):(11-10-9) 1CT:2.5CT±3%

PRI OCL: 150uH Min @10KHz 100mV

LL 1-3: 0.50uH Max @1MHz Min 16-14 Shorted

LL 6-8: 0.50uH Max @1MHz Min 11-9 Shorted

PRI DCR: 1.0 ohms Max

SEC DCR: 1.1 ohms Max

Cw/w 1-16: 17pF Max @100KHz

Cw/w 6-11: 20pF Max @100KHz

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible

DOC. REV A/1

XFMR5 Inc	Title: 10 BASE T Magnetics		
	UNLESS OTHERWISE SPECIFIED	P/N: XF15064B3	REV. A
	TOLERANCES:	DWN.	李清儿
	.xxx ±0.010	CHK.	孙小松
Dimensions in INCH	APP.	Phil C	May-13-99
SCALE 2.5:1 SHT 1 OF 1			May-13-99