


PLL Oscillator

P/N: PLO 1210

Frequency(MHz)	1210
Level(dBm)	+10
Phase Noise(dBc)	-100/Hz @1KHz
Spurious(dBc)	-75
Frequency Stability(KHz)	±1 @ (-10°C- +70°C)
Power Supply(V)	+12
Connector	SMA-Female
Operating Temperature(°C)	-10- +70

Outline Drawing (Size: mm)

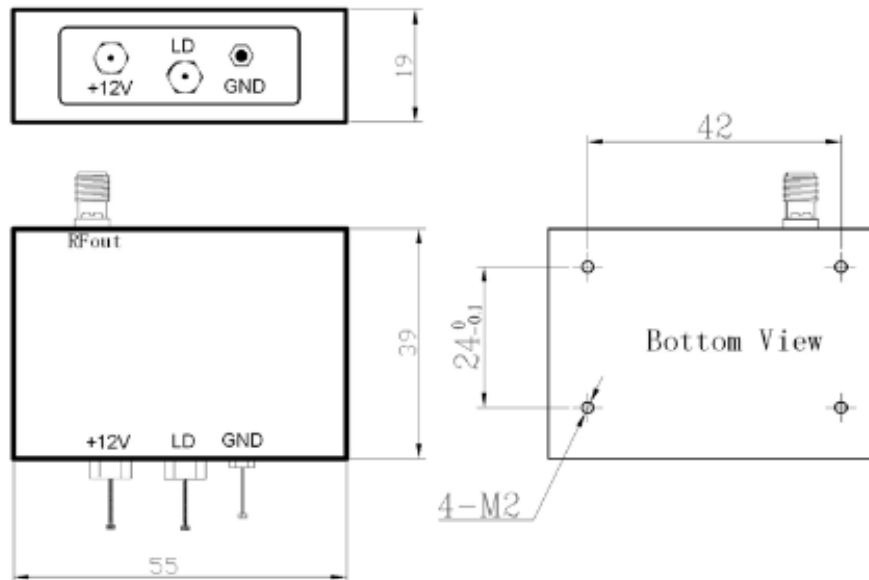

Data subject to change without notice. For current data sheets, please contact: sales@aacix.com