
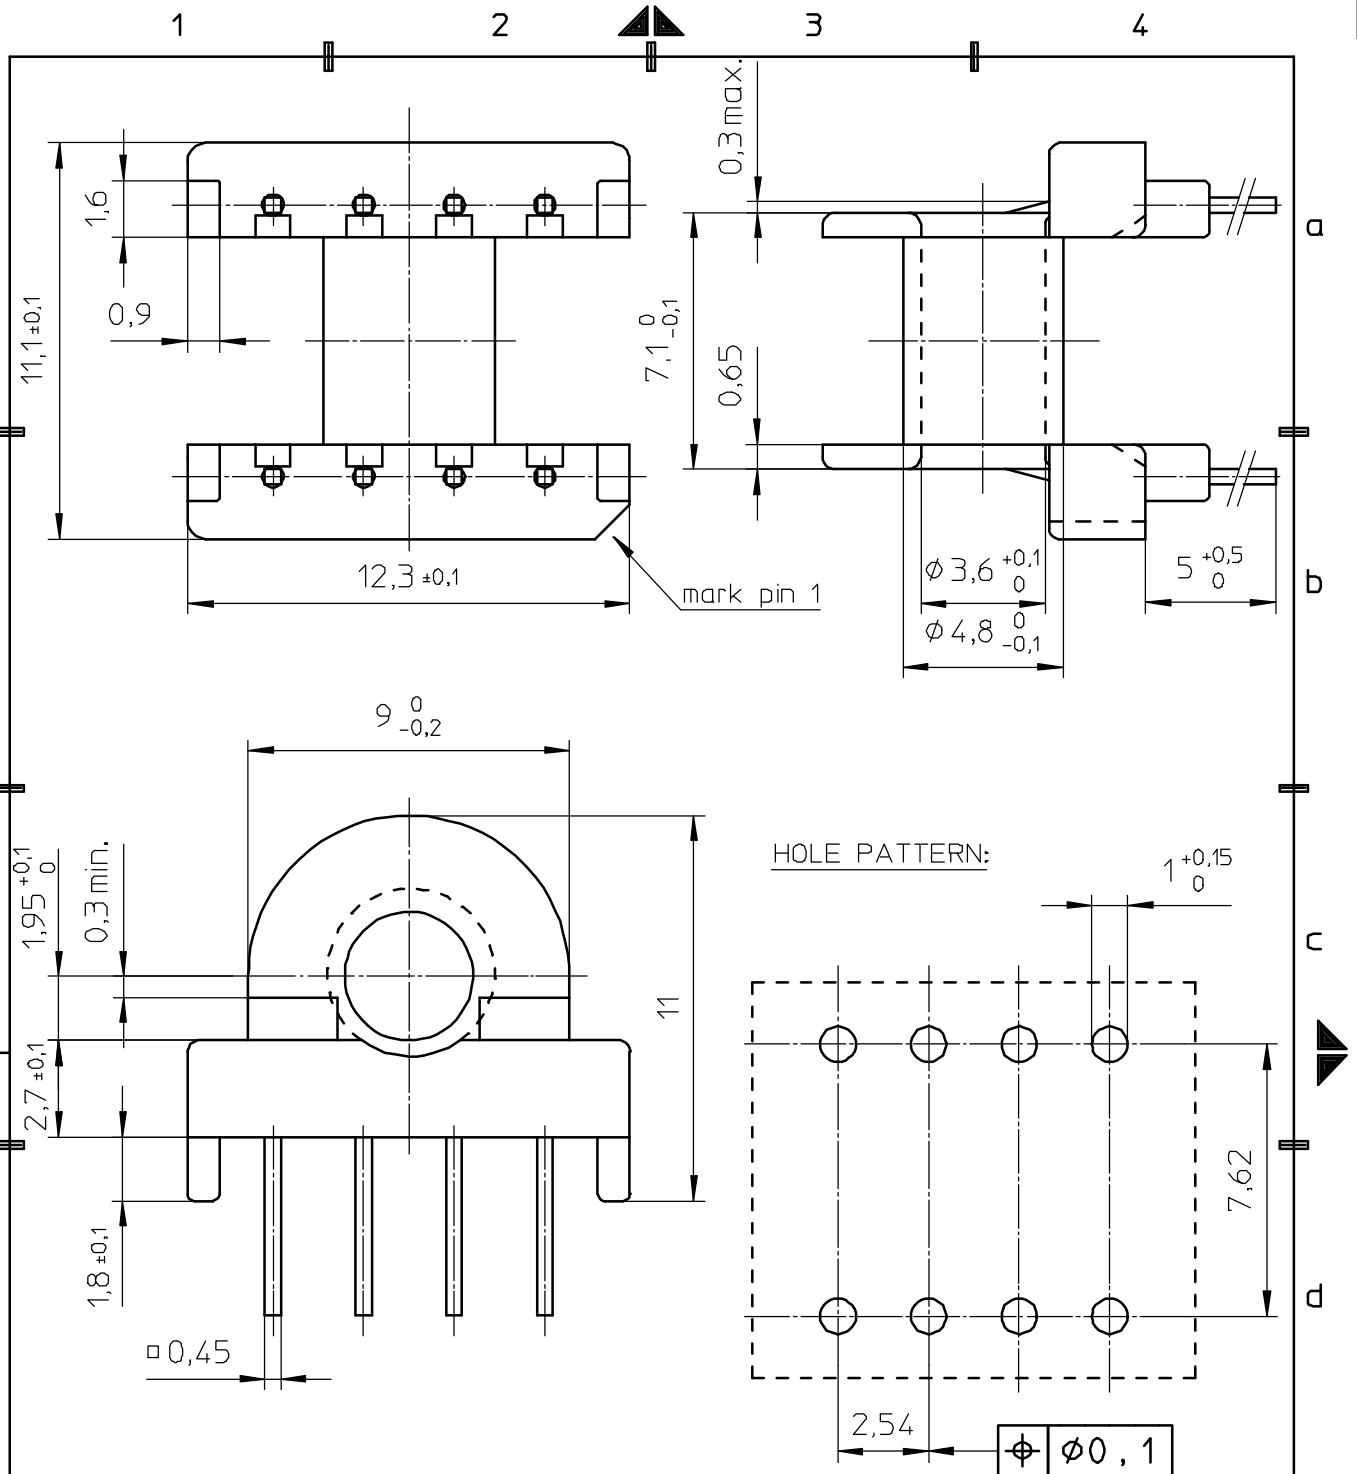





Coil former material: Sumikon PM9820 (PF), glass-reinforced.
 UL file number: E41429 - UL94V-0.
 Pin material: Copper-clad steel, Sn plated.
 Max. operating temp.: acc. to IEC 60 085 class H, 180°C.
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5s
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s
 Min. winding area: 11,4 mm²
 Mean length of turn: 21,4 mm.

CLASS NO.		CSH-EP10-1S-8P		4322 021 00461		1	93-12-17					
						1	96-01-23					
						1	97-01-09					
						1	99-10-06					
						1	2004-09-28					
NAME NAAM	M.Veekens	SUPERS. VERV.		1	SH BL	SH BL	112	-	001	010		A4
MPA		CHECK CONTR.	DAT.	93-11-16	Property of Eigendom van		© FERROXCUBE 2000					