

High Pass Filter

EPB5023G




- Optimized for Broadcom BCM 6010 •
- Robust construction allows for IR/VP processes •
- Available in SMD, DIP and DIL Packages •

Electrical Parameters @ 25° C


Cut-off Frequency (MHz±0.2)	Insertion Loss (dB Max.)	Return Loss (dB Min.)	Attenuation (dB Min.)		Group Delay (nS Max.)
			@ 300-1000 KHz	@ 1.1 MHz	
1.2	1.5 - 10 MHz -1	1.5 - 10 MHz -10	-45	-18	1.5 -10 MHz 800

- Characteristic Filter Impedance : 100 Ω •

Schematic



Package

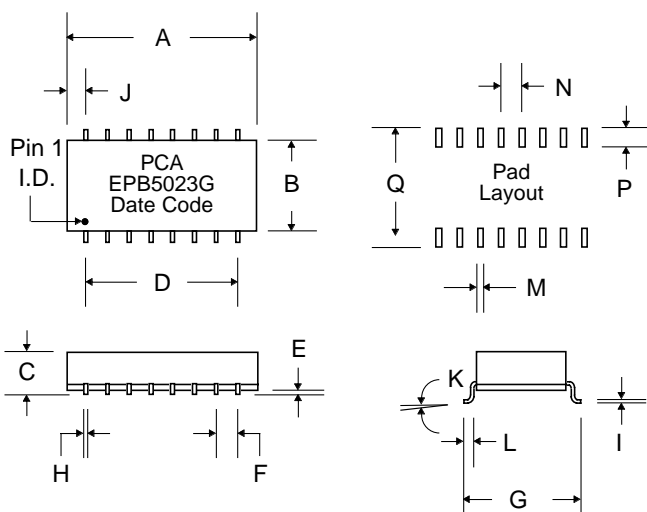

Dimensions

Dim.	(Inches)			(Millimeters)		
	Min.	Max.	Nom.	Min.	Max.	Nom.
A	.975	.985	.980	24.77	25.02	.762
B	.380	.400	.390	9.65	10.16	9.91
C	.223	.243	.233	5.66	6.17	5.92
D	---	---	.700	---	---	17.78
E	.003	.020	---	.076	.508	---
F	---	---	.100	---	---	2.54
G	.500	.520	.510	12.70	13.21	12.95
H	.016	.020	.019	.406	.508	.481
I	.008	.012	.010	.203	.305	.254
J	---	---	.140	---	---	3.56
K	0°	8°	---	0°	8°	---
L	.025	.045	.035	.635	1.14	.889
M	---	---	.030	---	---	.762
N	---	---	---	---	---	---
P	---	---	.092	---	---	2.34
Q	---	---	.560	---	---	14.22