

Features

- Single phase filter.
- Leak current lower than 1.0mA (250V_{AC}, 60Hz).




Safety Agency	Standard	File No.
UL	: UL-1283	E78644
TUV	: EN133200	R9751132

Applications


- Large power supplies, UPS, and Information processing devices.




Dimensions

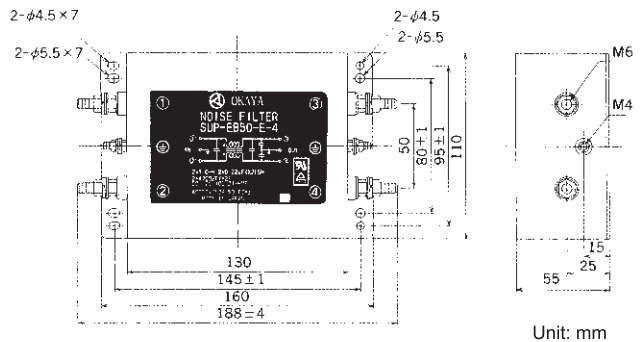

Static characteristics

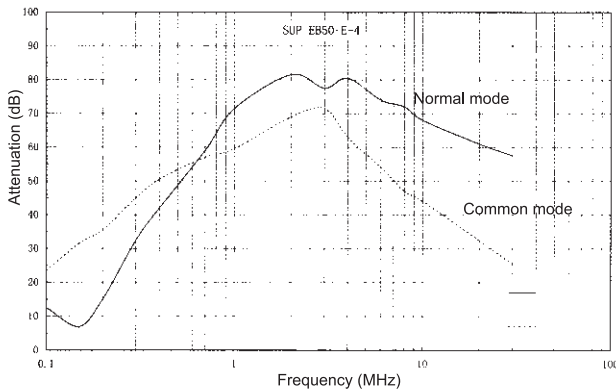

Circuit



Electrical Specifications

Rated Voltage **250VAC**

Safety Agency	Model Number	Rated Current (A)	Test Voltage	Insulation Resistance	Leakage Current (max)	Voltage Drop (max)	Temperature Rise (max)	Operating Temperature (°C)	Insertion losses	
									Normal Mode (MHz)	Common Mode (MHz)
	SUP-EB50-E-4	50	Line to Line 1000Vrms 50/60Hz 60sec Line to Ground 2000Vrms 50/60Hz 60sec	Line to Ground 6000MΩmin (at 500V _{DC})	1.0mA (at 250Vrms 60Hz)	Less than 1.0Vrms	35deg	-25 ~ +50	0.5 ~ 30	0.5 ~ 30

Guaranteed attenuation is more than 35dB.