



CHENMKO ENTERPRISE CO.,LTD

SURFACE MOUNT GLASS PASSIVATED HIGH EFFICIENCY SILICON RECTIFIER

VOLTAGE RANGE 50 - 1000 Volts CURRENT 1.0 Ampere

Lead free devices

**UPL11PT
THRU
UPL18PT**



PROVISIONAL SPEC.

FEATURE

- *Small Surface Mounting Type. (SMP)
- * Low forward voltage, high current capability
- * Low leakage current
- * Glass passivated junction
- * High temperature soldering guaranteed :
260°C/10 seconds at terminals

SMP

CIRCUIT

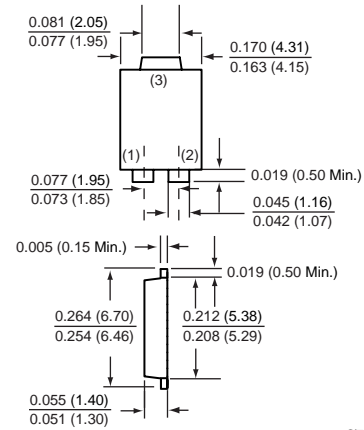

SMP

MAXIMUM RATINGS (At TA = 25°C unless otherwise noted)

RATINGS	SYMBOL	UPL11PT	UPL12PT	UPL13PT	UPL14PT	UPL15PT	UPL16PT	UPL17PT	UPL18PT	UNITS
Maximum Recurrent Peak Reverse Voltage	VRRM	50	100	200	300	400	600	800	1000	Volts
Maximum RMS Voltage	VRMS	35	70	140	210	280	420	560	700	Volts
Maximum DC Blocking Voltage	Vdc	50	100	200	300	400	600	800	1000	Volts
Maximum Average Forward Rectified Current TL = 110°C	Io	1.0								Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	IFSM	30								Amps
Typical Junction Capacitance (Note 1)	CJ	15				12				pF
Operating and Storage Temperature Range	TJ, TSTG	-65 to +150								°C

ELECTRICAL CHARACTERISTICS (At TA = 25°C unless otherwise noted)

CHARACTERISTICS	SYMBOL	UPL11PT	UPL12PT	UPL13PT	UPL14PT	UPL15PT	UPL16PT	UPL17PT	UPL18PT	UNITS	
Maximum Instantaneous Forward Voltage at 1.0 A DC	VF	0.95			1.27		1.75			Volts	
Maximum DC Reverse Current at Rated DC Blocking Voltage at TA = 25°C	IR	5.0								uAmps	
Maximum Full Load Reverse Current Average, Full Cycle at TA = 55°C		50								uAmps	
Maximum Reverse Recovery Time (Note 2)	trr	35					45				nSec

NOTES : 1. Measured at 1.0 MHz and applied reverse voltage of 4.0 volts
2. Test Conditions : IF = 0.5 A, IR = -1.0 A, IRR = -0.25 A

2004-7

RATING CHARACTERISTIC CURVES (UPL11PT THRU UPL18PT)

FIG. 1 - TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

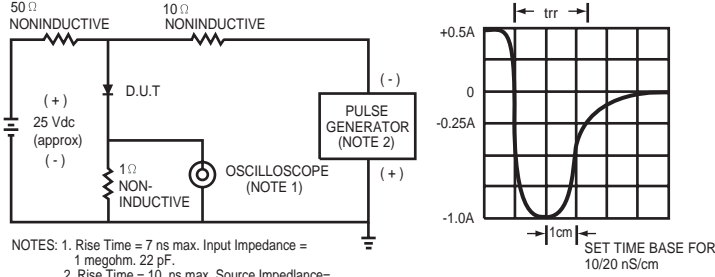


FIG. 2 - TYPICAL FORWARD CURRENT DERATING CURVE




FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

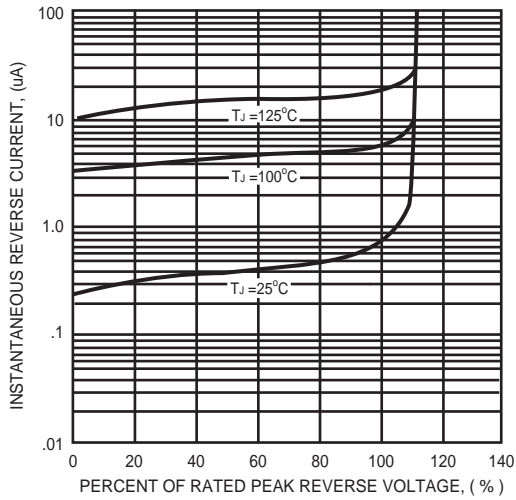


FIG. 4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

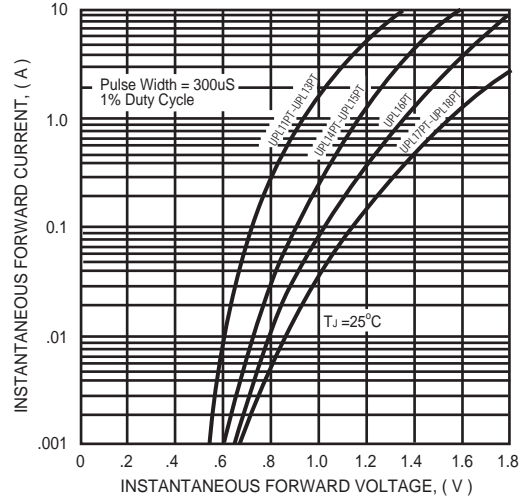


FIG. 5 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

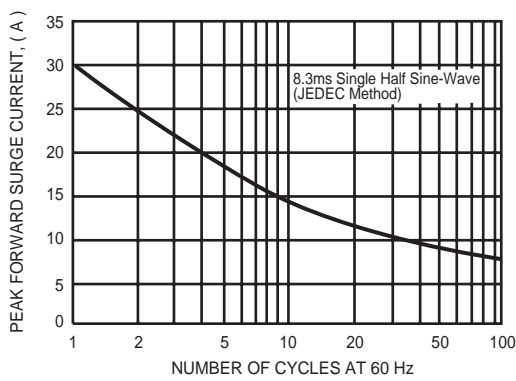


FIG. 6 - TYPICAL JUNCTION CAPACITANCE

