

# 1S2G THRU 1S4G



## ULTRAFAST EFFICIENT GLASS PASSIVATED RECTIFIER

VOLTAGE: 200 TO 400V


CURRENT: 0.7A

### FEATURE

Molded case feature for auto insertion  
High current capability  
Low leakage current  
High surge capability  
High temperature soldering guaranteed  
250°C /10sec/0.375" lead length at 5 lbs tension  
Glass Passivated chip

### MECHANICAL DATA

Terminal: Plated axial leads solderable per  
MIL-STD 202E, method 208C  
Case: Molded with UL-94 Class V-0 recognized Flame  
Retardant Epoxy  
Polarity: color band denotes cathode  
Mounting position: any

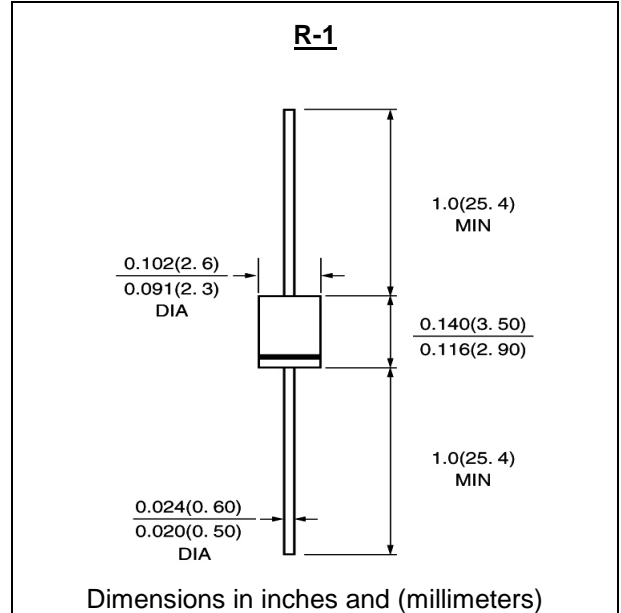

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(single-phase, half-wave, 60HZ, resistive or inductive load rating at 25°C, unless otherwise stated, for capacitive load, derate current by 20%)

	SYMBOL	1S2G	1S4G	units
Maximum Recurrent Peak Reverse Voltage	V <sub>rrm</sub>	200	400	V
Maximum RMS Voltage	V <sub>rms</sub>	140	280	V
Maximum DC blocking Voltage	V <sub>dc</sub>	200	400	V
Maximum Average Forward Rectified Current 3/8" lead length at T <sub>a</sub> =25°C	I <sub>f(av)</sub>	0.7		A
Peak Forward Surge Current 8.3ms single Half sine-wave superimposed on rated load	I <sub>fsm</sub>	15.0		A
Maximum Instantaneous Forward Voltage at rated forward current	V <sub>f</sub>	1.8		V
Maximum full load reverse current full cycle at T <sub>L</sub> =75°C	I <sub>r(av)</sub>	50.0		μA
Maximum DC Reverse Current at rated DC blocking voltage	I <sub>r</sub>	T <sub>a</sub> =25°C	10.0	μA
		T <sub>a</sub> =100°C	100.0	μA
Typical Junction Capacitance (Note 1)	C <sub>j</sub>	15.0		pF
Maximum Reverse Recovery Time (Note 2)	T <sub>rr</sub>	35		nS
Operating Temperature (Note 3)	R(ja)	50.0		°C /W
Storage and Operation Junction Temperature	T <sub>stg</sub> , T <sub>j</sub>	-55 to +150		°C

Note:

1. Measured at 1.0 MHz and applied voltage of 4.0Vdc
2. Test Condition I<sub>f</sub> =0.5A, I<sub>r</sub> =1.0A, I<sub>rr</sub> =0.25A
3. Thermal Resistance from Junction to Ambient at 0.375" lead length, P.C. Board Mounted

RATINGS AND CHARACTERISTIC CURVES 1S2G THRU 1S4G

