


## BOARD TO WIRE CONNECTORS

## POLARISED 2.0mm PITCH

- 2 - 16 ways
- Accepts wire of 28 - 22 AWG
- Housing, Wafer and Terminal Available
- Current rating 2A AC, DC
- Voltage rating 250VAC,DC

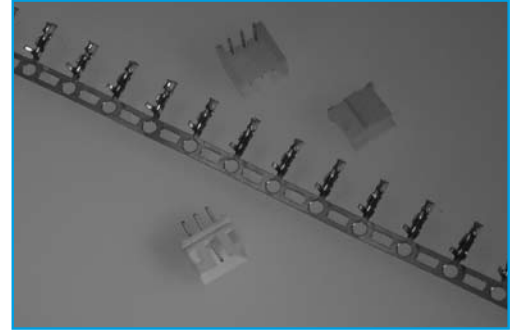

SECTION 8

### SPECIFICATION

#### General

**Withstand Voltage:** 800vAC/min  
**Insulation resistance:** 1000mΩ min  
**Temperature range:** -25 °C to +85 °C

#### Wafer

**Material:**  
**Post:** Brass, Tin/Plated  
**Base:** Nylon 66, UL94V-0


#### Housing

**Material:** Nylon 66, UL94V-0

#### Terminal

**Wire acceptance:** 22-28 AWG  
**Material:** Phos, Bronze  
**Finish:** Tin/Plated 40μ" min  
**Thickness:** 0.2mm

### OUTLINE DRAWING

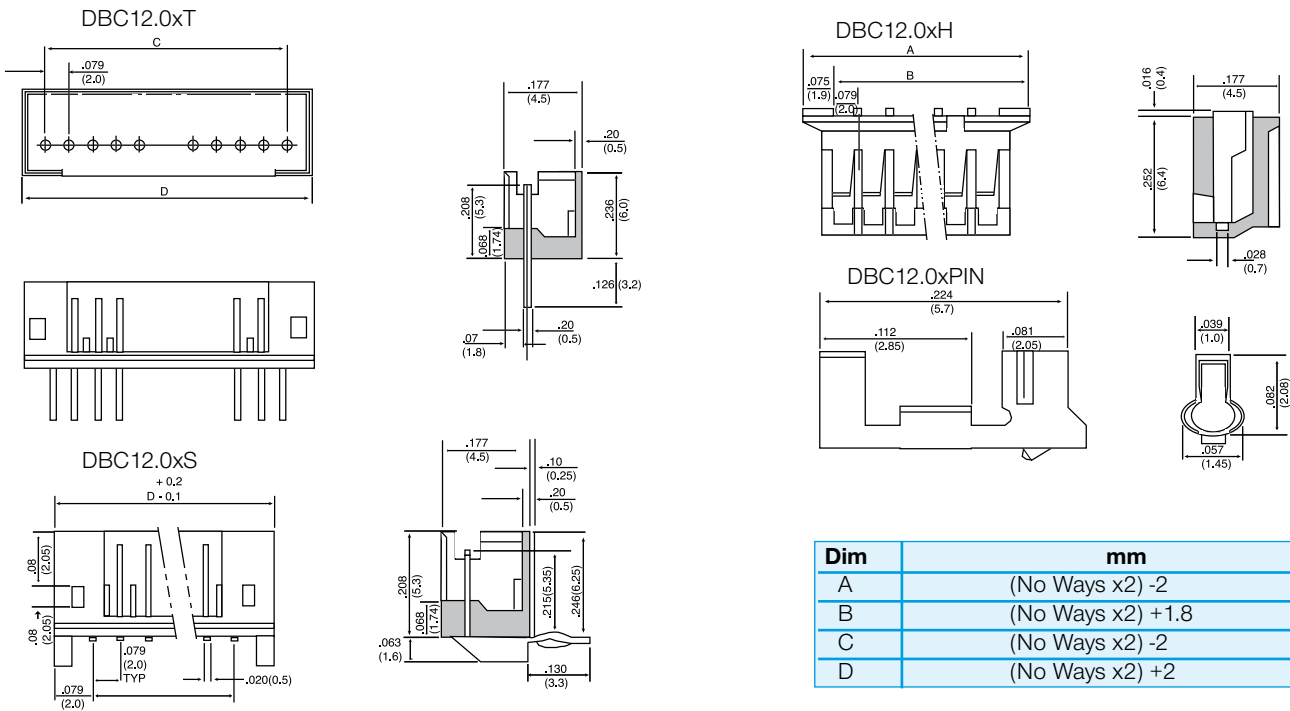

Dim	mm
A	(No Ways x2) -2
B	(No Ways x2) +1.8
C	(No Ways x2) -2
D	(No Ways x2) +2

### ORDERING INFORMATION

DBC	1	2.0	2	T
Dubilier Connectors	Series	Pitch	N° of Ways	Style
		2.0 = 2mm pitch	2 = 2ways 10 = 10ways etc	T = Top Entry S = Side Entry 90° H = Housing

DBC	1	2.0	PIN
Dubilier Connectors	Series	Pitch	PIN
		2.0 = 2mm pitch	