

FERA16G

Ultra fast Plastic Power Rectifiers

VOLTAGE: 400V

CURRENT: 16.0A




FEATURE

Plastic package has Underwriters Laboratories Flammability Classification 94V-0
 Ideally suited for use in very high frequency switching power supplies, inverters and as free wheeling diodes
 Ultra fast recovery time for high efficiency
 Excellent high temperature switching
 Glass passivated junction
 High voltage and high reliability
 High speed switching
 Low forward voltage

MECHANICAL DATA

Case: JEDEC TO-220 molded plastic body over passivated chip
 Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026
 Polarity: Color band denotes cathode end
 Mounting Position: Any

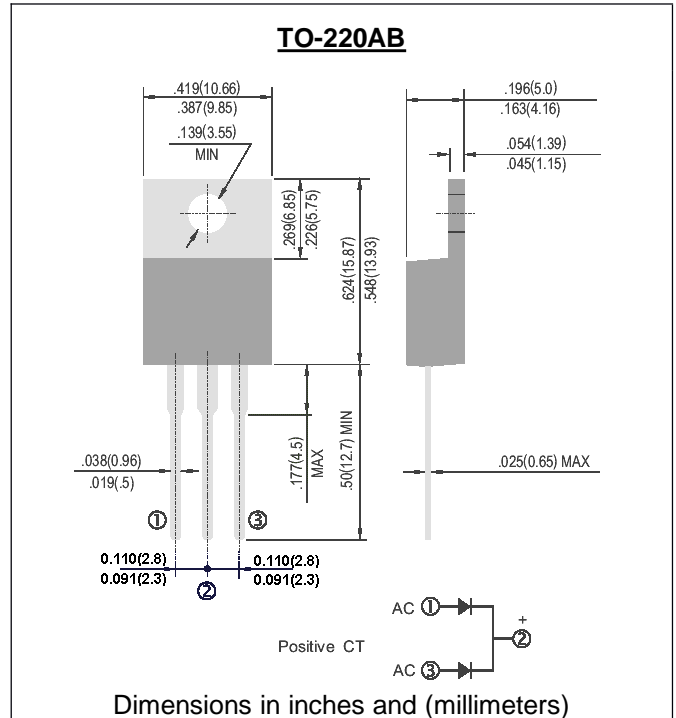

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(single-phase, half-wave, 60HZ, resistive or inductive load rating at 25°C, unless otherwise stated)

	SYMBOL	FERA16G	units
Maximum Recurrent Peak Reverse Voltage	V _{rrm}	400	V
Maximum RMS Voltage	V _{rms}	280	V
Maximum DC blocking Voltage	V _{dc}	400	V
Maximum Average Forward Rectified	I _{f(av)}	16.0	A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load	I _{fsm}	200	A
Maximum Forward Voltage at 8A and 25°C	V _f	1.3	V
Maximum Reverse Recovery Time (Note 1)	T _{rr}	50	nS
Typical thermal resistance junction to case	R _{th(jc)}	5.0	°C/W
Maximum DC Reverse Current Ta =25°C at rated DC blocking voltage Ta =125°C	I _r	10 100	μA
Storage and Operating Temperature Range	T _{stg} , T _j	-55 to +150	°C

Note:
 Reverse Recovery Condition I_f =0.5A, I_r =1.0A, I_{rr} =0.25A

Fig. 1 – Forward Current Derating Curve

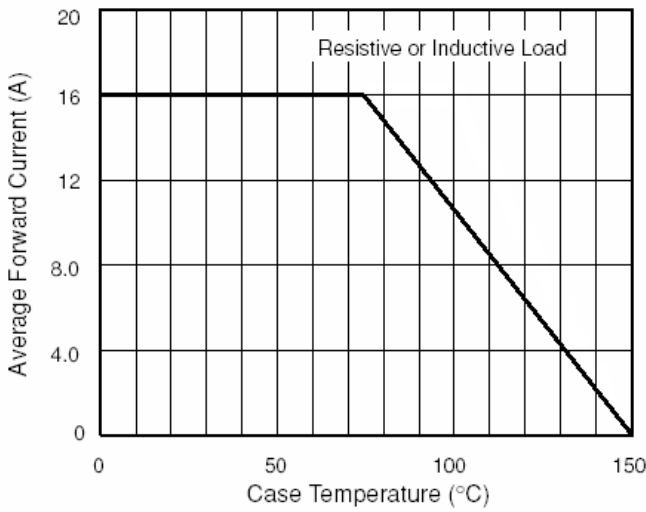


Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current

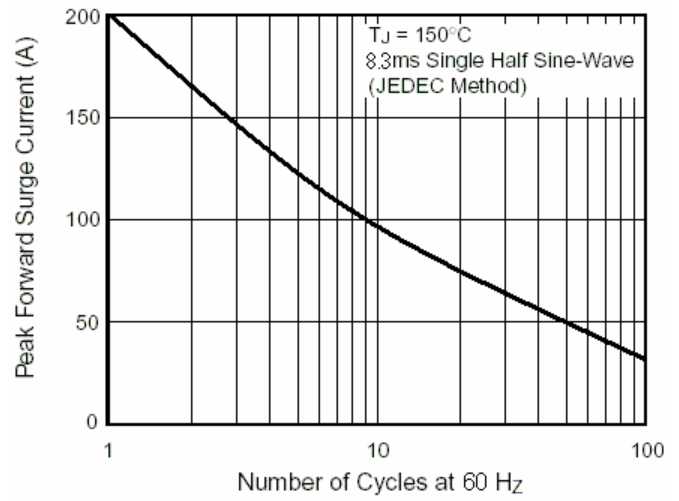


Fig. 3 – Typical Instantaneous Forward Characteristics Per Leg

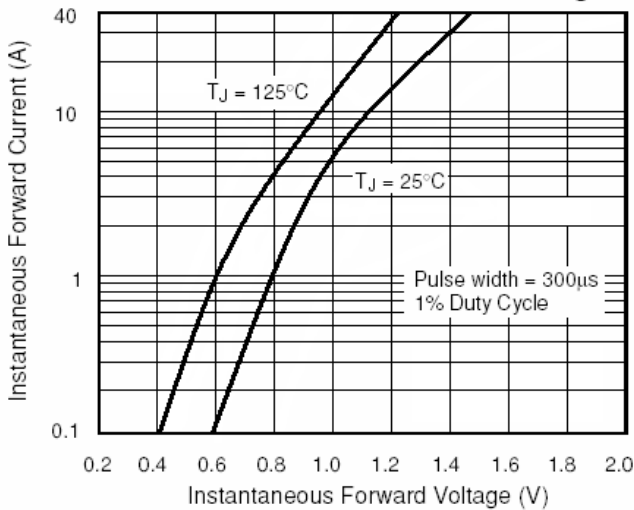


Fig. 4 – Typical Reverse Characteristics Per Leg

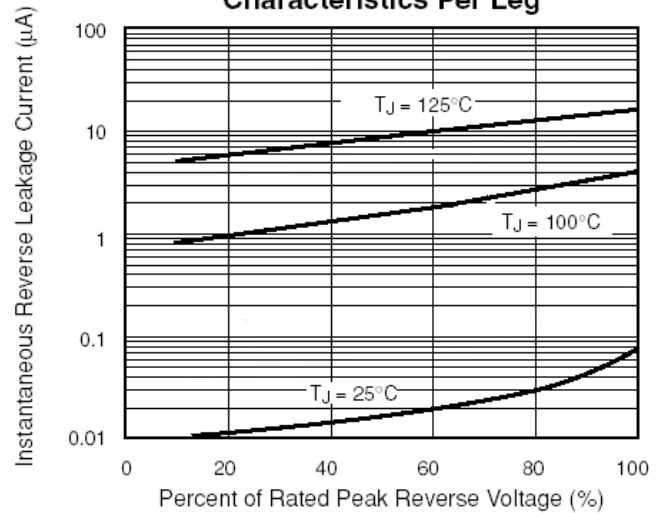


Fig. 5 – Typical Junction Capacitance Per Leg

