


## 25mm Diameter, Single-Turn, Wirewound Industrial Panel Controls

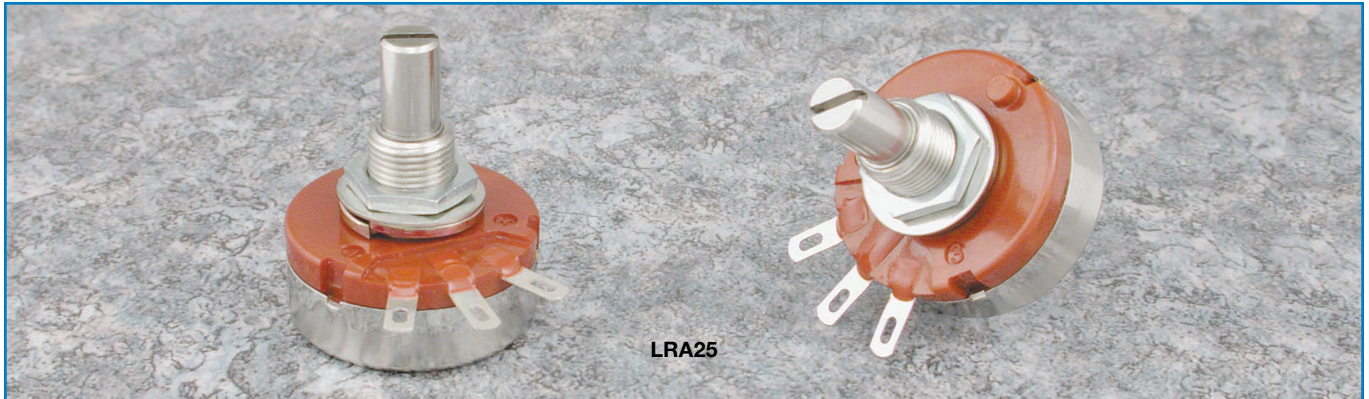

LRA25

### Features

- 25mm diameter, single-turn industrial panel controls
- Wirewound element
- High linearity,  $\pm 0.5\%$  max.
- Single unit, single shaft
- Linear taper
- $\pm 5\%$  standard total resistance tolerance
- Metal shaft and bushing
- Wide operating temperature of  $-10^{\circ}\text{C}$  to  $+100^{\circ}\text{C}$
- Panel mounting style only
- Right angle ear-lug terminals
- 6mm diameter shafts in slot, flat or round end styles
- Standard 20mm shaft length

### Specifications

#### Electrical

**Standard Resistance Range** ..... 500 $\Omega$  to 20k $\Omega$   
**Resistance Tolerance** .....  $\pm 5\%$  standard  
 ( $\pm 2\%$  or  $\pm 1\%$  special order)  
**End Resistance** ..... 0.2% max.  
**Resistance Taper** ..... B = linear  
**Independent Linearity** .....  $\pm 0.5\%$  max.  
**Power Rating** ..... 1.5 watts at  $+40^{\circ}\text{C}$   
**Insulation Resistance** ..... 100M $\Omega$  minimum at 500VDC  
**Dielectric Strength** ..... 500VAC, 1 minute

#### Theoretical Resolution

Resistance ( $\Omega$ )	Resolution (%)	Resistance ( $\Omega$ )	Resolution (%)
500	0.27	5,000	0.12
1,000	0.21	10,000	0.08
2,000	0.17	20,000	0.09

#### Mechanical



**Mechanical Travel** .....  $300^{\circ} \pm 5^{\circ}$   
**Shaft Torque** ..... 70.2 to 306 gf·cm (0.973 to 4.242 oz·in)  
**Stop Strength** ..... 10.2 kgf·cm (141.4 oz·in) max.  
**Mounting Nut Torque** ..... 15 kgf·cm (207.94 oz·in) max.  
**Solderability** .....  $235^{\circ}\text{C}$ , 3 seconds  
**Marking** ..... Taper, resistance, resistance tolerance, terminal identification, date code

#### Environmental

**Temperature Range** .....  $-10^{\circ}\text{C}$  to  $+100^{\circ}\text{C}$   
**Temperature Characteristics** .....  $+85^{\circ}\text{C}$ , 5 hours  
 without load  
 $\Delta T/R \leq \pm 5\%$   
**Low Temperature Exposure** ...  $-10^{\circ}\text{C}$ , 1 hour without load  
 $\Delta T/R \leq \pm 3\%$   
**Load Life** .....  $+40^{\circ}\text{C}$ , 1,000 hours with rated load  
 $\Delta T/R \leq \pm 3\%$   
**Moisture and Load Life** .....  $+40^{\circ}\text{C}$ , 90-95% RH,  
 500 hours with 1/10 rated load  
 $\Delta T/R \leq \pm 5\%$   
**Vibration** ..... 10-55Hz, 1.5mm amplitude,  
 2 directions, 2 hours each  
 $\Delta T/R \leq \pm 1\%$   
**Soldering Heat Resistance** .....  $350^{\circ}\text{C}$ , 3.5 seconds  
 $\Delta T/R \leq \pm 2\%$   
**Rotational Life** ..... 15,000 cycles with 1/2 rated load  
 $\Delta T/R \leq \pm 3\%$


$\Delta T/R$  = Total Resistance Change

**LRA25**  
**Panel Mount, Single Unit, Single Shaft**  
**Right Angle Ear-Lug Terminals**

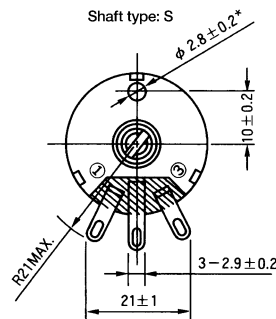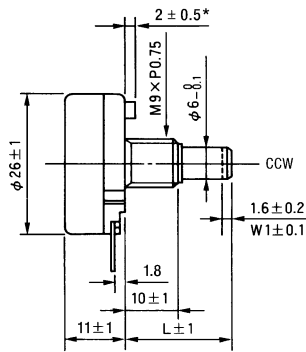

\*Anti-Rotation/Locating Lug

**Recommended Panel Mounting Holes**



**Part Numbering System**

**L RA 25 20 S B 103 J**

NOTE: FMS = From Mounting Surface

**Resistance Tolerance: J** = ±5% (standard).  
**G** = ±2% (special order).  
**F** = ±1% (special order).

**Resistance Code:** Expressed in ohms. A three digit code where the first two digits are significant figures, and the third digit indicates the number of zeros that follow these figures (i.e., 100 = 10Ω; 101 = 100Ω; 102 = 1,000Ω; 103 = 10,000Ω; 105 = 1,000,000Ω). See table for standard resistance values.

**Resistance Taper: B** = Linear.

**Shaft End Style: S** = Slotted.  
**F** = Flatted.  
**R** = Round.

**Standard Shaft Length: 20** = 20mm FMS.  
 Up to 50mm shaft length available (special order).

**Size: 25** = 25mm Diameter.

**TOCOS Series Name: RA** = Wirewound Element.

**Linearity: L** = High Linearity, ±0.5% Max.

**Standard Resistance Values and Part Numbering Codes**

**Standard Nominal Total Resistance Values and Part Numbering Codes**

Resistance (Ω)	Code	Resistance (Ω)	Code	Resistance (Ω)	Code
500	501	1,000	102	10,000	103
		2,000	202	20,000	203
		5,000	502		

Refer to Shaft End Styles Specifications and Hardware Specifications for details and availability.  
 For additional information, refer to Guidelines and Precautions for Using Panel Controls.