

MAFL-008070-CL0AD0

CATV MoCA Low Pass Filter
50 - 870/ 975 - 1525 MHz

M/A-COM Products
Released - Rev. V2

Features

- 75 Ohm
- SMT unit
- RoHS Compliant

Description

- M/A-COM's MAFL-008070-CL0AD0 is a surface mount Low-Pass Filter unit designed for MoCA applications.

Ordering Information

Part Number	Package
MAFL-008070-CL0AD0	SM-173
MAFL-008080-CL0ATB	Customer Evaluation Board


Pin Configuration

Function	Pin Number
Port 1	8
Port 2	3
Ground	1, 2, 4-7
Not connected	-

Product Image



Functional Schematic

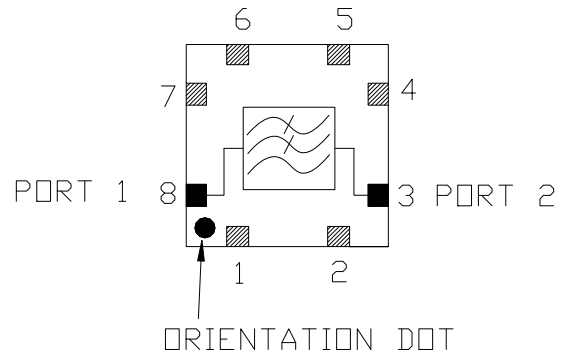


Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 75\Omega$

Parameter	Units	Typ	Min	Max
Insertion Loss 50-750MHz	dB	0.75	-	1
Insertion Loss 750-870MHz	dB	1.8	-	2
Stopband Rejection 975-1525MHz	dB	34	30	-
Stopband Rejection 1790-2100MHz	dB	30	25	-
Input Return Loss 50-870MHz	dB	13	12	-


Absolute Maximum Ratings

Parameter	Absolute Maximum
Storage Temperature	-40°C to +85°C
Operating Temperature	-40°C to +85°C
DC Current	30mA
RF Power	250mW

Outline Drawing: SM-173

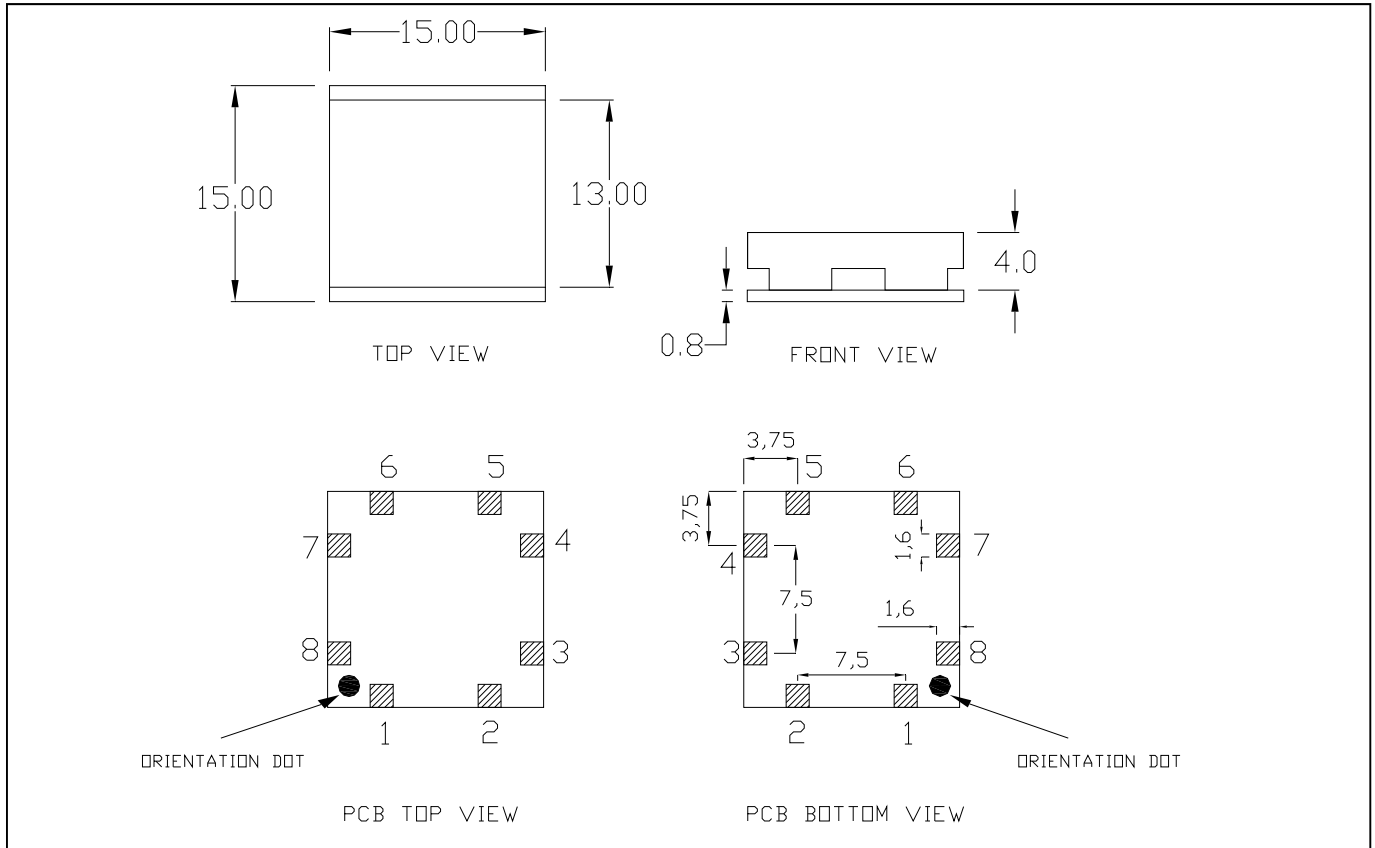

Recommended PCB Configuration

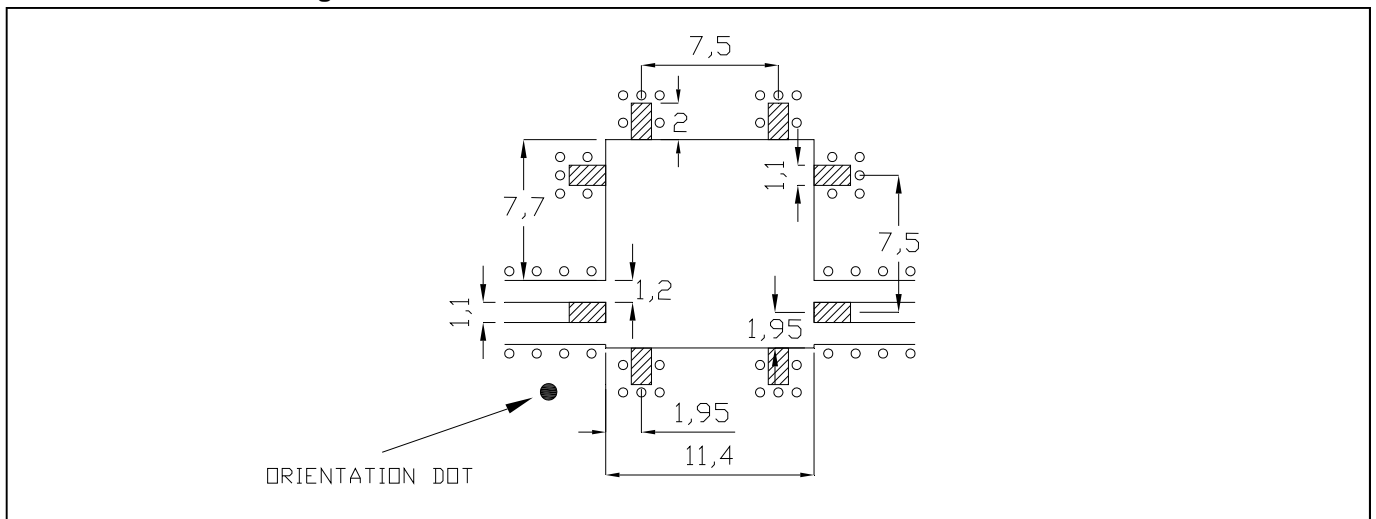

* Dimensions are millimeters ± 0.1 unless otherwise specified.

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400
 • **India** Tel: +91.80.4155721 • **China** Tel: +86.21.2407.1588
 Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

Typical Performance Curves at +25°C

