



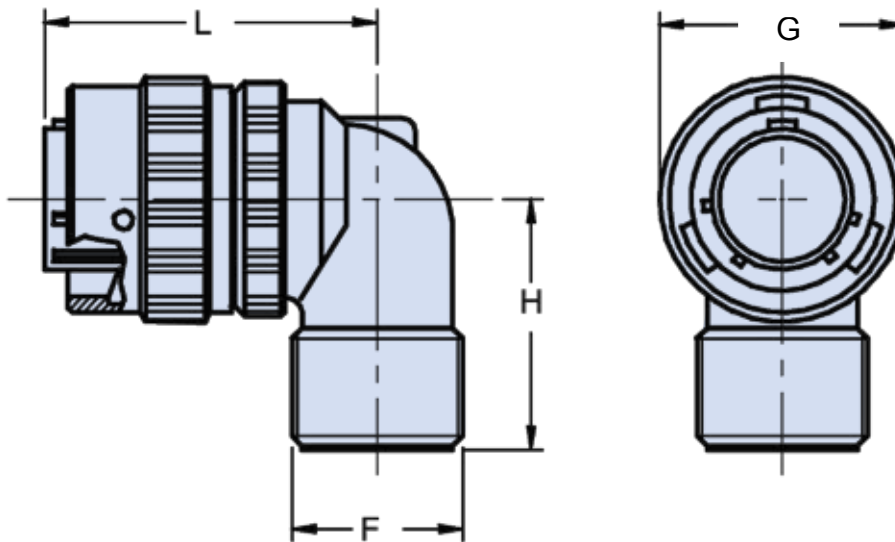

# IPT 08 AM Plug Connector with 90° EMI Shield Termination Backshell Suitable for MS3057 Cable Clamp (Not Included)

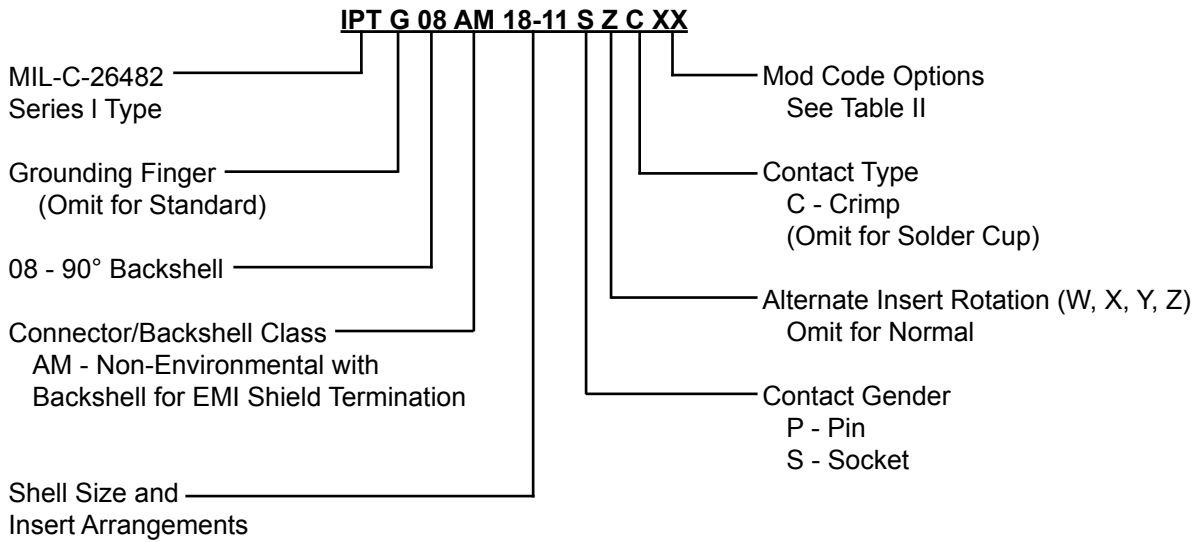

## APPLICATION NOTES

1. Plug with 90° backshell for cable clamp MS3057-A/B/C (not included).
2. Connector/Backshell Class "A" (non-environmental)—no grommet supplied.
3. Standard materials configuration consists of aluminum alloy with stainless steel coupling pins.
4. Standard contact material consists of copper alloy with gold plating over nickel.
5. A broad range of other front and rear connector accessories are available. See our website and/or contact factory for complete information.
6. Standard insert is high insulation synthetic rubber.

**IPT 08 AM**  
**Plug Connector**  
 with 90° EMI Shield Termination Backshell Suitable for  
 MS3057 Cable Clamp (Not Included)



**TABLE I: DIMENSIONS**

Shell size	F Thread in inches	G Max.	H ±1	L ±1
8	.5000 - 28 UNEF	19.05	19	32
10	.6250 - 24 UNEF	21.80	24	32
12	.7500 - 20 UNEF	26.20	27	35
14	.8750 - 20 UNEF	29.40	28	38
16	1.0000 - 20 UNEF	32.55	30	41
18	1.1875 - 18 UNEF	35.35	32	44
20	1.1875 - 18 UNEF	38.90	34	48
22	1.4375 - 18 UNEF	42.10	36	51
24	1.4375 - 18 UNEF	45.10	39	56

**TABLE II: MODIFICATION CODES**

Shell Finish (Omit for Standard Cad/Olive Drab Finish)	Assembly with Accessories (Omit for Standard Version)
<b>F2</b> - Bright Nickel Plating (RoHs)	Key Polarization (Omit for <b>N</b> version) <b>W, X, Y, Z</b> = Alternates
<b>F6</b> - Black Electrodeposited Paint (RoHs)	<b>N0</b> - Connector Less Backshell
<b>F7</b> - Black Zn-Co Plating (RoHs)	<b>GXXX</b> - Custom Designed Connector
<b>F8</b> - Olive Drab Zn-Co Plating	

**STANDARD FINISHES (For QQ-A-591 Aluminum Shells)**

Requirements	IAW RoHS			Not IAW RoHS	
	F2 Electrolytic Nickel	F6 Black Non Conductive	F7 Black Conductive	G3 Cadmium with Olive Drab Passivation	F8 Zinc Cobalt with Olive Drab Passivation
Thermal Shock	-40°C + 100°C	-55°C + 125°C	-55°C + 125°C	-55°C + 125°C	-40°C + 100°C
Salt Spray After Thermal Shock	24 hour	500 hour	500 hour	500 hour	200 hour
Electical Conductivity	Very Good	NO	Very Good	Very Good	Good
Abrasion Resistance	Very Good	Very Good	Good	Very Good	Good