
TS512MJF130

512MB USB2.0 JetFlash™

Description

TS512MJF130 is a 512MB USB Flash Drive with 1 pcs of 512Mx8 Flash Memory assembled on a printed circuit board.

Outline

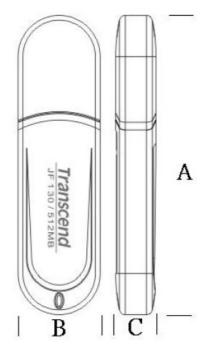

Features

- Frame Color: Orange
- USB 2.0 compatible, true Plug and Play
- Powered directly via the USB port. No external power or battery needed
- LED indicates the usage status of JetFlash[™]
- JetFlash elite software pack includes (Windows
 - 2000/XP/Vista/Windows 7 only):
- Favorites Function: store all your favorite website addresses on the JetFlash™
- AutoLogin Function: automatically login to websites where you have a password
- Secret-Zip Function: compress and/or password protect saved files using 256-bit AES encryption
- PC-Lock Function: makes JetFlash™ a key to your computer
- E-Mail Function: use your JetFlash™ to securely send, receive and save e-mails

DataBackup Function: backup, restore and synchronize your data

System Requirement

- Hardware: Desktop or notebook computer with USB port
- Operating System: Windows[®] 2000 SP4, Windows[®] XP SP2, Windows[®] Vista, Windows[®] 7 and Mac[™] OS 9.0 or later, Linux[™] Kernel 2.4.2 or later

Dimensions


Side	Millimeters	Inches
А	60 ± 1.00	2.36 ± 0.04
В	16.5 ± 1.00	0.67 ± 0.04
С	8.1 ± 1.00	0.32 ± 0.04

TS512MJF130

512MB USB2.0 JetFlash™

Block Diagram

With 1 pcs of 512Mx8 Flash Memory

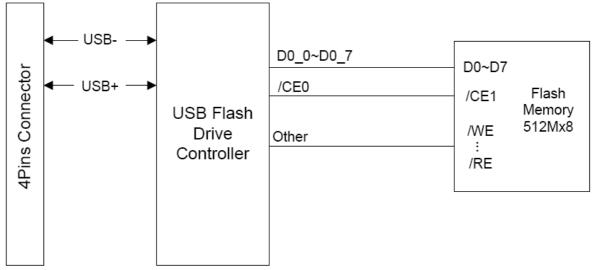

Transcend Information Inc.

TS512MJF130

512MB USB2.0 JetFlash™

Pinouts

Pin No.	Pin Name
01	VCC
02	USB-
03	USB+
04	VSS

Pin Identification		
Symbol	Function	
USB-	USB differential signal:	
USB+	The pairs are used to transmit Data/Address/Command	
VSS	Ground	
VCC	USB power input	

Specifications

Storage Capacity	512MB	
Data Retention	10 years	
Erase Cycles	>100,000 times	
Connector Durability	10,000 times	
System Performance	Read: 10~12MB/sec (max.), Write: 8MB/sec (max.)	
Power Supply	DC 5V±10%, Max current : 200 mA	
Temperature Range	Operation: 0-70°C, Storage: -20°C-75°C	
Weight	10g	
Certificates	CE, FCC, BSMI	

Above technical information is based on industry standard data and tested to be reliable. However, Transcend makes no warranty, either expressed or implied, as to its accuracy and assumes no liability in connection with the use of this product. Transcend reserves the right to make changes in specifications at any time without prior notice.