




1. Mechanical Dimensions:

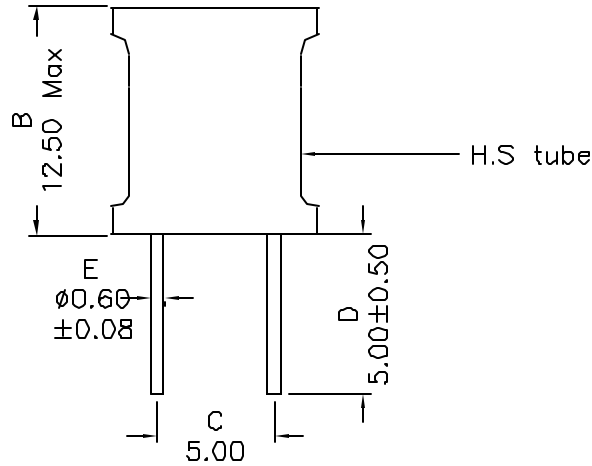

2. Schematic:



3. Electrical Specifications:

Inductance: 64.77uH Typ @1KHz 1.0V

OCL @DC: 63.89uH Typ @1KHz 1.0V,1.0A

DC Resistance: 115 mOhms Typ

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen Index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from 0°C to +70°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

PRELIMINARY

Doc Rev.: A/1

PROPRIETARY Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.

XFMRs Inc. www.XFMRs.com	Title: Radial Leaded Inductor		
	UNLESS OTHERWISE SPECIFIED TOLERANCES:	P/N: XFRL1310-650	REV. A
.xx ±0.25	DWN.	Juan Mao	Jan-03-06
Dimensions in MM	CHK.	YK Liao	Jan-03-06
SHEET 1 OF 1	APP.	BW	Jan-03-06