

**APPLIED
CONCEPTS INC.**

397 Route 281 - P.O. BOX 453
Tully, New York 13159-0453
Phone: (315) 696-6676 Fax: (315) 696-9923
E-mail: www.acipower.com

AC7-12-1296

PRODUCT DATA SHEET

12/11/01

CCFL INVERTER

(For Dual Tube Applications)

The AC7-12-1296 is designed to drive 2 CCFLs to a nominal current level of 6.5mA/tube.

Intensity control (0-100%) is accomplished by the user providing a variable dc level of 0V(off) to 5V(full-on) at pin 3 of CON1.

Enable function 5V indicates on, 0V indicates off is provided on pin 4 of CON1

The lamp outputs are open and short circuit protected.


Specifications:

- Vin = +12V +/- 10%
- CCFL strike voltage = 1450Vrms @ Vin=12V
- CCFL tube current =6.5mA/tube @ 100% intensity/Vin=12V)
- Recommended CCFL sustaining voltage = 600Vrms - 800Vrms
- Nominal tube current frequency = 63khz +/- 10%
- Nominal pwm frequency = 98Hz +/- 3%
- Pwm duty cycle range = 0 to 100%
- Average electrical efficiency >87%

Additional control capability:*

- Simple 1 or 2 button intensity control
- CDS ambient light sensor control
- Two-wire(variable resistance) intensity control

* Please contact factory for information

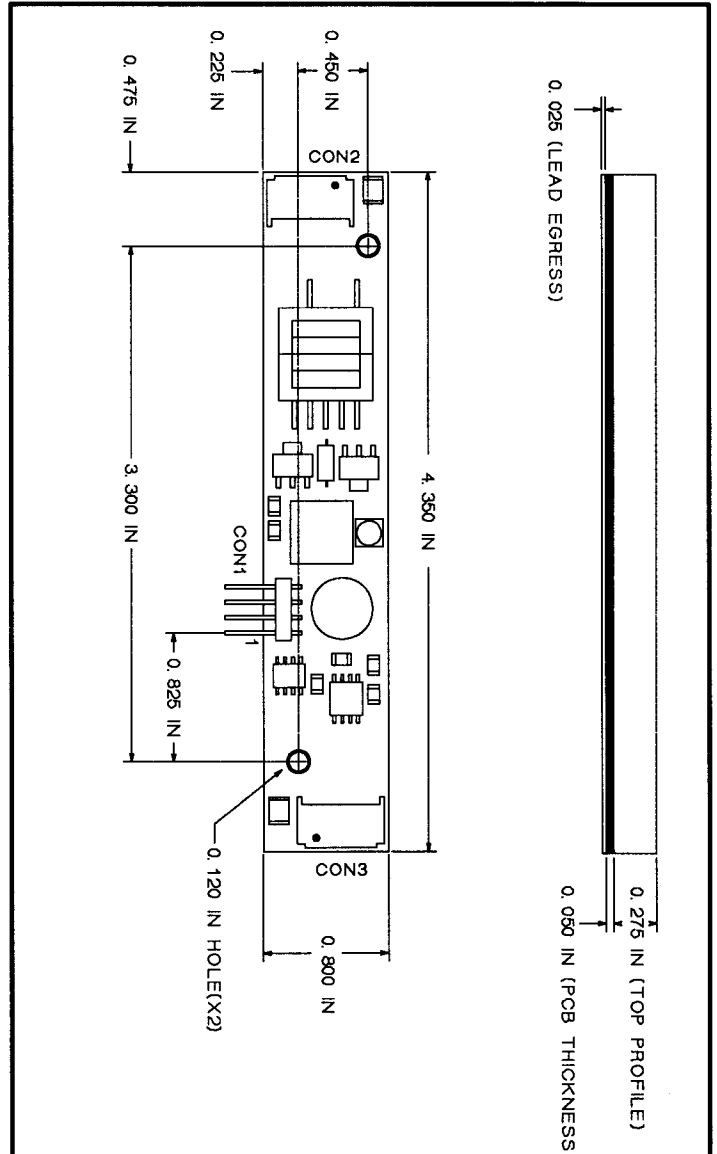

INPUT CONNECTOR CON1 MOLEX 22-28-8041		OUTPUT CONNECTOR CON2,CON3 JST SM03(4.0)B-BHS-1-TB	
PIN #	FUNCTION	PIN #	FUNCTION
1	+VIN	1	CCFL HOT
2	GND	2	NC
3	VCNTL	3	CCFL COLD
4	ENABLE		