


**Broadband Access Transformer**


- Designed to meet UL 60950 and EN 60950 requirements for supplementary insulation
- RoHS Compliant
- Operating Temperature -40°C to 85°C

Electrical Specifications @25°C	
OCL:	PIN 1-5= 3mH ±5% @ 10KHz/0.1V/Ser. (PIN 2-4 Short)
Leakage Indutance:	PIN 1-5= 24uH Max. @ 100KHz/0.1V (PIN 2-4,6-7-9-10 Short)
Interwinding Capacitance	PIN 1-9= 85pF Max. @ 100KHz/0.1V (PIN 2-4,7-9 Short)
D.C.R	PIN 1-4 = 2.25 ohm ±10%
	PIN 2-5 = 2.9 ohm ±15%
	PIN 9-7 = 890 mohm ±10%
	PIN 10-6 = 2.0 ohm ±10%
Hi-POT :	PRI - SEC =3750VAC/60Hz/2Seconds/1mA
Turn Ratio:	PIN1-5 : PIN 9-7 : PIN 10-6= 3.2:1:1±1.5%

**Dimensions** (Units: mm)

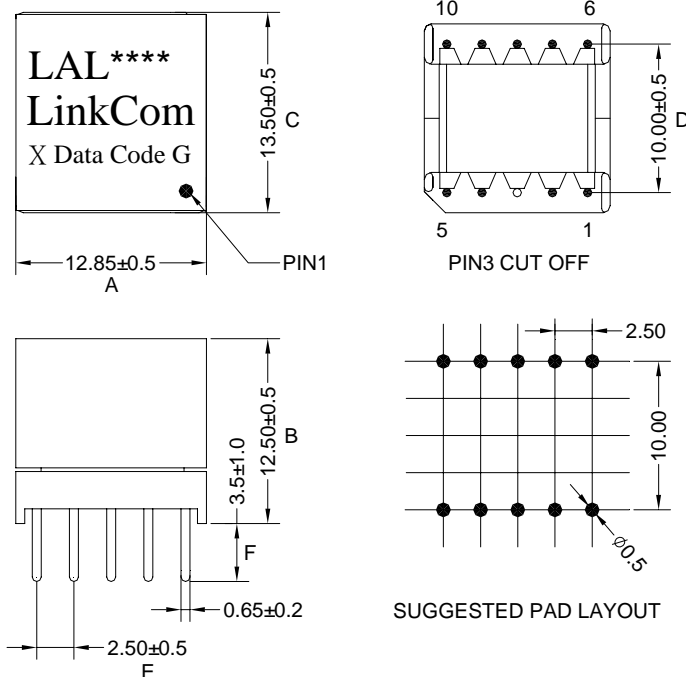

**Schematic**

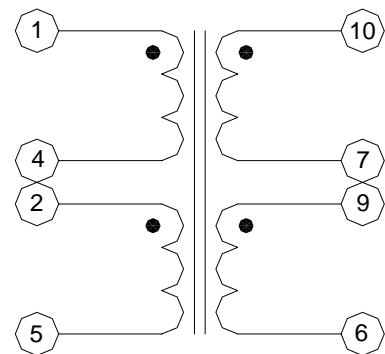

**Mark**

- 1.LAL \*\*\*\*----LAL0213
2. X----PRODUCT LINE
3. DATE CODE----YYWW
4. G----RoHS