




PLL Oscillator

P/N: PLO740

Frequency(MHz)	740
Level(dBm)	+10
Phase Noise(dBc/Hz)	-100 @1KHz
Spurious(dBc)	-75
Frequency Stability(KHz)	± 1 (-10°C ~ +70°C)
Power Supply(V/mA)	+12/80
Connector	SMA-Female
Operating Temperature(°C)	-10 ~ +70

Outline Drawing

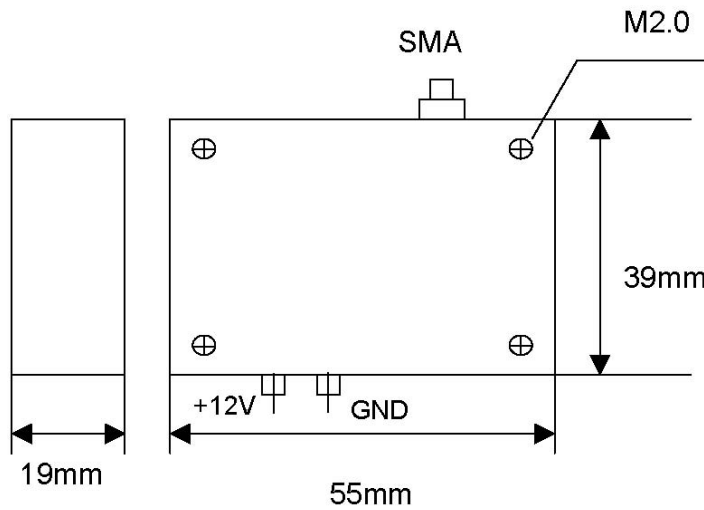

Data subject to change without notice. For current data sheets, please contact: sales@aacix.com