



Surface-mount types ZTACC, ZTCC ZTACS, ZTTCV

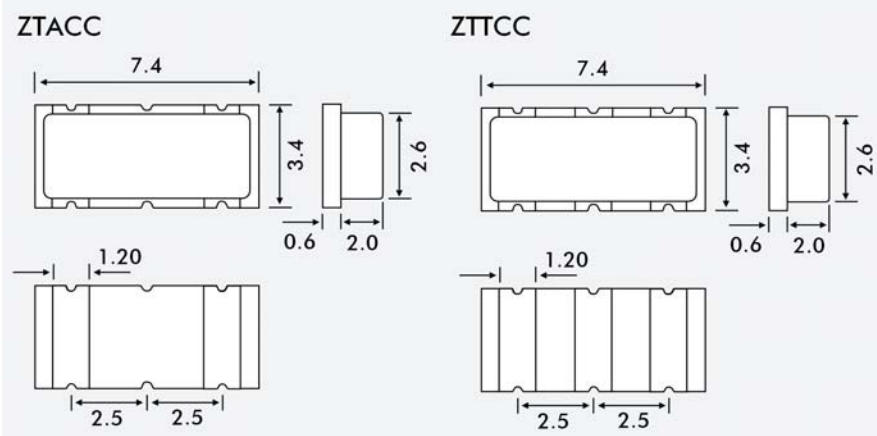

Part Number	Frequency Range (MHz)	Frequency Tolerance ((%))	Resonant Resistance (Ω)	Temperature Characteristics	Ageing (%)
	2.00 to 2.99	$\pm 0.3, \pm 0.5$	100	± 0.3	± 0.5
ZTACC_MG/ZTCC_MG	3.00 to 3.49	$\pm 0.3, \pm 0.5$	50	± 0.3	± 0.5
	3.50 to 8.00	$\pm 0.3, \pm 0.5$	30	± 0.3	± 0.5

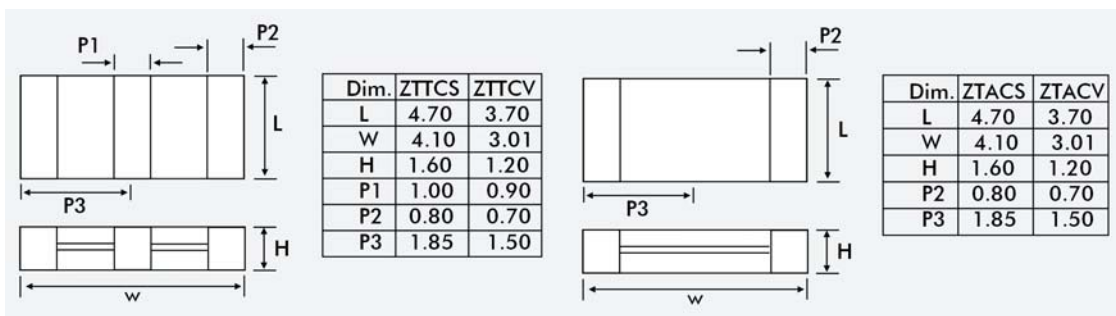

Part Number	Frequency Range (MHz)	Frequency Tolerance ((%))	Resonant Resistance (Ω)	Temperature Characteristics	Ageing (%)
ZTACS_MT/ZTCS_MT	8.00 to 13.00	± 0.5	25	± 0.3	± 0.5
ZTACS_MX/ZTCS_MX	13.01 to 50.0	± 0.5	40	± 0.3	± 0.5
ZTACV_MT/ZTTCV_MT	8.00 to 13.00	± 0.5	40	± 0.3	± 0.5
ZTACV_MX/ZTTCV_MX	13.01 to 50.0	± 0.5	40	± 0.3	± 0.5