


# Ultra-Small CO Driver Transformers

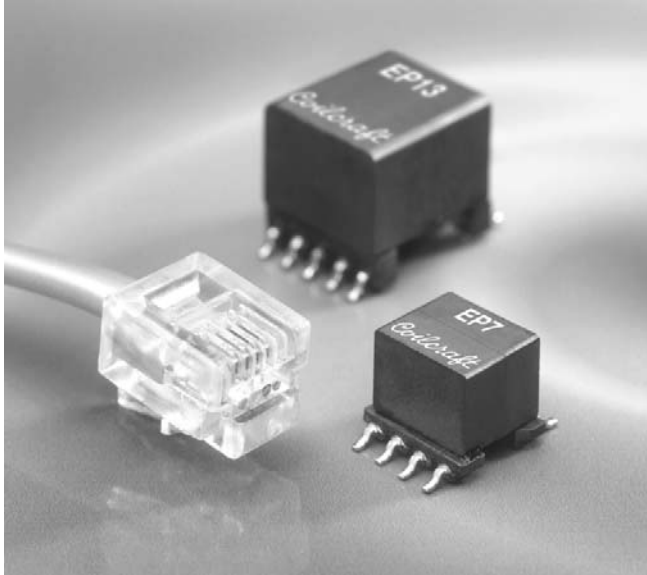

This product is not RoHS-compliant. Contact Coilcraft for current status or possible alternatives.

To meet the demand for even higher density DSLAM configurations, Coilcraft has introduced these ultra-small Central Office magnetics.

These line driver transformers come in an EP7 package. Compared to conventional EP13 designs, they feature:


- 58% less volume (under 0.078 in<sup>3</sup>)
- 42% smaller footprint (just 0.22 in<sup>2</sup>)
- 30% lower height (less than 0.36 in)

Part number	Style	Line side inductance (µH)	Leakage inductance max (µH)	DCR max (Ohms)		Dielectric strength (V)
				Chip side	Line side	
AS8886-B	SMD	1000 ± 6%	6.0	0.44 (8-6), 0.44 (7-5)	0.87 (1-3, 2-4)	1875
AS9006-A	SMD	400 ± 5%	5.0	0.23 (8-6), 0.27 (7-5)	0.80 (1-3, 2-4)	1875
AS9015-A	SMD	474 ± 10%	6.0	0.58 (8-6), 0.75 (7-5)	0.94 (1-3, 2-4)	1875

Part number	Turns ratio line:chip	Capacitance max (pF)	Longitudinal balance (dB) min	THD typ (dB)	Designed to meet
AS8886-B	1.81 : 1	N/A	45 (30 kHz - 1.1 MHz)	-85 at 20 kHz	UL 1950
AS9006-A	1.80 : 1	40	60 (at 100 kHz)	-85 at 100 kHz	UL 1950
AS9015-A	1.41 : 1	35	45 (20 kHz - 1.1 MHz)	-92 at 20 kHz	UL 1950

1. All electrical specifications referenced to line side.
2. Operating temperature range -40° C to +85° C.
3. Electrical specifications at 25° C.

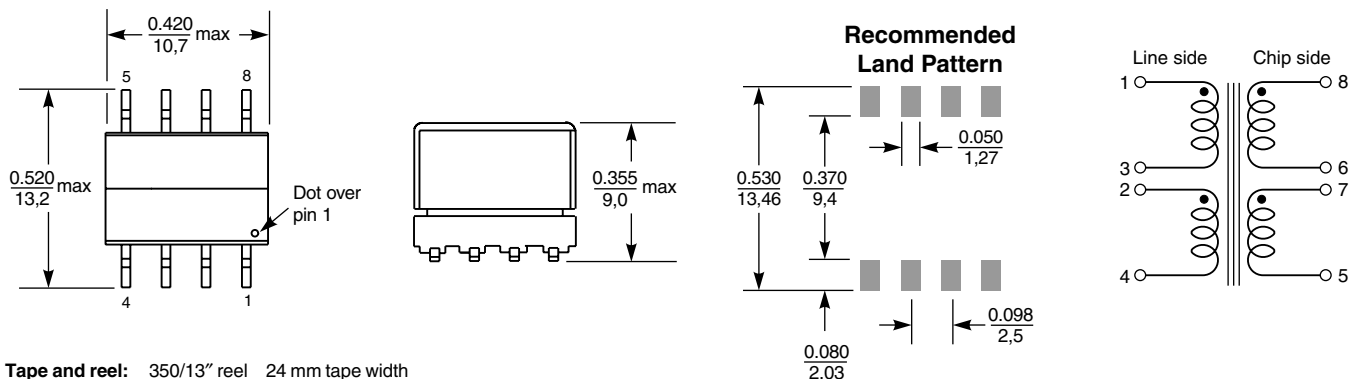

**Tape and reel:** 350/13" reel 24 mm tape width  
For packaging data see Tape and Reel Specifications section.

**Coilcraft**<sup>®</sup>

Specifications subject to change without notice.  
Please check our website for latest information.

Document 243 Revised 06/10/09

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469  
E-mail info@coilcraft.com Web http://www.coilcraft.com