


M24758/9 Adapter for MIL-C-5015 Series 3100 Connectors

M24758/9-16-06-01-A


Basic Part No. _____
 Conduit Size Code _____
 (See Table I)
 A-Thread Code _____
 (See Table II)

Material Designator:
 A = Aluminum
 B = Brass
 C = CRES 316

Style Designator _____

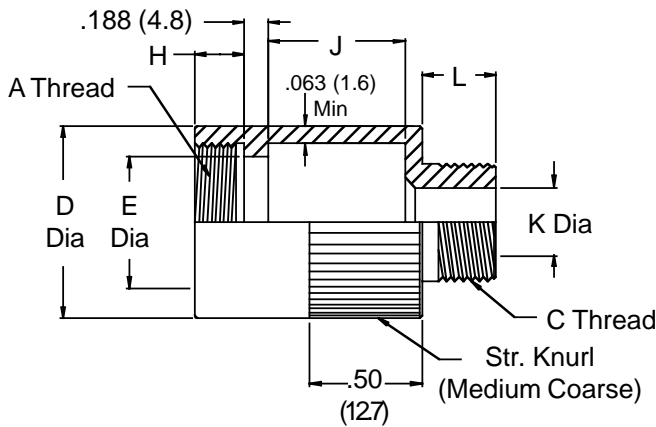

STYLE 01
 FOR USE WHEN E DIAMETER IS
 GREATER THAN K DIAMETER

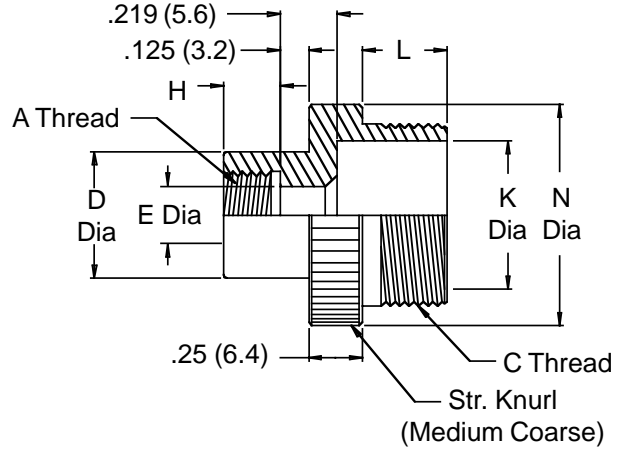

STYLE 02
 SAME AS STYLE 01 EXCEPT
 J DIMENSION IS ZERO

STYLE 03
 FOR USE WHEN E DIAMETER IS
 EQUAL TO OR LESS THAN K DIAMETER

TABLE I

Conduit Size Code	C Thread (Class 2A)	L		K Dia Min.		N Dia	
		±.02	(.5)			±.02	(.5)
02	0.438 - 28 UNEF	.210	(5.3)	.250	(6.4)	.687	(17.4)
03	0.563 - 24 UNEF	.250	(6.4)	.370	(9.4)	.812	(20.6)
04	0.688 - 24 UNEF	.250	(6.4)	.500	(12.7)	.937	(23.8)
05	0.813 - 20 UNEF	.310	(7.9)	.620	(15.7)	1.062	(27.0)
06	0.938 - 20 UNEF	.310	(7.9)	.750	(19.1)	1.187	(30.1)
08	1.250 - 18 UNEF	.370	(9.4)	1.000	(25.4)	1.500	(38.1)
10	1.563 - 18 UNEF	.370	(9.4)	1.250	(31.8)	1.812	(46.0)
12	1.875 - 16 UN	.430	(10.9)	1.500	(38.1)	2.125	(54.0)
16	2.375 - 16 UN	.430	(10.9)	2.000	(50.8)	2.625	(66.7)
20	2.875 - 16 UN	.430	(10.9)	2.500	(63.5)	3.125	(79.4)
24	3.375 - 16 UN	.430	(10.9)	3.000	(76.2)	3.625	(92.1)

1. The M24758/9 adapter couples MIL-C-5015 connectors (MS3100, MS3101, MS3106, and MS-series backshells) to M24758/2, M24758/3 or M24758/4 fittings.
2. For MIL-C-5015, MS3400 Series, the M24758/13 adapter may be used.
2. Metric dimensions (mm) are indicated in parentheses.
3. For complete dimensions see applicable Military Specification.

M24758/9 Adapter for MIL-C-5015 Series 3100 Connectors



TABLE II (MIL-C-5015 Connector Codes)

Connector Code	Class	Manufacturer	Series
A		All Manufacturers	MS-Series Backshell
B	A	Amphenol	MS3100, MS3101, MS3106, 97-3100, 97-3101, 97-3106
C	E & R	Amphenol	MS3100, MS3101, MS3106, 69-3100, 69-3101, 69-3106
D	A, E & R	Bendix	MS3100, MS3101, MS3106, 10-214, 10-720, 10-721, 10-726
E	A	Cannon	MS3100, MS3101, MS3106, CA-3101, CA-3106
F	E & R	Cannon	MS3100, MS3101, MS3106,

TABLE III (A Thread Code and Adapter Dimensions)

A Thread Code	Conn. Shell Size	Conn. Code (Table II)	A Thread (Class 2B)		D Dia		E Dia		J Style 01*		
				H	±.02	(.5)	±.02	(.5)	±.02	(.5)	±.03
01	8S	D	0.375 - 32 UNEF	.180	(4.6)	.500	(12.7)	.280	(7.1)	.500	(12.7)
02	8S	B	0.438 - 27 UNS	.210	(5.3)	.560	(14.2)	.340	(8.6)	.530	(13.5)
03	8	C, E, F	0.438 - 28 UNEF	.210	(5.3)	.560	(14.2)	.340	(8.6)	.530	(13.5)
04	8S	A	0.500 - 28 UNEF	.210	(5.3)	.620	(15.7)	.370	(9.4)	.560	(14.2)
04	10S	A, B, C, D, E	0.500 - 28 UNEF	.210	(5.3)	.620	(15.7)	.370	(9.4)	.560	(14.2)
05	10S	E	0.563 - 24 UNEF	.250	(6.4)	.680	(17.3)	.450	(11.4)	.590	(15.0)
05	10SL	E, F	0.563 - 24 UNEF	.250	(6.4)	.680	(17.3)	.450	(11.4)	.590	(15.0)
06	10SL	A, B, C, D	0.625 - 24 UNEF	.250	(6.4)	.750	(19.1)	.500	(12.7)	.620	(15.7)
06	12, 12S	A, D, F	0.625 - 24 UNEF	.250	(6.4)	.750	(19.1)	.500	(12.7)	.620	(15.7)
07	12, 12S	B, C, E	0.688 - 24 UNEF	.250	(6.4)	.810	(20.6)	.570	(14.5)	.650	(16.5)
08	12SL	A	0.750 - 20 UNEF	.280	(7.1)	.870	(22.1)	.620	(15.7)	.680	(17.3)
08	14, 14S	A, B, C, D, E, F	0.750 - 20 UNEF	.280	(7.1)	.870	(22.1)	.620	(15.7)	.680	(17.3)
09	16, 16S	A, B, C, D, E, F	0.875 - 20 UNEF	.280	(7.1)	1.000	(25.4)	.750	(19.1)	.710	(18.0)
10	18	A, B, C, D, E, F	1.000 - 20 UNEF	.280	(7.1)	1.120	(28.4)	.870	(22.1)	.750	(19.1)
11	20	B, D, E, F	1.125 - 18 UNEF	.280	(7.1)	1.250	(31.8)	1.000	(25.4)	.780	(19.8)
12	20	C	1.125 - 24 UNS	.280	(7.1)	1.250	(31.8)	1.000	(25.4)	.780	(19.8)
13	20, 22	A	1.188 - 18 UNEF	.280	(7.1)	1.310	(33.3)	1.060	(26.9)	.810	(20.6)
14	22	B, C, D, E, F	1.250 - 18 UNEF	.280	(7.1)	1.370	(34.8)	1.120	(28.4)	.870	(22.1)
15	24	B, C, D, E, F	1.375 - 18 UNEF	.280	(7.1)	1.500	(38.1)	1.250	(31.8)	1.000	(25.4)
16	24, 28	A	1.438 - 18 UNEF	.280	(7.1)	1.560	(39.6)	1.310	(33.3)	1.060	(26.9)
17	28	B, C, D, E, F	1.625 - 18 UNEF	.280	(7.1)	1.750	(44.5)	1.500	(38.1)	1.120	(28.4)
18	32	A	1.750 - 18 UNS	.280	(7.1)	1.870	(47.5)	1.620	(41.1)	1.180	(30.0)
19	32	D, E, F	1.875 - 16 UN	.280	(7.1)	2.000	(50.8)	1.750	(44.5)	1.250	(31.8)
20	32	B, C	1.906 - 18	.280	(7.1)	2.030	(51.6)	1.780	(45.2)	1.280	(32.5)
21	36	A	2.000 - 18 UNS	.280	(7.1)	2.120	(53.8)	1.870	(47.5)	1.340	(34.0)
22	36	D	2.063 - 16 UNS	.310	(7.9)	2.180	(55.4)	1.930	(49.0)	1.370	(34.8)
23	36	C	2.063 - 20	.280	(7.1)	2.180	(55.4)	1.930	(49.0)	1.370	(34.8)
24	36	E, F	2.125 - 16 UN	.310	(7.9)	2.250	(57.2)	2.000	(50.8)	1.400	(35.6)
25	36	B	2.125 - 18 UN	.280	(7.1)	2.250	(57.2)	2.000	(50.8)	1.400	(35.6)
26	40	A	2.250 - 16 UN	.310	(7.9)	2.370	(60.2)	2.120	(53.8)	1.500	(38.1)
27	40	D	2.313 - 16 UNS	.310	(7.9)	2.430	(61.7)	2.180	(55.4)	1.560	(39.6)
28	40	B, E, F	2.375 - 16 UN	.310	(7.9)	2.500	(63.5)	2.250	(57.2)	1.620	(41.1)
29	44	B, F	2.625 - 16 UN	.310	(7.9)	2.750	(69.9)	2.500	(63.5)	1.870	(47.5)
30	48	F	2.813 - 18	.280	(7.1)	2.930	(74.4)	2.680	(68.1)	2.060	(52.3)
31	48	B	2.875 - 16 UN	.310	(7.9)	3.000	(76.2)	2.750	(69.9)	2.120	(53.8)

* For Style 02, J Dimension is zero.