

### Specifications

Insulation Resistance:	1,000MΩ min. at 500V DC
Withstanding Voltage:	500V ACrms for 1 minute
Contact Resistance:	100mΩ at 1mA / 20mV max.
Voltage Rating:	50Vrms AC
Current Rating:	0.5A
Operating Temp. Range:	-25°C to +85°C
Mating Cycles:	10,000 (office environment)

### Part Number (Details)

**PJS 008 - 1000**

Series No.

Number of Contacts

Design No.

### Materials and Finish


Insulator:	PC (black)
Card Lock:	SUS
Shell:	SUS, Plating Ni-Au

### Features

- microSD plus adapter is compatible to all miniSD card specifications
- Easy handling of microSD
- Tray packaging



### Outline Dimensions for PJS008-1000

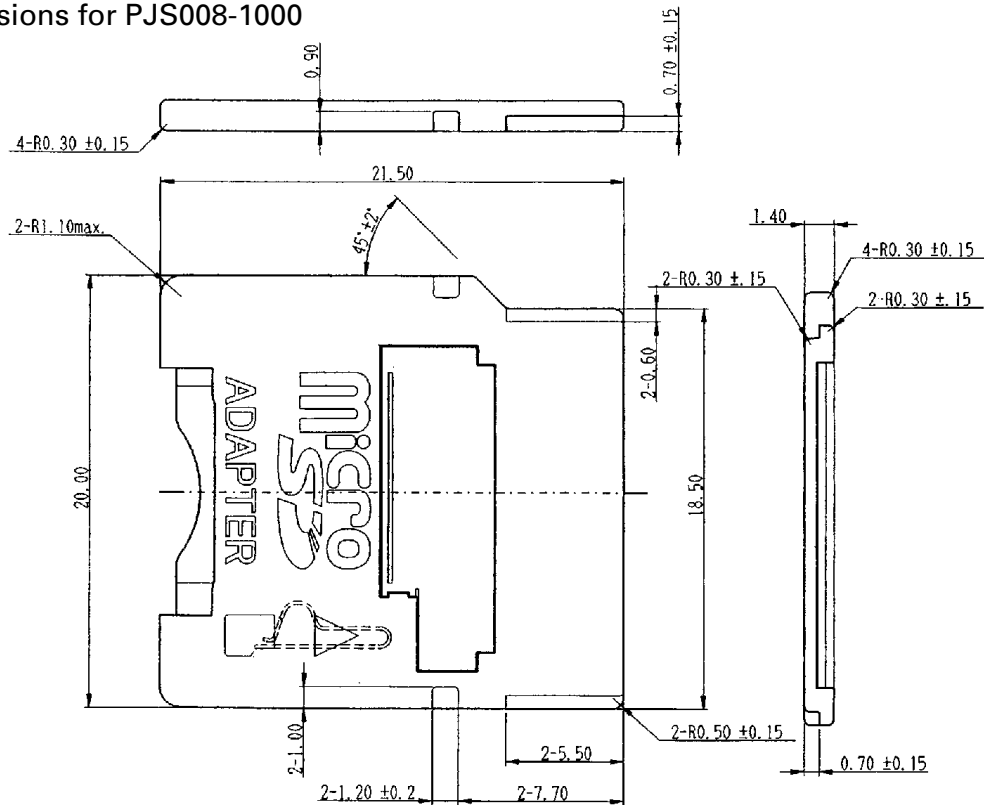

### Contact Area Detail

