


Silicon Controlled Rectifiers (fast)

2N1794F - 2N1800F

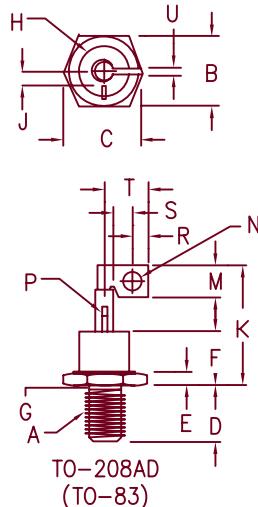

Note 1: 1/2-20 UNF-3A

Note 2: Full thread within 2 1/2 threads

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	---	---	---	---	1
B	1.050	1.060	26.67	26.92	
C	---	1.161	---	29.49	
D	.797	.827	20.24	21.01	
E	.276	.286	.701	7.26	
F	---	.948	---	24.08	
G	.425	.499	10.80	12.67	2
H	---	.900	---	22.86	Dia.
J	.225	.275	6.48	6.99	
K	---	1.750	---	44.45	
M	.370	.380	9.40	9.65	
N	.213	.223	5.41	5.66	Dia.
P	.065	.075	1.65	1.91	Dia.
R	.215	.225	5.46	5.72	
S	.290	.315	7.37	8.00	
T	.514	.530	13.06	13.46	
U	.089	.099	2.26	2.51	

Catalog Number

Forward & Reverse

2N1792F	50V
2N1793F	100V
2N1795F	200V
2N1797F	300V
2N1798F	400V
2N1799F	500V
2N1800F	600V

- 1000 Amperes surge current
- 200V/uS dv/dt
- Fast Turnoff Series 40 uS turn-off time

Electrical Characteristics

Max. RMS on-state current	$I_{T(RMS)}$	110 Amps	$T_C = 87^\circ\text{C}$
Max. average on-state cur.	$I_{T(AV)}$	70 Amps	$T_C = 87^\circ\text{C}$
Max. peak on-state voltage	V_{TM}	2.1 Volts	$ T_M = 220 \text{ A(peak)}$
Max. holding current	I_H	75 mA	
Max. peak one cycle surge current	I_{TSM}	1000 A	$T_C = 87^\circ\text{C}, 60 \text{ Hz}$
Max. $I^2 t$ capability for fusing	$I^2 t$	4,150A ² s	$t = 8.3 \text{ ms}$

Thermal and Mechanical Characteristics

Operating junction temp range	T_J	-65°C to 125°C
Storage temperature range	T_{STG}	-65°C to 150°C
Maximum thermal resistance	$R_{\theta JC}$	0.40°C/W Junction to case
Typical thermal resistance (greased)	$R_{\theta CS}$	0.20°C/W Case to sink
Mounting torque		100-130 inch pounds
Weight		3.24 ounces (91.8 grams) typical

2N1794F — 2N1800F

Switching

Critical rate of rise of on-state current (note 1)	di/dt	100A/usec.	$T_J = 125^\circ C$
Typical delay time (note 1)	t_d	3.0 usec.	
Typical circuit commuted turn-off time (note 2)	t_q	40 usec.	$T_J = 100^\circ C$
Note 1: $I_{TM} = 50A$, $V_D = V_{DRM}$, $V_{GT} = 12V$ open circuit, 20 ohm–0.1 usec. rise time			
Note 2: $I_{TM} = 50A$, $di/dt = 50A$ (pk), $t_{on} = 100 + 50$ usec, $-di/dt = 25A/usec$, $V_R = 50V$ $dv/dt = 20V/usec$. V_{DRM} = rated			

Triggering

Max. gate voltage to trigger	V_{GT}	3.0V	$T_J = 25^\circ C$
Max. nontriggering gate voltage	V_{GD}	0.25V	$T_J = 125^\circ C$
Max. gate current to trigger	I_{GT}	70mA	$T_J = 25^\circ C$
Max. peak gate power	P_{GM}	5W	
Average gate power	$P_{G(AV)}$	0.5W	$t_p = 10$ usec.
Max. peak gate current	I_{GM}	2.0A	
Max. peak gate voltage (forward)	V_{GM}	10V	
Max. peak gate voltage (reverse)	V_{GM}	-5.0V	

Blocking

Max. leakage current	I_{DRM}	5mA	$T_J = 125^\circ C$ & V_{DRM}
Max. reverse leakage	I_{RRM}	5mA	$T_J = 125^\circ C$ & V_{RRM}
Critical rate of rise of off-state voltage	dv/dt	200V/usec.	$T_J = 125^\circ C$

2N1794F - 2N1800F

Figure 1
Typical Forward On-State Characteristics

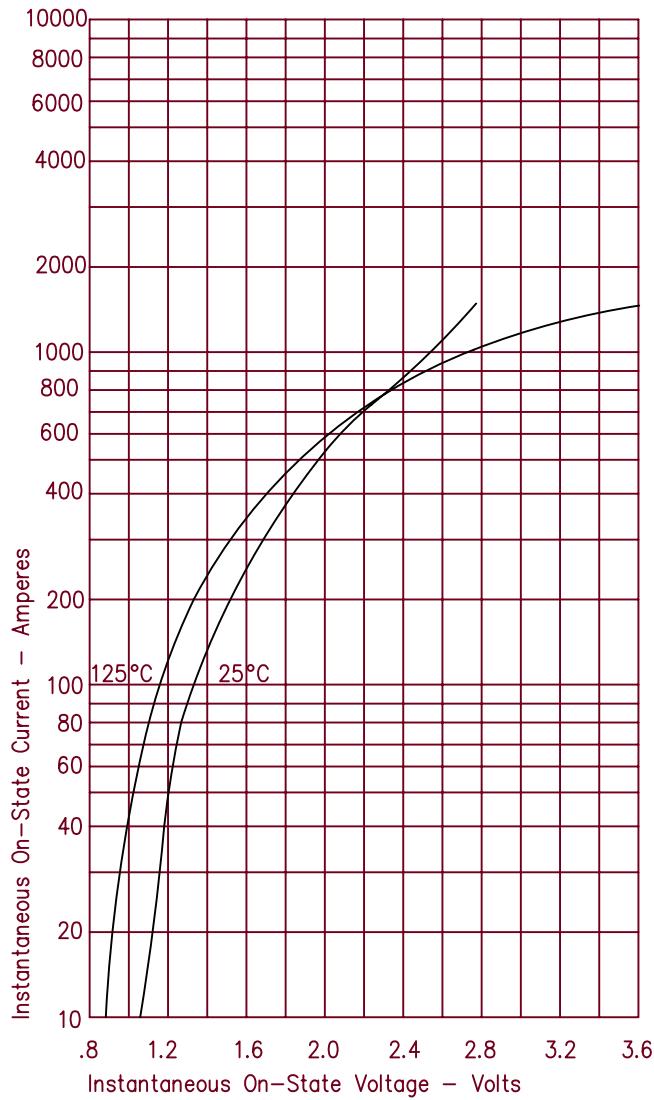


Figure 2
Forward Current Derating

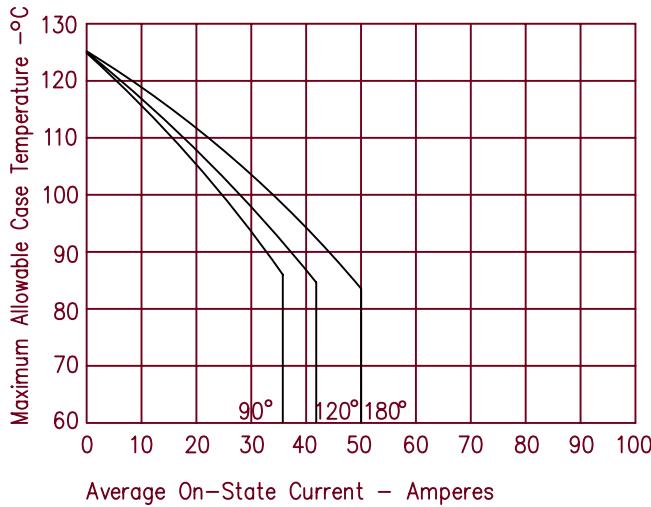


Figure 3
Transient Thermal Impedance

