


Notes:

- 1.Any open miswiring & short & intermittent are not permitted
- 2.Cirris 1000H+or equivalent cable tester using following parameters: 300V DC 1mS,10Mohm min & 2.0ohm max.
3. CPK Measure point Y1-Y4.

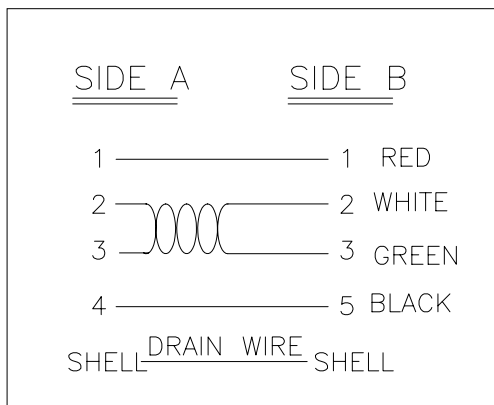

5	EZPVC50PR9011ZH	PVC MOLDING 50P BALCK 符合EN71 & EN1122 & EPA3050B	G	20
4	EF105200055391	CORE: 391 RH 10.5*20*5.5mm	EA	1
3	ECMSB05M0001	MINI USB 5P GOLD FLASH,COLOR:BLACK	EA	1
2	ECUSB04M0005	USB A TYPE :TERM:GOLD FLASH,SHELL:NI.PLATED COLOR:WHITE REV1.1	EA	1
1	EK2804BK350062	CABLE 2725 28AWG*1P(白,綠)+28AWG*2C(紅,黑)+AEB 65 % OD=3.5mm COLOR:BLACK REV1.1	MM	1480
NO	PART NO	DESCRIPTION	U'T	Q'TY

MATERIAL SPECIFICATION

2	USB	PBT	WHITE	
1	CABLE	AEB	BLACK	UL272#28
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK

SUYIN CONNECTOR				
CUSTOMER COPY	TITLE: USB A +CORE+MINI USB			
PART NO.	CBL30080-1500			
PART NO.(OLD)	_____			
DRAWING NO.	CBL30080-1500			
SCALE	2:1	UNIT	mm	A4

ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED	Angle	±2°	DRAW
	0		NEW				30 ~	±0.50	DESIGN
							10 ~ 30	±0.30	CHECK
							~ 10	±0.15	APPRO.