



**CHENMKO ENTERPRISE CO.,LTD**

**SURFACE MOUNT**

**SCHOTTKY BARRIER DIODE**  
**VOLTAGE 30 Volts CURRENT 0.3 Ampere**

*Lead free devices*

**CH402DPT**

**APPLICATION**

- \* High frequency rectification for switching power supply

**FEATURE**

- \* Small surface mounting type. (SOT-23)
- \* Low IR. (IR=10uA Typ.)
- \* High reliability


**CONSTRUCTION**

- \* Silicon epitaxial planar


**MARKING**

- \* 05K

**CIRCUIT**



**SOT-23**

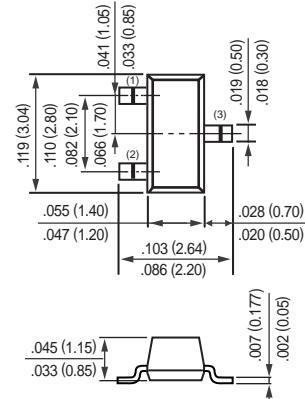

**SOT-23**

**MAXIMUM RATINGS ( At TA = 25°C unless otherwise noted )**

RATINGS	SYMBOL	CH402DPT	UNITS
Maximum Recurrent Peak Reverse Voltage	VR <sub>RM</sub>	30	Volts
Maximum RMS Voltage	V <sub>RMS</sub>	21	Volts
Maximum DC Blocking Voltage	V <sub>D</sub> C	30	Volts
Maximum Average Forward Rectified Current	I <sub>O</sub>	0.3	Amps
Peak Forward Surge Current at 8.3 mSec single half sine-wave	I <sub>FSM</sub>	3.0	Amps
Typical Junction Capacitance between Terminal (Note 1)	C <sub>J</sub>	40	pF
Maximum Operating Temperature Range	T <sub>J</sub>	+125	°C
Storage Temperature Range	T <sub>STG</sub>	-55 to +125	°C

**ELECTRICAL CHARACTERISTICS ( At TA = 25°C unless otherwise noted )**

CHARACTERISTICS	SYMBOL	CH402DPT	UNITS
Maximum Instantaneous Forward Voltage at I <sub>F</sub> = 0.3A	V <sub>F</sub>	0.50	Volts
Maximum Average Reverse Current at V <sub>R</sub> (1)= 30V	I <sub>R</sub> (1)	50	uAmps
Maximum Average Reverse Current at V <sub>R</sub> (2)= 10V	I <sub>R</sub> (2)	30	uAmps

NOTES : 1. Measured at 1.0 MHz and 0 reverse bias voltage.  
 2. ESD sensitive product handling required.

2002-3

## RATING CHARACTERISTIC CURVES ( CH402DPT )

FIG. 1 - FORWARD CHARACTERISTICS

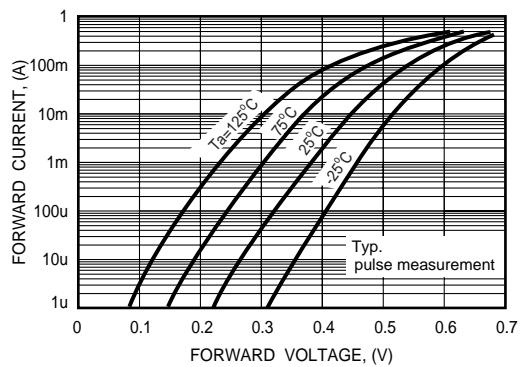


FIG. 2 - REVERSE CHARACTERISTICS

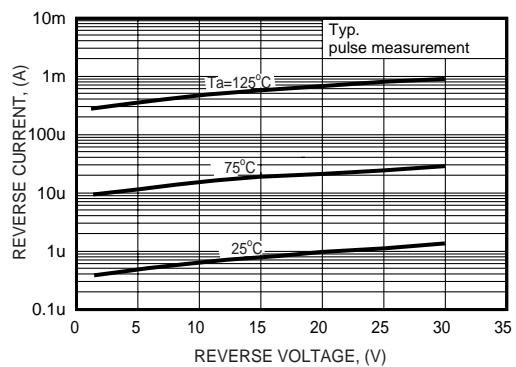


FIG. 3 - TYPICAL JUNCTION CAPACITANCE

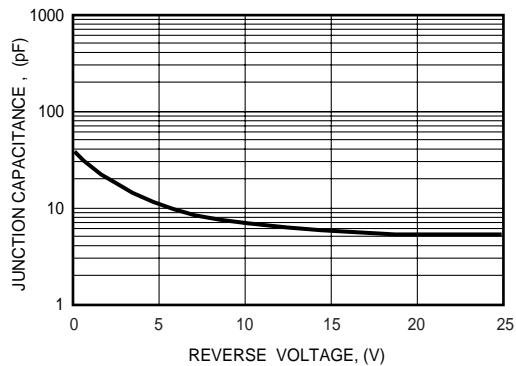


FIG. 4 - FORWARD POWER DISSIPATION CHARACTERISTICS

