



CHENMKO ENTERPRISE CO.,LTD

Lead free devices

**SURFACE MOUNT
PNP Digital Silicon Transistor**

VOLTAGE 50 Volts CURRENT 30 mAmpere

CHDTA124EKPT

APPLICATION

- * Switching circuit, Inverter, Interface circuit, Driver circuit.

FEATURE

- * Small surface mounting type. (SC-59/SOT-346)
- * High current gain.
- * Suitable for high packing density.
- * Low collector-emitter saturation.
- * High saturation current capability.
- * Internal isolated PNP transistors in one package.
- * Built in bias resistor($R_1=22\text{k}\Omega$, Typ.)


CONSTRUCTION

- * One PNP transistors and bias of thin-film resistors in one package.


MARKING

EK4

CIRCUIT



SC-59/SOT-346



Dimensions in millimeters

SC-59/SOT-346

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 60134).

| SYMBOL | PARAMETER | CONDITIONS | MIN. | MAX. | UNIT |
|----------------------|-------------------------|----------------------------------|------|------|------|
| V _{CC} | Supply voltage | | - | -50 | V |
| V _{IN} | Input voltage | | -40 | +10 | V |
| I _O | DC Output current | | - | -30 | mA |
| I _{C(MAX.)} | | | - | -100 | |
| P _{TOT} | Total power dissipation | T _{amb} ≤ 25 °C, Note 1 | - | 250 | mW |
| T _{TG} | Storage temperature | | -55 | +150 | °C |
| T _J | Junction temperature | | - | 150 | °C |
| R _{θJS} | Thermal resistance | junction - soldering point | - | 100 | °C/W |

Note

- Transistor mounted on an FR4 printed-circuit board.

RATING CHARACTERISTIC (CHDTA124EKPT)

CHARACTERISTICS

$T_{amb} = 25^{\circ}\text{C}$ unless otherwise specified.

| SYMBOL | PARAMETER | CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|--------------|----------------------|--|------|------|-------|------------------|
| $V_{I(off)}$ | Input off voltage | $I_o=-100\mu\text{A}; V_{cc}=-5.0\text{V}$ | -0.5 | — | — | V |
| $V_{I(on)}$ | Input on voltage | $I_o=-5\text{mA}; V_o=-0.2\text{V}$ | — | — | -3.0 | V |
| $V_{O(on)}$ | Output voltage | $I_o=-10\text{mA}; I_i=-0.5\text{mA}$ | — | -0.1 | -0.3 | V |
| I_i | Input current | $V_i=-5\text{V}$ | — | — | -0.36 | mA |
| $I_{C(off)}$ | Output current | $V_i=0\text{V}; V_{cc}=-50\text{V}$ | — | — | -0.5 | μA |
| h_{FE} | DC current gain | $I_o=-5\text{mA}; V_o=-5.0\text{V}$ | 56 | — | — | |
| R_1 | Input resistor | | 15.4 | 22.0 | 28.6 | $\text{k}\Omega$ |
| R_2/R_1 | Resistor ratio | | 0.8 | 1.0 | 1.2 | |
| f_T | Transition frequency | $I_c=-5\text{mA}, V_{CE}=-10.0\text{V}$ $f=100\text{MHz}$ | — | 250 | — | MHz |

Note

1. Pulse test: $t_p \leq 300\mu\text{s}$; $\delta \leq 0.02$.

RATING CHARACTERISTIC CURVES (CHDTA124EKPT)

Typical Electrical Characteristics

Fig.1 Input voltage vs. output current
(ON characteristics)

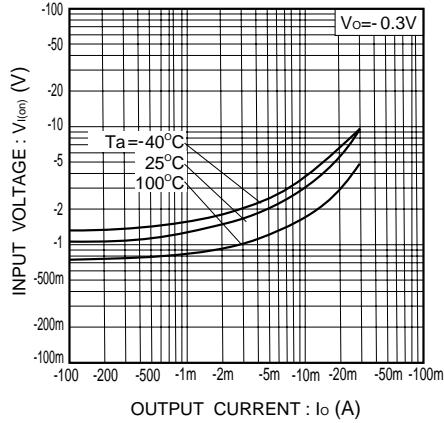


Fig.2 Output current vs. input voltage
(OFF characteristics)

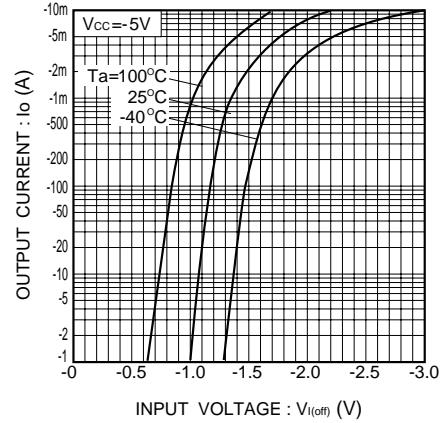


Fig.3 DC current gain vs. output current

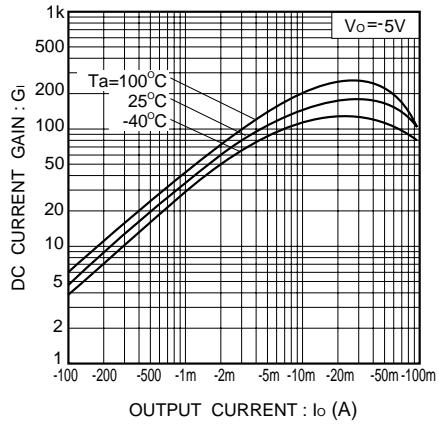


Fig.4 Output voltage vs. output current

