


**SURFACE MOUNT
HIGH EFFICIENCY SILICON RECTIFIER
VOLTAGE RANGE 50 to 100 Volts CURRENT 2.0 Amperes**

FEATURES

- * Ideal for surface mounted applications
- * Low leakage current
- * Metallurgically bonded construction
- * Mounting position: Any
- * Weight: 0.098 gram

MECHANICAL DATA

- * Epoxy : Device has UL flammability classification 94V-0

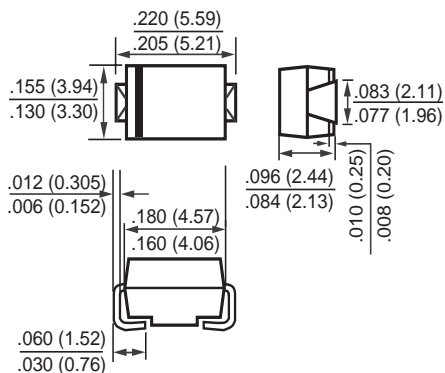

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

MAXIMUM RATINGS (At TA = 25°C unless otherwise noted)

RATINGS	SYMBOL	HFM201W	HFM202W	HFM203W	HFM204W	HFM205W	HFM206W	HFM207W	HFM208W	UNITS	
Maximum Recurrent Peak Reverse Voltage	VRRM	50	100	200	300	400	600	800	1000	Volts	
Maximum RMS Volts	VRMS	35	70	140	210	280	420	560	700	Volts	
Maximum DC Blocking Voltage	Vdc	50	100	200	300	400	600	800	1000	Volts	
Maximum Average Forward Current at TA = 50°C	Io	2.0								Amps	
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	IFSM	60								Amps	
Typical Junction Capacitance (Note 2)	Cj	30					20				pF
Operating and Storage Temperature Range	TJ, TSTG	-55 to + 150								°C	

ELECTRICAL CHARACTERISTICS (At TA = 25°C unless otherwise noted)


CHARACTERISTICS	SYMBOL	HFM201W	HFM202W	HFM203W	HFM204W	HFM205W	HFM206W	HFM207W	HFM208W	UNITS	
Maximum Forward Voltage at 2.0A DC	Vf	1.0			1.3		1.7			Volts	
Maximum Full Load Reverse Current, Full cycle Average TA = 55°C	Ir	50								uAmps	
Maximum DC Reverse Current at @ TA = 25°C		5.0								uAmps	
Rated DC Blocking Voltage @ TA = 125°C		100								uAmps	
Maximum Reverse Recovery Time (Note 1)	trr	50					75				nSec

NOTES : 1. Test Conditions: IF=0.5A, IR=-1.0A, IRR=-0.25A.


2. Measured at 1 MHz and applied reverse voltage of 4.0 volts.

RATING AND CHARACTERISTIC CURVES (HFM201W THRU HFM208W)

FIG. 1 - TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

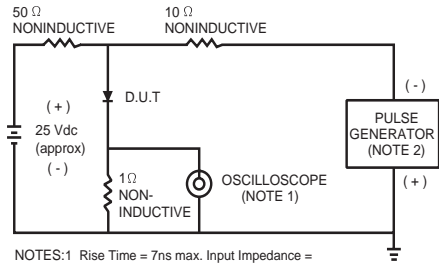


NOTES: 1. Rise Time = 7ns max. Input Impedance = 1 megohm, 22pF.
2. Rise Time = 10ns max. Source Impedance = 50 ohms.

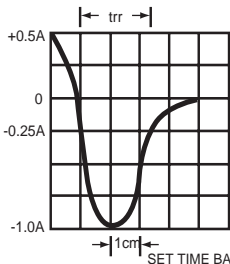

SET TIME BASE FOR 10/20 ns/cm

FIG. 2 - TYPICAL FORWARD CURRENT DERATING CURVE

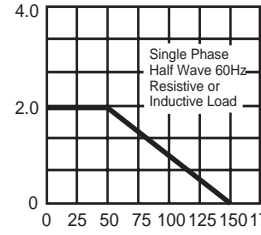

Single Phase Half Wave 60Hz Resistive or Inductive Load

FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

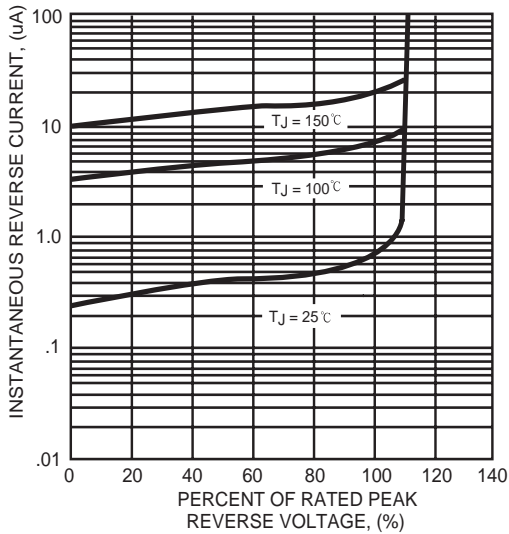


FIG. 4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

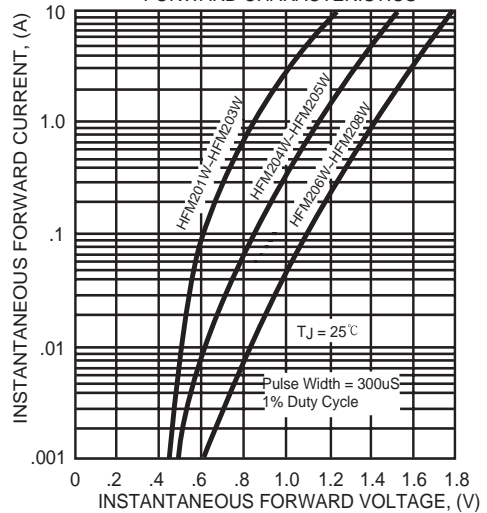


FIG. 5 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT



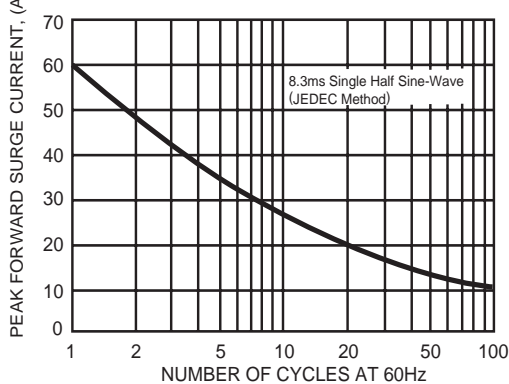


FIG. 6 - TYPICAL JUNCTION CAPACITANCE

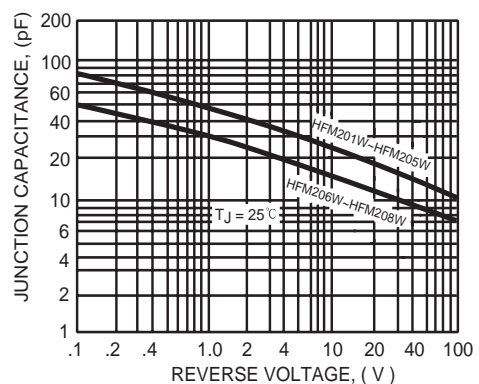

Mounting Pad Layout

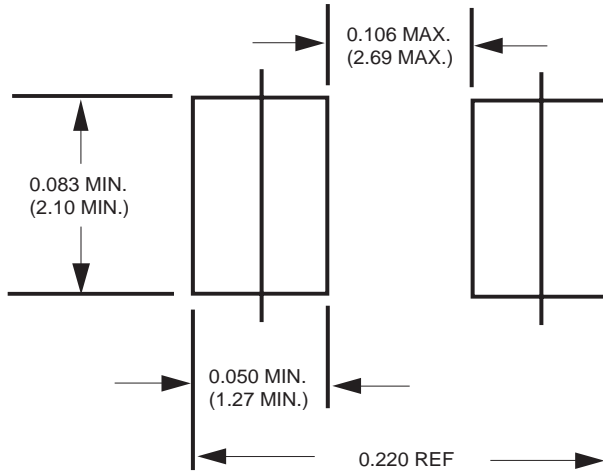

Dimensions in inches and (millimeters)