


**TERMINAL BLOCKS**

- 10mm Pitch 1-12 pole
- 1 and 2 Pole interlocking
- 1 pole in 10mm and 15mm length
- Moulded in UL94V-0 Flame retardant material
- 2.5mm<sup>2</sup> wire acceptance
- Screw terminal
- UL/VDE/CE approved


**SPECIFICATION**

**Rating:** 17.5A/380 Vac  
**Dielectric Strength:** >2.5KV  
**Insulation Resistance:** >5MΩ  
**Working temperature:** -20°C to 125°C  
**Moulding:** UL94V-0 flame retardant Lexan  
**Pin/terminal:** 5 micron tinned nickel plated brass

**Wire Protect:** Tin plated phosphor bronze  
**Screw/torque:** M3 steel/0.5Nm 7 micron zinc colour passivated and tropicalised  
**Recommended PCB hole size:** ø1.1mm

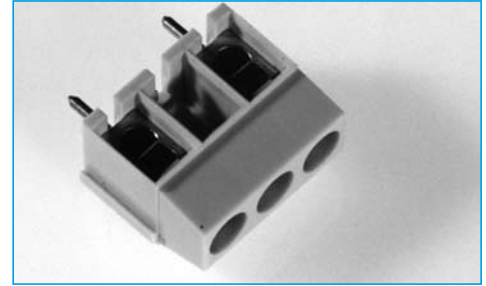

**OUTLINE DRAWING**

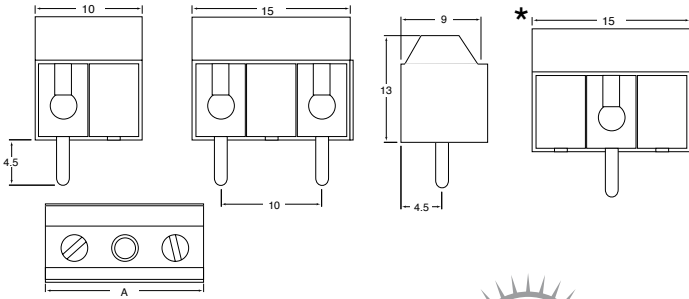

**ORDERING INFORMATION**

DBC	TB	11	/2	/2
Dubilier Connectors	Series Terminal Block	Style	Nº of Ways 2 = 2 ways 3 = 3 ways	Options Blank = STD *15 = 15mm Length on 1 way

\* Other Number of ways are available up to 24  
Please consult office for further details

**TERMINAL BLOCKS**



- 10mm pitch
- Flame retardant material
- Screw terminal
- 2.5mm<sup>2</sup> wire acceptance
- UL/CE/ VDE approved

**SPECIFICATION**


**Rating:** 17.5A/750V  
**Dielectric Strength:** ≥2.5KV/60sec  
**Insulation Resistance:** ≥5MΩ  
**Working temperature:** -20°C to 125°C  
**Moulding:** UL94V-0 flame retardant Lexan  
**Pin/terminal:** 5µ tinned, nickel plated brass  
**Wire protector:** Tin plated phosphor bronze

**Screw/torque:** M3 steel, 6 µ zinc colour passivated and tropicalised/0.5Nm  
**Recommended PCB hole size:** ø1.1mm

**10mm PITCH 90° MOUNT**



**OUTLINE DRAWING**

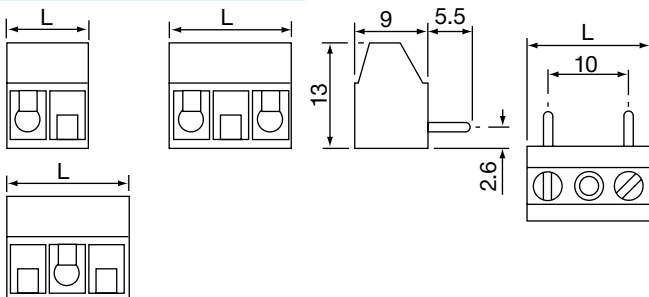

**ORDERING INFORMATION**

DBC	TB	48	/2
Dubilier Connectors	Series Terminal Block	Style	Nº of Ways 2 = 2 ways 3 = 3 ways