

JYC0348


Page 1 of 2



The 0348 series is designed to mount to pads on the lower side of a PCB with the LED viewed through a hole. This has the benefit of maintaining all parts of the LED below the surface of the PCB, making it especially suitable for use with membrane overlays and applications where a smooth front surface is desired.



RoHS Compliant
Aug 2004

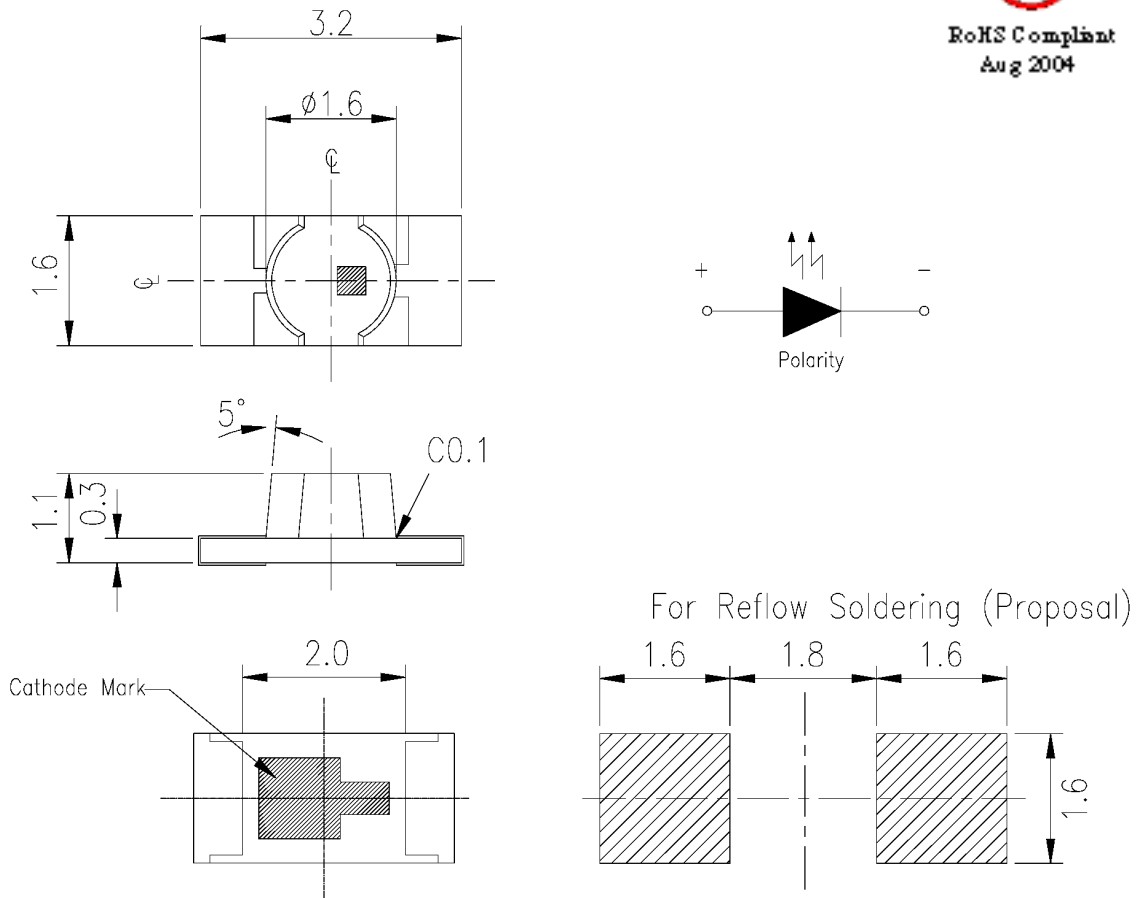

PART NO.	Chip		Lens Color
	Material	Emitted Color	
JYC0348	AlGaInP	Super Yellow	Water Clear

* Specifications subject to change without notice. Dimensions are in mm±0.1 unless stated otherwise.

IDEA, Inc., 1351 Titan Way, Brea, CA 92821 Ph:714-525-3302, 800-LED-IDEA; Fax: 714-525-3304 0507

Absolute Maximum Ratings at $T_a = 25\text{ }^\circ\text{C}$

Parameter	Symbol	Rating	Units
Forward Current	I_F	25	mA
Operating Temperature	T_{opr}	-40 to +85	$^\circ\text{C}$
Storage Temperature	T_{stg}	-40 to +90	$^\circ\text{C}$
Soldering Temperature	T_{sol}	260 (for 5 seconds)	$^\circ\text{C}$
Electrostatic Discharge	ESD	2000	V
Power Dissipation	P_d	120	mW
Peak Forward Current (Duty 1/10 @ 1KHz)	I_F (Peak)	200	mA
Reverse Voltage	V_R	5	V

Electronic Optical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Units	Condition
Luminous Intensity	I_V	60	90	—	mcd	$I_F = 20\text{ mA}$
Viewing Angle	$2\theta_{1/2}$	—	130	—	deg	$I_F = 20\text{ mA}$
Peak Wavelength	λ_p	—	591	—	nm	$I_F = 20\text{ mA}$
Dominant Wavelength	λ_d	—	589	—	nm	$I_F = 20\text{ mA}$
Spectrum Radiation Bandwidth	$\Delta\lambda$	—	15	—	nm	$I_F = 20\text{ mA}$
Forward Voltage	V_F	—	2.0	2.4	V	$I_F = 20\text{ mA}$
Reverse Current	I_R	—	—	10	μA	$V_R = 5\text{ V}$

* Specifications subject to change without notice. Dimensions are in $\text{mm}\pm 0.1$ unless stated otherwise.

IDEA, Inc., 1351 Titan Way, Brea, CA 92821 Ph:714-525-3302, 800-LED-IDEA; Fax: 714-525-3304 0507