


# SAW Resonator R43392



## Features

- 1-port Resonator
- Quartz Frequency Stabilization
- For transmitters or Local Oscillators

## Package Dimension – S3030

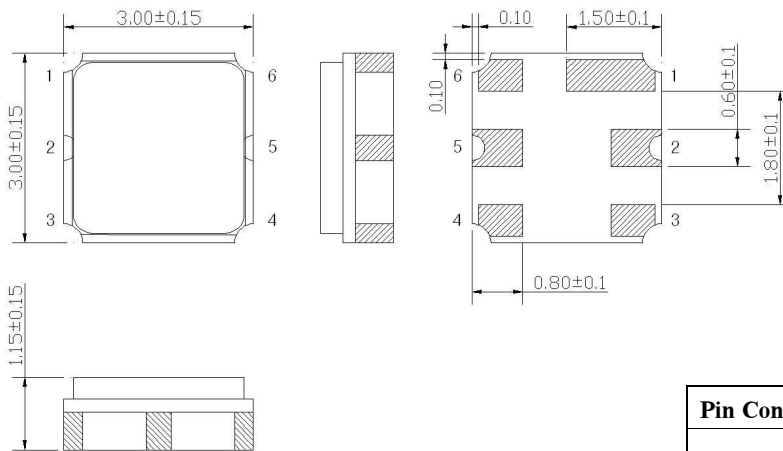

Pin Configuration	
2	Input
5	Output
1, 3, 4, 6	Ground

## Marking Configuration

ITF<sup>1)</sup>

4339<sup>2)</sup>

1) Manufacturer name

2) Marking Number

\* Ink or Laser Marking available

	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	R43392	
		Rev. Date	2004-09-14	
		Rev.	NS4101-AS01	1/5

# SAW Resonator R43392



## Maximum Ratings

Parameter	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-20	25	85
Storage Temperature Range	°C	-45	-	85
Power Handling Capability	dBm	-	0	-

Electrostatics Sensitive Device (ESD)

## Electrical Specification

$F_R = 433.920\text{MHz}$

Terminating source impedance :  $50\Omega$  and matching network

Terminating load impedance :  $50\Omega$  and matching network

		Minimum	Typical	Maximum
Resonance Frequency ( $F_R$ )	MHz	433.845	433.920	433.995
Insertion Loss	dB	-	1.5	2.5
50 ohm Loaded Q Unloaded Q			2,000 12,800	
Trun-over Temperature	°C	10	25	40
Temperature Coefficient of Frequency	ppm/°C <sup>2</sup>	-	-0.032	-

### Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature

	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	R43392	
		Rev. Date	2004-09-14	
		Rev.	NS4101-AS01	2/5

# SAW Resonator R43392




## Matching Schematic

( Actual matching values may vary due to PCB layout and parasitics )



## Frequency Response

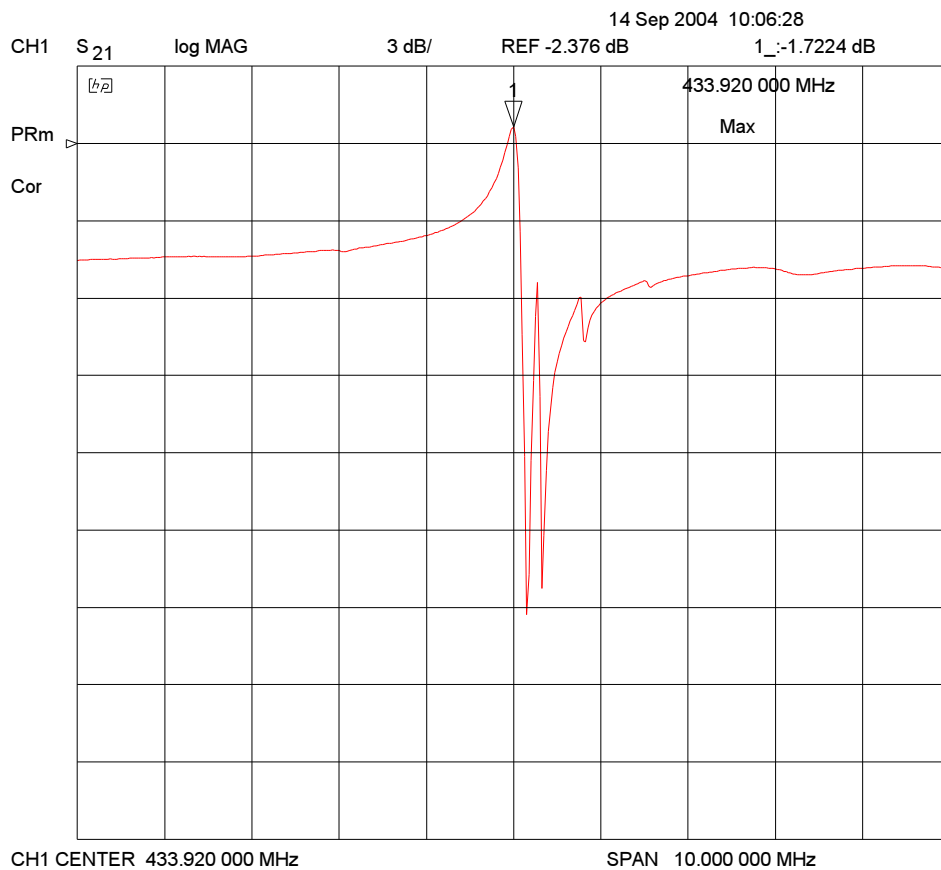


	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	R43392	
		Rev. Date	2004-09-14	
		Rev.	NS4101-AS01	3/5

# SAW Resonator R43392




## Packing Specification

1. Reeling Quantity : 1000 pcs / reel
2. Taping Structure : The tape shall be wound around the reel in the direction shown below.

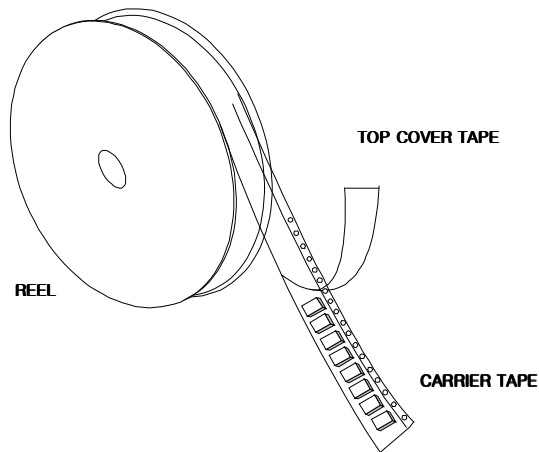

## Tape Specification

1. Leader part and vacant position specification

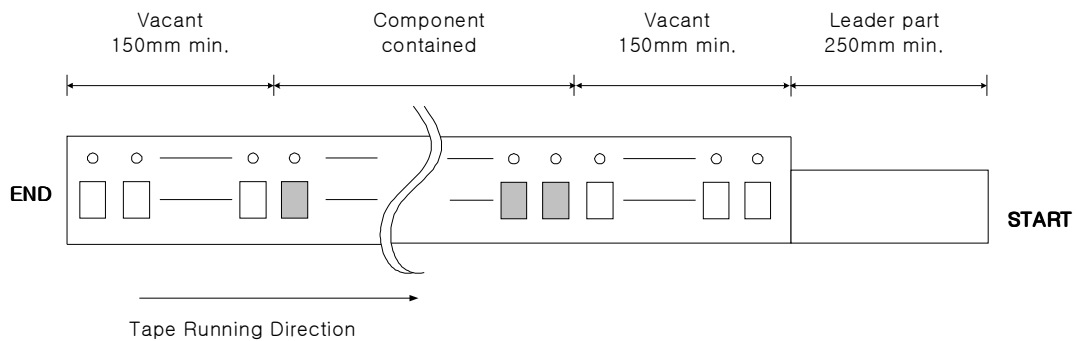


2. Tensile strength of carrier tape

4.4N/mm width

3. Top cover tape adhesion

- 1) pull off angle : 0~15°
- 2) speed : 300mm/min
- 3) force : 20~70g

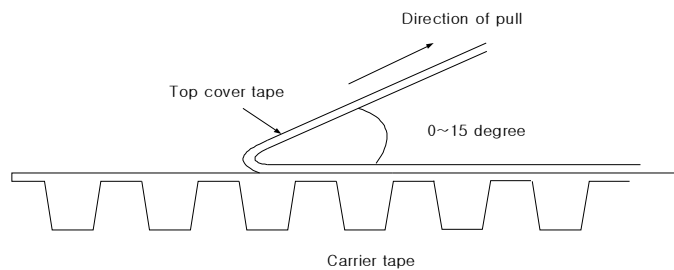


	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	R43392	
		Rev. Date	2004-09-14	
		Rev.	NS4101-AS01	4/5

# SAW Resonator R43392




## Carrier Tape Dimensions [unit : mm]

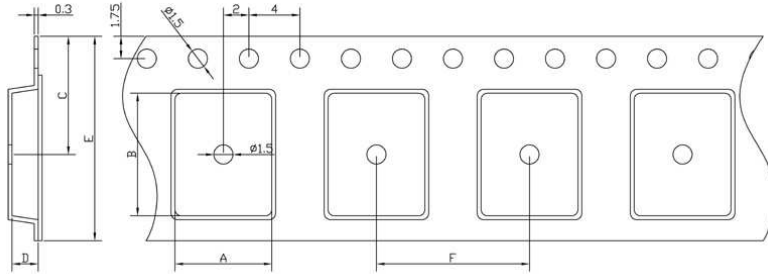


A	3.3 ± 0.1
B	3.3 ± 0.1
C	7.25 ± 0.1
D	1.25 ± 0.1
E	12.0 ± 0.1
F	4.0 ± 0.1

## Part Direction

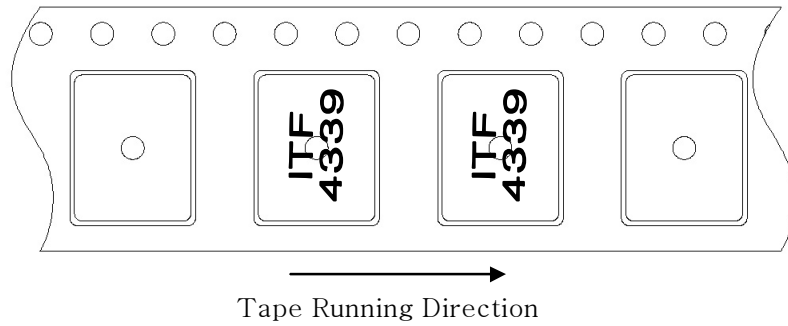

## Reel Dimensions [unit : mm]

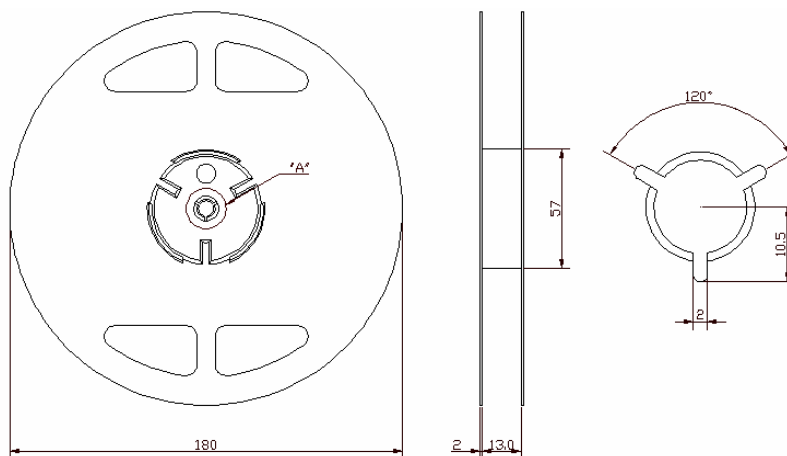

	<b>ITF Co., Ltd.</b> 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	R43392	
		Rev. Date	2004-09-14	
		Rev.	NS4101-AS01	5/5