

SP9926 Series

8.6 Watts Switching Power Supply

FEATURES

- Low Cost
- 90-264Vac Universal Input
- CISPR'B' & CNS'B' Compliance
- 100% Burn-In Test
- Over Voltage Protection Installation
- Short-Circuit Protection Installation
- Protection Type: Auto-Recovery




SPECIFICATION

Item	Model	SP9926
Input Voltage		AC 90~264V
Input Frequency		47~63Hz
Efficiency		70% Typical
Operating Temperature		0~50°C
Storage Temperature		-20~85°C
Weight		96g
Safety Description		UL, CUL, TUV


(*): Under Development (I/P): In Process

MECHANICAL

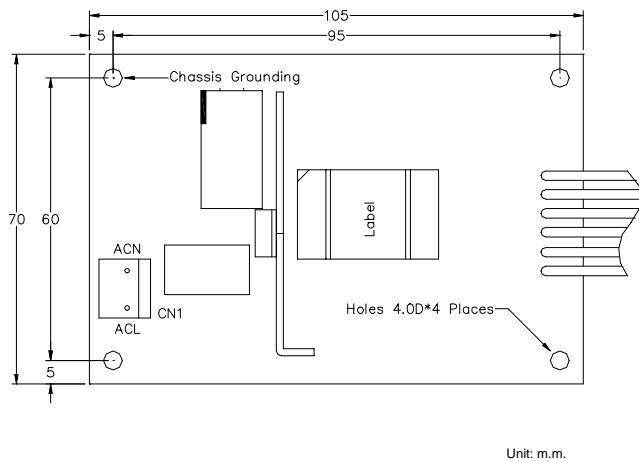

OUTPUTS

Model No.		SP9926		
Vo		Vo1	Vo2	Vo3
		+5V	+12V	-12V
Load	Min	0.1A	0.04A	0A
	Rated	1A	0.2A	0.1A
	Surge	---	---	---
Regulation	Line	1%	1%	1%
	Load	3%	5%	10%
Tolerance		+/-4%	+/-5%	+/-10%
Ripple & Noise		50mV	120mV	120mV

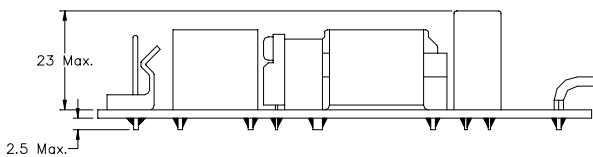

Ref. No.	Connector Type	Mating Connector Type
CN1	TKP P-88001 or Equivalent	TKP H8800 or Equivalent
Housing	TKP H8800 or Equivalent	TKP P-88001 or Equivalent

Bothhand USA. e-mail: sales@bothhandusa.com <http://www.bothhand.com>

462 Boston St - Topsfield, MA 01983 - Phone: 978-887-8050 - Fax: 978-887-5434