



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Product Specifications Approval Sheet

Product Description: SAW Filter 503.5 MHz SMD 3.8x3.8 mm

TST Part No.: TA1114A

Customer Part No.: _____

Customer signature required
Company: _____
Division: _____
Approved by : _____
Date: _____

Checked by: _____ David Chang 張閔智

Approved by: _____ Francis Chen (Signature)

Date: _____ 2009/10/16

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes.



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

SAW Filter 503.5 MHz

MODEL NO.:TA1114A

REV. NO.:1

A. MAXIMUM RATING:

1. Input Power Level: 10 dBm
2. DC Voltage : 5 V
3. Operating Temperature: -30°C to +60°C
4. Storage Temperature: -40°C to +85°C


RoHS Compliant
Lead free
Lead-free soldering

B. ELECTRICAL CHARACTERISTICS:


Item	Unit	Min.	Type.	Max.
Center frequency F_c	MHz	-	503.5	-
Insertion loss (495~512 MHz) IL	dB	-	2.4	3.2
Amplitude Ripple (495~512 MHz)	dB	-	0.9	2.4
Return loss (495~512 MHz)	dB	6	7.6	-
Attenuation (Reference level from 0 dB)				
0.3 ~ 300 MHz	dB	30	58	-
300 ~ 380 MHz	dB	24	55	-
380 ~ 473.5 MHz	dB	15	50	-
548.325 ~ 568.325 MHz	dB	12	52	-
568.825 ~ 579.65 MHz	dB	28	55	-
669.3 ~ 689.3 MHz	dB	24	51	-
689.3 ~ 1000 MHz	dB	26	43	-
Temperature Coefficient of Frequency	ppm/°C	-	-36	-

C. MEASUREMENT CIRCUIT:

HP Network analyzer

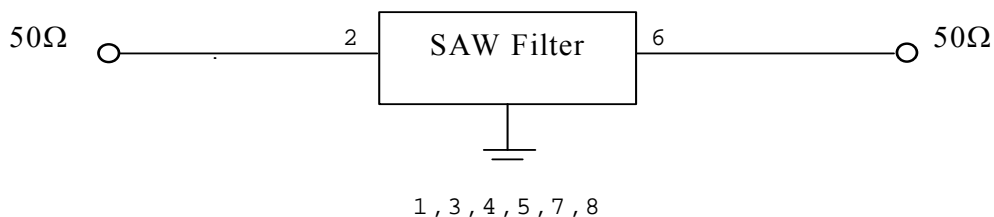

D.OUTLINE DRAWING:

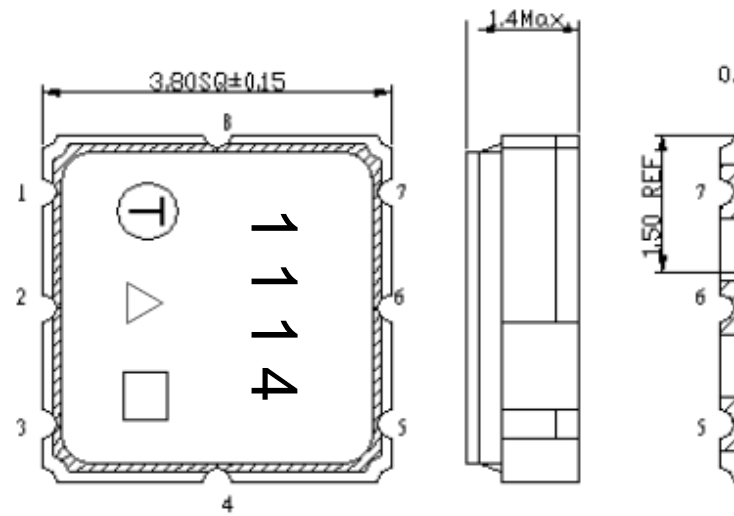


- 2 : Input
- 6: Output
- 1,3,4,5,7,8: Ground
- △ : Year Code
- : Date Code (W01->A, W02->B,...,W52->z)



△ Product Year Code

Year	2007	2008
	2009	2010
	2011	2012
	-	-
Product Code	A	a

E. PCB Footprint:

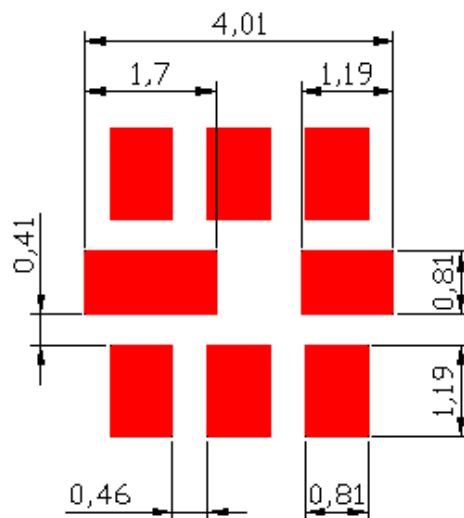


F. Frequency Characteristics :

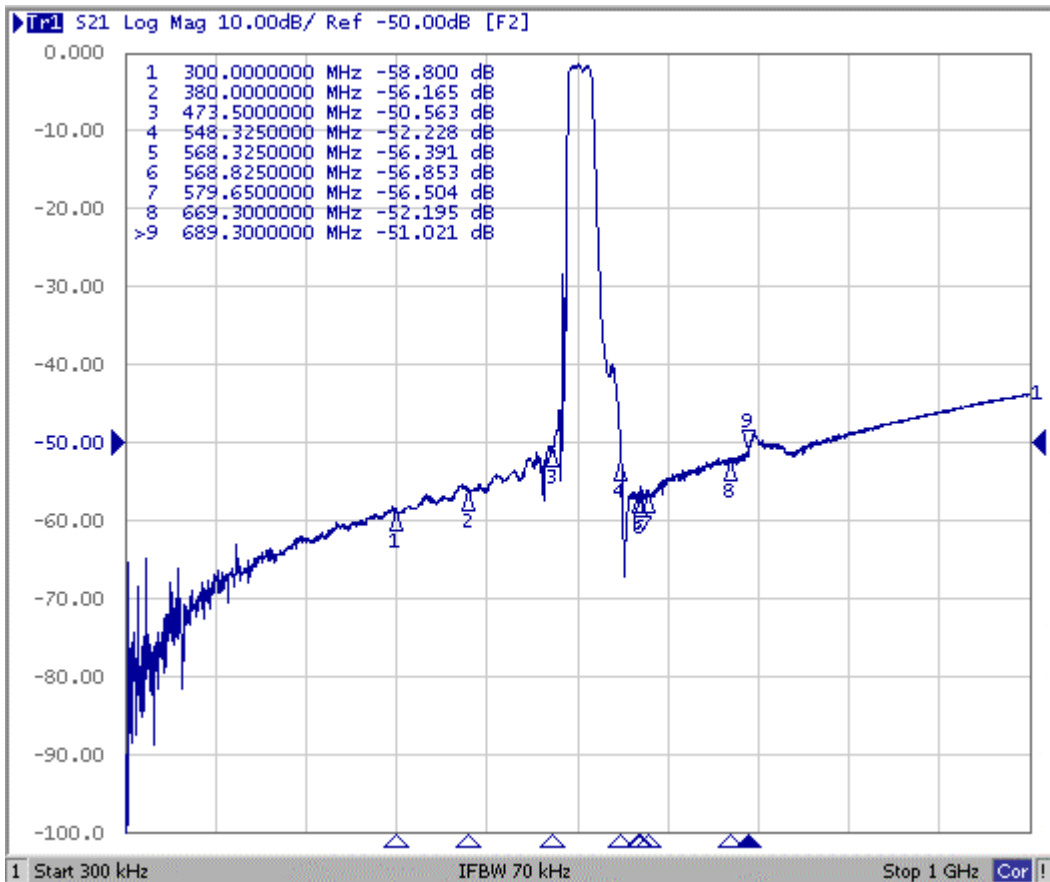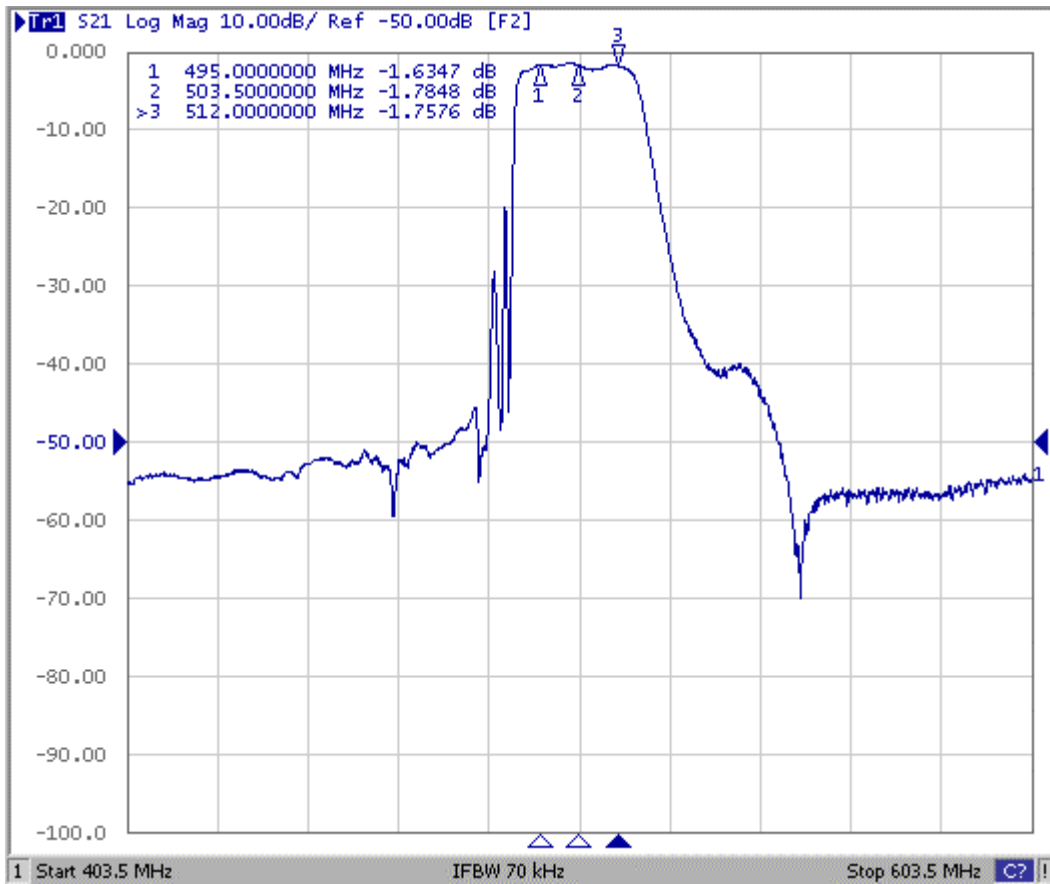


G. PACKING:

1. REEL DIMENSION

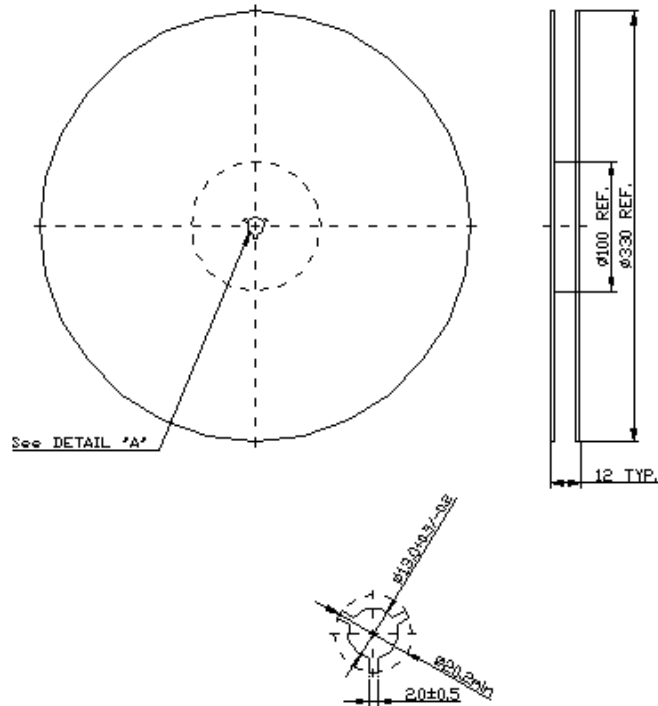

2. TAPE DIMENSION

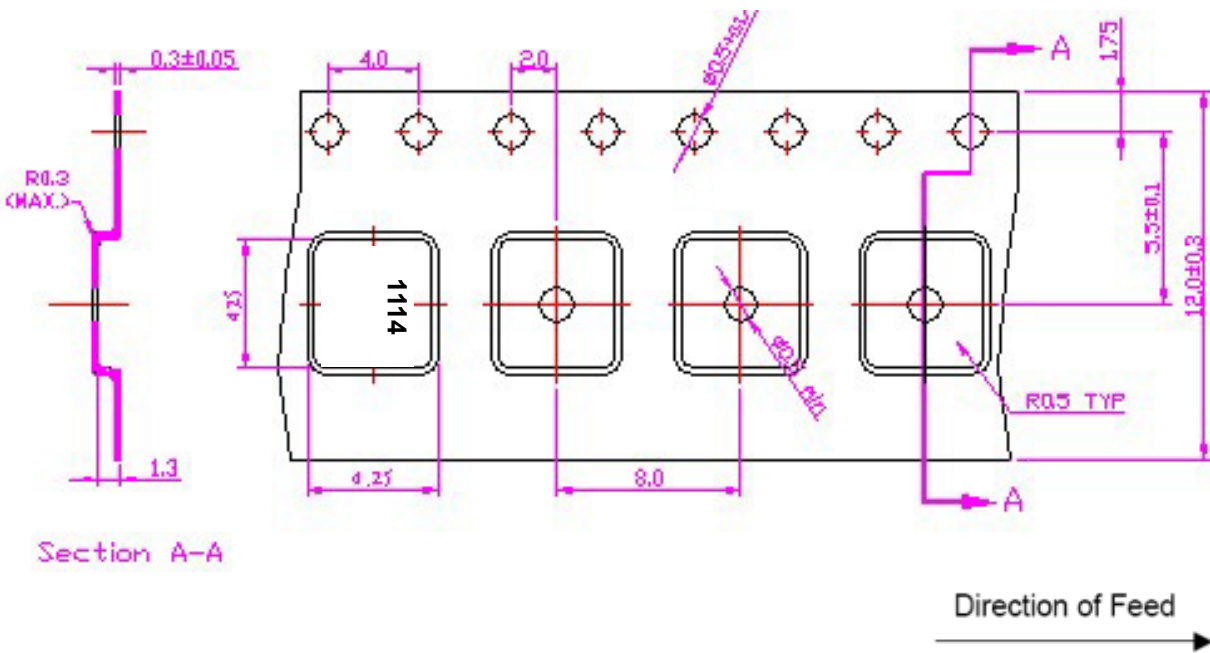

H. RECOMMENDED REFLOW PROFILE :

