



FREQUENCY STABILITY	
FREQUENCY STABILITY OVERALL INCLUDED LONG TERM AGING 15 YEARS: <math>< \pm 4.6 \text{ ppm}</math>	
HOLD-OVER STABILITY DURING 24 HOURS INCLUDING LOAD, SUPPLY VOLTAGE AND TEMPERATURE VARIATION: <math>< \pm 0.28 \text{ ppm}</math> (0.56 ppm p-to-p)	
POWER SUPPLY	
SUPPLY INPUT:	$V_{cc} = 5 \text{ V} \pm 0.2 \text{ V}^*$
INPUT CURRENT:	$< 70 \text{ mA} @ +30 \text{ }^\circ\text{C}^*$
INPUT CURRENT:	$< 110 \text{ mA} @ -20 \text{ }^\circ\text{C}^*$
FREQUENCY CONTROL RANGE	
CONTROL VOLTAGE:	Not applicable, pin 1 must be connected to ground (see note 2)
INTERNAL CALIBRATION:	$< \pm 1 \text{ ppm}^*$
OUTPUT	
OUTPUT SIGNAL:	HC-MOS compatible
SYMMETRY:	45 (min.) / 55 (max.) % @ $V_{cc} / 2^*$
RISE AND FALL TIME:	$t_r < 7 \text{ ns}$ $t_f < 7 \text{ ns}^*$
LEVEL „0“ AND „1“:	$< 0.4 \text{ V}$ $> V_{cc} - 0.5 \text{ V}$
FAN OUT (LOAD):	10 LS or 47pF max.
ENVIRONMENT	
OPERABLE TEMP. RANGE:	-40 to +85 °C
STORAGE TEMP. RANGE:	-65 to +125 °C
VIBRATION:	10 to 2000 Hz / 10 g
SHOCK:	2000 g, 0.3 ms, 1/2 sine
PACKAGE:	DIL 14, 4 pins, GND to case
PACKAGE HEIGHT:	8 mm (see packaging info)
WARM-UP	
$\Delta F/F$:	within spec after 30s @ 0 °C *
CURRENT:	$< 250 \text{ mA}$ during 10s
MISCELLANEOUS	
SHORT TERM STABILITY:	$< 5 \text{ E-10}$ 0.1 s to 30 s Typical 5 E-11 @ 1 s
PHASE NOISE (BW = 1Hz): (typical, @ 10MHz in static conditions)	1 Hz : -70 dBc / Hz 10 Hz : -100 dBc / Hz 100 Hz : -130 dBc / Hz 1 kHz : -140 dBc / Hz
* Customer's specification on request	

NOTE 1	
OCXOVST-D	
TEMP. RANGE *	0 to +70 °C
OCXOVST-C	
TEMP. RANGE *	-40 to +85 °C

NOTE 2	
On request:	
Possibility of frequency adjustment with control voltage.	

MARKING EXAMPLE			
		Type	Spec No.
OCXOVST-C		Frequency	Date Code
12.800 MHz	01.25	O (PIN 1)	Piece No.
O	12		

ORDERING INFORMATION EXAMPLE			
O C X O V S T - C 12.8 MHz x x x			
Oscillator Type	OCXO = Oven Controlled Crystal Oscillator	Oscillator output frequency	N° of customer spec.
Oscillator Version	V = low power voltage 5V ST = Stratum 3 application		
Temperature Range	C = -40 to +85 °C D = 0 to +70 °C		

STANDARD FREQUENCIES (MHz)				
12.8000	16.3840	19.4400	20.0000	40.0000

DATE:	June 2003	Revision No.: 2
-------	-----------	-----------------


In accordance with our policy of continuous development and improvement, we reserve the right to modify the design or the specifications of our products without prior notice.

Headquarters: Micro Crystal
Div. of ETA SA
Mühlestrasse 14
CH-2540 Grenchen
Switzerland


Tel. +41 32 655 82 82
Fax +41 32 655 80 90
Internet www.microcrystal.ch
Email sales@microcrystal.ch

Application and Test Circuit:

Adjustment with voltage

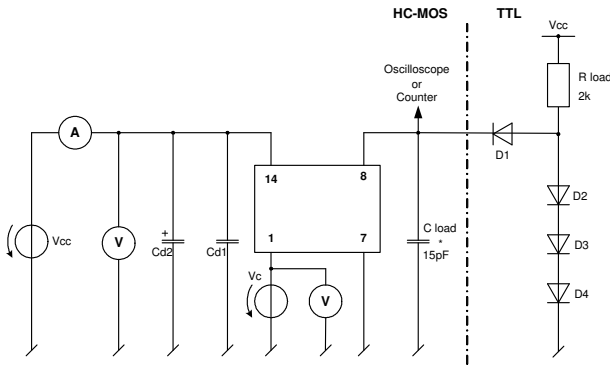


Adjustment with resistor

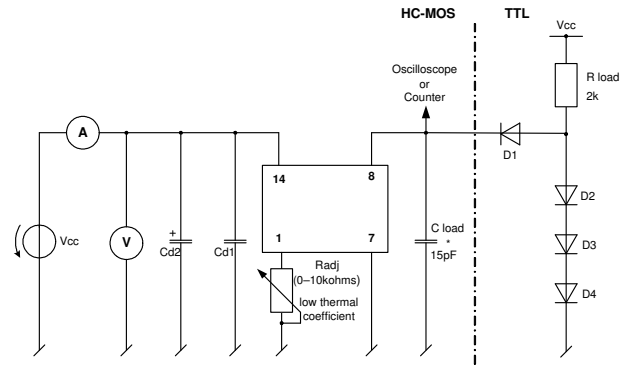


Waveform Output:

Waveshape TTL

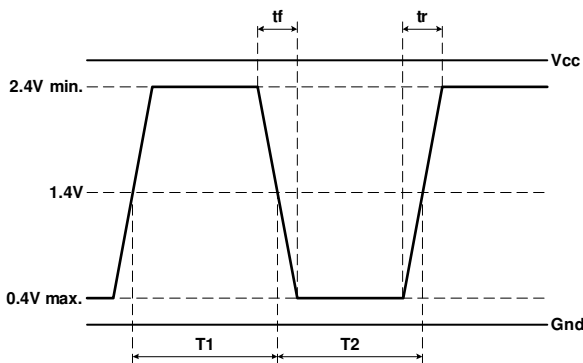

Waveshape HC-MOS

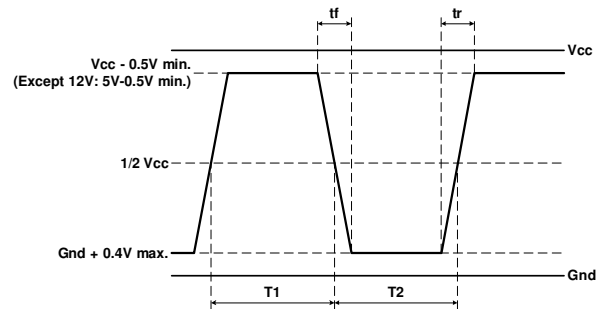

$$Duty\ Cycle = 100 \times \frac{T1}{T1 + T2} [\%]$$

DATE:	June 2003	Revision No.: 1
-------	-----------	-----------------

In accordance with our policy of continuous development and improvement, we reserve the right to modify the design or the specifications of our products without prior notice.

Headquarters: Micro Crystal
 Div. of ETA SA
 Mühlestrasse 14
 CH-2540 Grenchen
 Switzerland

Tel. +41 32 655 82 82
 Fax +41 32 655 80 90
 Internet www.microcrystal.ch
 Email sales@microcrystal.ch