



1. Mechanical Dimensions:

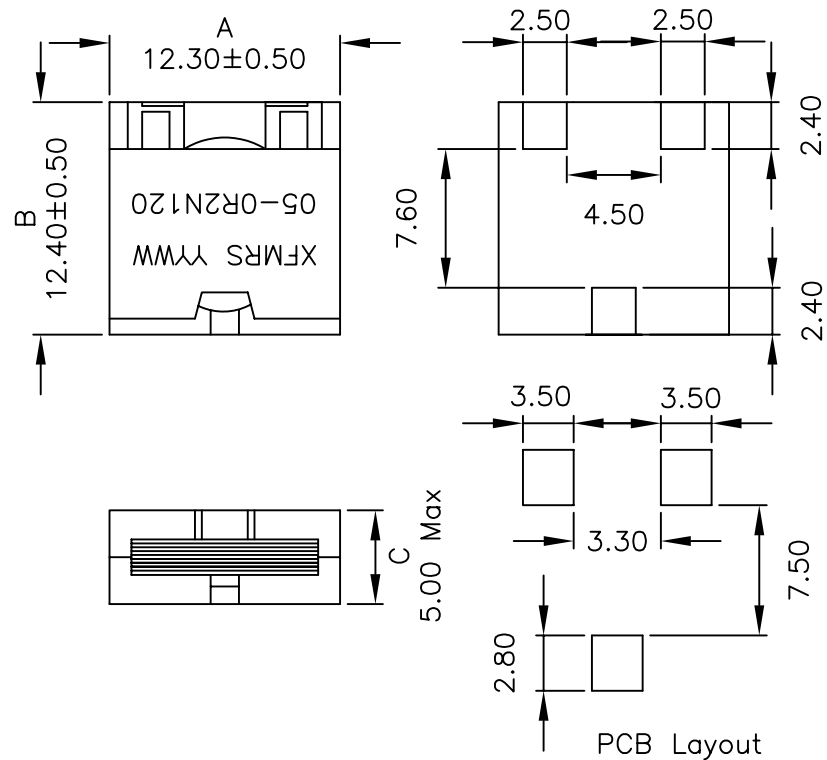

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Operating Temperature Range: 0°C to +70°C

2. Schematic:



3. Electrical Specifications: @25°C

OCL: $0.2\mu\text{H} \pm 30\%$ @100KHz 0.25V, 0Adc
 CURRENT: 12.0 Adc Max, OCL DROP BY 15% Max
 DC Res.: 2.00mOhms Max

DOC. REV: A/1

XFMR S Inc	Title: SM INDUCTOR		
	UNLESS OTHERWISE SPECIFIED	P/N: XF121205-0R2N120	REV. A
TOLERANCES: .xx ± 0.25	DWN.	李小锋	Oct-03-02
Dimensions in mm	CHK.	廖玉坤	Oct-03-02
SHEET 1 OF 1	APP.	Isaiah M	Oct-03-02