



1. Mechanical:

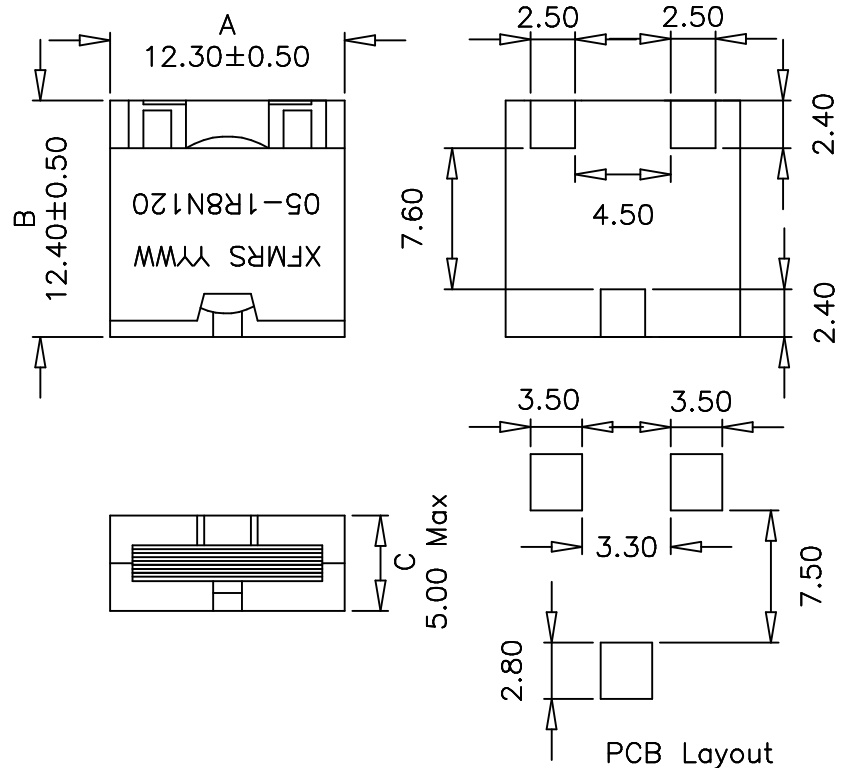

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Operating Temperature Range: 0°C to +70°C

2. Schematic:



3. ELECTRICAL SPECIFICATIONS: @25°C

OCL: 1.8uH±10% @100KHz, 0.25V, 0DC
 CURRENT: 12.0 ADC Max, OCL DROP BY 15% Max
 DC Res.: 6.60mOhms Typ

DOC. REV: A/2

XFMRS Inc	Title: INDUCTORS		
	UNLESS OTHERWISE SPECIFIED	P/N: XF121205-1R8N120	REV. A
TOLERANCES: .xx ±0.25	DWN.	李小锋	Dec-19-01
Dimensions in mm	CHK.	廖玉坤	Dec-19-01
SHEET 1 OF 1	APP.	Isaiah M	Dec-19-01