



**1. Mechanical:**

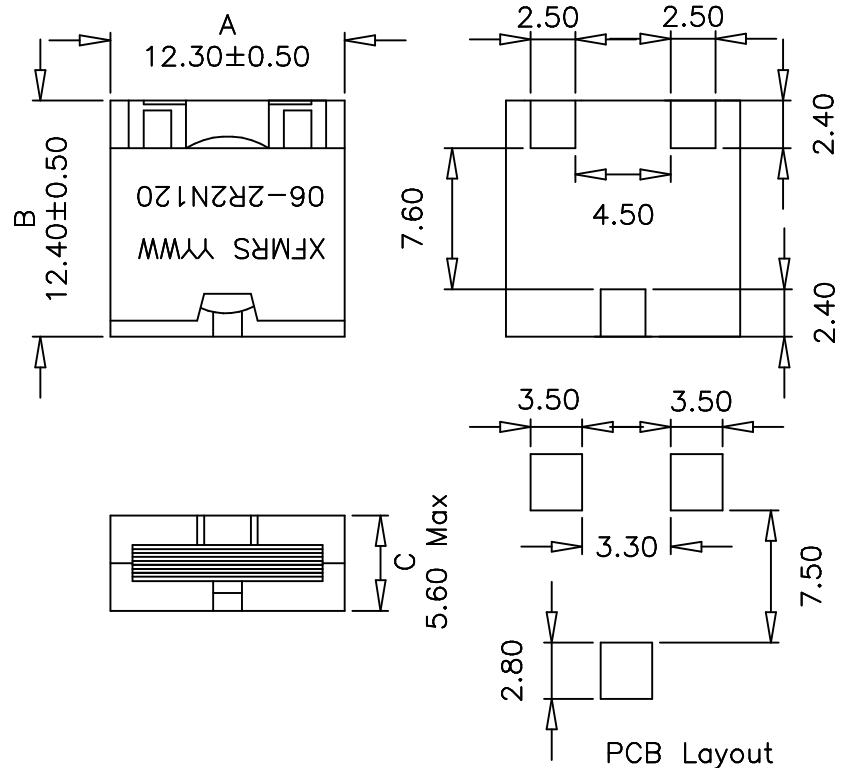

**Notes:**

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Operating Temperature Range: 0°C to +70°C

**2. Schematic:**



**3. ELECTRICAL SPECIFICATIONS: @25°C**

OCL:  $2.20\mu\text{H} \pm 10\%$  @100KHz, 0.25V, ODC  
 CURRENT: 12.0 ADC Max, OCL DROP BY 15% Max  
 DC Res.: 3.0mOhms Typ

DOC. REV A/3

<b>XFMRS Inc</b>	Title: <b>INDUCTORS</b>		
	UNLESS OTHERWISE SPECIFIED	P/N: XF121206-2R2N120	REV. A
TOLERANCES: .xx $\pm 0.25$	DWN.	李小锋	Dec-19-01
Dimensions in mm	CHK.	廖玉坤	Dec-19-01
SHEET 1 OF 1	APP.	Isaiah M	Dec-19-01