


## PNP Planar Epitaxial Transistor

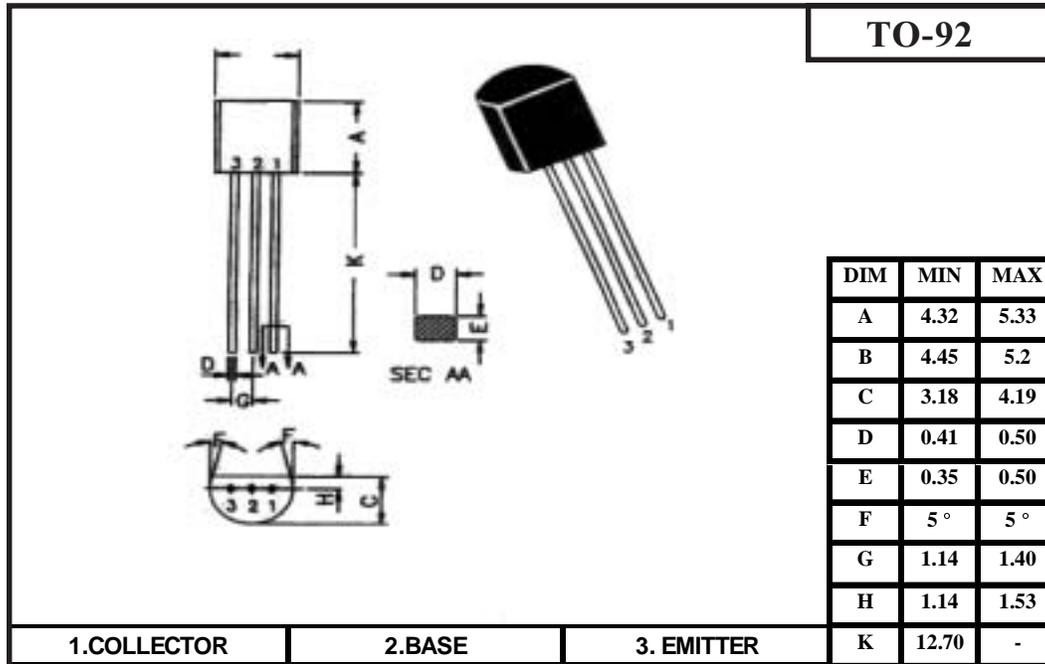

### Absolute Maximum Ratings (Ta=25°C)

	Symbol	-	Ratings	Unit
Collector-Emmitter Voltage	$V_{CEO}$	-	65	V
Collector-Emmitter Voltage	$V_{CES}$	-	80	V
Collector Base Voltage	$V_{CBO}$	-	80	V
Emitter Base Voltage	$V_{EBO}$	-	5	V
Collector current Continuous	$I_C$	-	100	mA
Peak	$I_{CM}$	-	200	mA
Base Current - Peak	$I_{BM}$	-	200	mA
Emitter Current - Peak	$I_{EM}$	-	200	mA
Collector Power Dissipation Ta = 25 °C	$P_{TA}$	-	500	mW
Operating and Storage Junction	$T_j$ $T_{stg}$	-	(-55 to +150)	°C
<b>THERMAL RESISTANCE</b>				
Junction to ambient	$R_{th(j-a)}$	-	250	°C / W

## Characteristics Ratings

(at  $T_a = 25^\circ\text{C}$  unless otherwise specified)

	Symbol	Test Conditions	min.	Typ.	max.	Unit
Collector Emitter Voltage	$V_{CE0}$	$I_C = 2\text{mA}, I_B = 0$	65	-	-	V
Collector Base voltage	$V_{CBO}$	$I_C = 100\mu\text{A}, I_E = 0$	80	-	-	V
Emitter Base Voltage	$V_{EBO}$	$I_E = 100\mu\text{A}, I_C = 0$	5	-	-	V
Collector Cut off Current	$I_{CBO}$	$V_{CB} = 30\text{V}, I_E = 0$ $V_{CB} = 30\text{V}, I_E = 0, T_J = 150^\circ\text{C}$	-	0.2 -	15 4	nA uA
Collector Cut off Current	$I_{CES}$	$V_{CE} = 80\text{V}$ $V_{CE} = 80\text{V}, T_J = 125^\circ\text{C}$	-	0.2 -	15 4	nA uA
DC Current Gain	$h_{FE}$	$V_{CE} = 5\text{V}, I_C = 2\text{mA}$	75		475	
Collector Emitter Saturation Voltage	$V_{CE(SAT)}$	$I_C = 10\text{mA}, I_B = 0.5\text{mA}$ $I_C = 100\text{mA}, I_B = 5\text{mA}$	-	0.09 0.25	0.3 0.65	V
Base Emitter Saturation Voltage	$V_{BE(SAT)}$	$I_C = 10\text{mA}, I_B = 0.5\text{mA}$ $I_C = 100\text{mA}, I_B = 5\text{mA}$	-	0.7 0.9	-	V
Base Emitter on Voltage	$V_{BE(SAT)}$	$I_C = 2\text{mA}, V_{CE} = 5\text{V}$ $I_C = 10\text{mA}, V_{CE} = 5\text{V}$	0.55 -	0.66 -	0.7 0.82	V

## Dynamics Characteristics

Transition Frequency	$f_T$	$I_C = 10\text{mA}, V_{CE} = 5\text{V}$ $f = 100\text{MHz}$	-	150	-	MHz
Collector Output Capacitance	$V_{CBO}$	$V_{CB} = 10\text{V}, f = 1\text{MHz}$	-	-	6	pF
Nose Figure	NF	$V_{CE} = 5\text{V}, I_C = 0.2\text{mA}$ $R_S = 2\text{k}\Omega, f = 1\text{KHz},$ $B = 200\text{ Hz}$	-	2	10	dB