

Digital Control Attenuator


P/N: JXWBSJ-T-2000-6000-45

Frequency Range(GHz)	2.0-6.0
Insertion Loss(dB)	3.5 max
Input/Output VSWR	2.0:1 max
Control Logic(Bits)	4 TTL
Step(dB)	3
Attenuation (dB)	45 max
Attenuation Accuracy(dB)	±1.5
Power Handling(W)	1 CW
Switching Speed(ns)	80
TTL Control	"0": On, "1": Attenuate
Power Supply(V/mA)	+5±5%/300 max, -5±5%/300 max
Connector	SMA-Female(Customization is available)
Operating Temperature(°C)	-55 ~ +85
Storage Temperature(°C)	-65 ~ +125
Case	39 x 21 x 11

Outline Drawing (Size: mm)

Control Pin

Pin	Attenuation
1	3dB
2	6dB
3	12dB
4	24dB

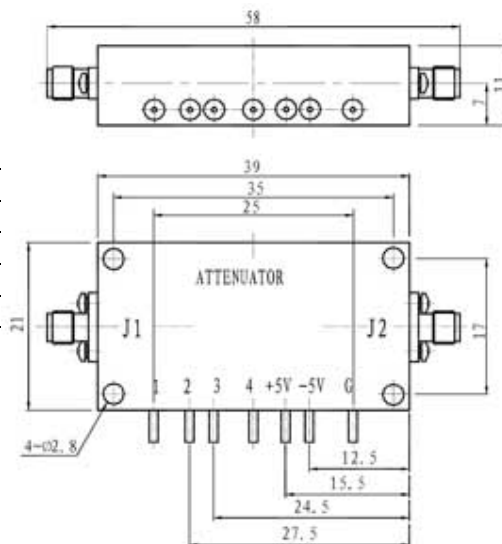

Data subject is to change without notice. For current data sheets, please contact: sales@aacix.com