

Specification

W900 . W901


All exposed cast aluminum components are made of non corrosive pure aluminum copper free (Aluminum is less than .1% copper content.#356 alloy.)

Finish: All polyester powder baked coatings preceded with a 5 baths preparation process. Meets military grade MIL-C781706 with a 2000 hours salt spray test.


- Pulse rated medium base porcelain socket.
- 75W/600V thermoplastic compact fluorescent socket.
- One-piece molded silicone gasket with memory retention.
- High power factor CWA ballast. Or 98% P.F.electronic smart ballast with end of life detection for compact fluorescent.
- All stainless steel hardware.
- All Moving and removable parts are sealed with a memory retention silicone gasket.

- 1- One piece cast aluminum wall mounting triangular box.
- 2- One piece cast aluminum triangular housing.
- 3- Aluminum specular multi facet reflector.
- 4- One piece sealed cast aluminum regressed lens frame.
- 5- Clear tempered sealed lens.

W901 Up light with additional flush mount clear tempered glass lens to minimize accumulation of debris.

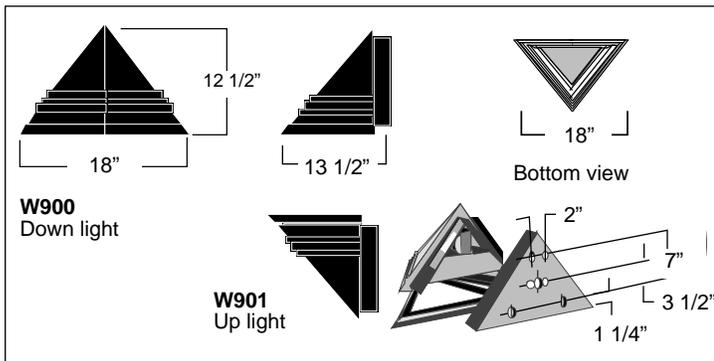

Photometry



Separate updated technical specification sheets with related models and light sources with I.E.S formatted photometry are available on www.luminis.com.

Cross view Plane view

Certification

UL. Wet Location. IP54

Mounting & E.P.A.

Max. weight: 30 lbs. E.P.A.: .8 sq./ft
 Installation: Mounts over a standard 4" octagonal box with 3 1/2" c/c mounting holes.
 Additional mounting holes are provided with wall plate.

For options details and specifications, please refer to page 41

Model#	Light source selection	Voltage	Finish	Options
<input type="checkbox"/> W900 <input type="checkbox"/> W901 	<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">MH (ED17)</div> <input type="checkbox"/> M70 <input type="checkbox"/> M100 <input type="checkbox"/> M150 <input type="checkbox"/> M175 <div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">HPS (ED17)</div> <input type="checkbox"/> H70 <input type="checkbox"/> H100 <input type="checkbox"/> H150 <div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">CF (Gx24q)</div> <div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Single lamp</div> <input type="checkbox"/> F132 <input type="checkbox"/> F142 <input type="checkbox"/> F157 <input type="checkbox"/> F170 (Lamps by others)	<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">120 V Standard factory prewired (If no voltage is specified) For other voltages, please specify with catalog number.</div> <div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">H.I.D.</div> <input type="checkbox"/> 208 V <input type="checkbox"/> 240 V <input type="checkbox"/> 277 V <input type="checkbox"/> 347 V <div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">COMP. FLUO.</div> <div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Smart ballast 120/277</div> <input type="checkbox"/> 347 V (To specify)	(Refer to color chart) <u>Standard selection</u> <input type="checkbox"/> WHT: Snow white <input type="checkbox"/> BKT: Jet black <input type="checkbox"/> BZT: Bronze <input type="checkbox"/> GRT: Titanium gray <input type="checkbox"/> DGT: Gun metal <input type="checkbox"/> CHT: Champagne <input type="checkbox"/> MST: Matte silver <input type="checkbox"/> GNT: Forest green <u>Optional colors</u> <input type="checkbox"/> CS: Custom color <input type="checkbox"/> RAL: RAL# color	<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Electrical</div> <input type="checkbox"/> EM42S: 1 lamp (26/32/42W) EM battery. <input type="checkbox"/> FS : Fuse <input type="checkbox"/> PH1: 120/277V photo cell <input type="checkbox"/> PH2: 347V photo cell

Luminaires may be altered for design improvements or discontinued without prior notice.