

Interconnection Cord with Plug "G-Horizontal", Straight



70 °C

**Description**

Interconnection Cord,
- Protection class II, Pin temperature 70 °C, Cable

Approvals

- CSA License Number: 32338

References

[General Product Information](#)

Weblinks



[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [Mating Connectors](#), [e-Store](#),
[Distributor-Stock-Check](#), [Accessories](#)

Technical Data

| | |
|---------------------------|--|
| Ratings IEC | 10 A / 250 VAC; 50 Hz |
| Ratings UL/CSA | 15 A / 250 VAC; 60 Hz |
| Dielectric Strength | > 2 kVDC between L-N > 2 kVAC between L/N-PE (1 min/50 Hz) |
| Allowable Operation Temp. | -25 °C to 70 °C |
| Degree of Protection | from front side IP 20 acc. to IEC 60529 |
| Protection Class | Suitable for appliances with protection class 2 acc. to IEC 61140 |
| Terminal | moulded |
| Material: Housing | PVC, black or grey |

Dimensions

28.3 mm

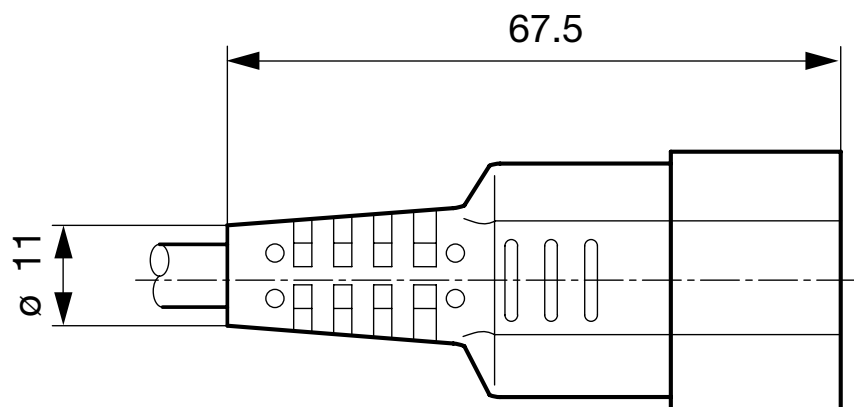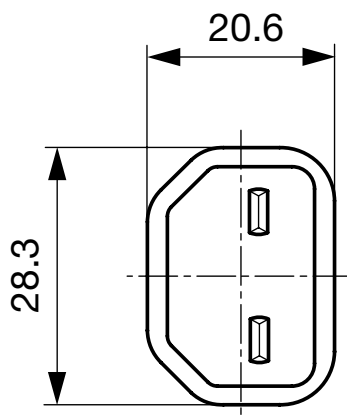

Config. Code

Product Configurator

409B - R - Type - D - Length

The characters are placeholders for the correspondingly keys of selections from the key tables.
Typ steht für die Dose bzw. 2. Seite, Länge ist die Leitungslänge in mm.

409B - R - Type - D - Length = cord type

| cord type | Configuration key |
|---------------------------------|-------------------|
| H03VV-F 2x0,75mm ² | A |
| H03VWH2-F 2x0,75mm ² | B |
| H05VV-F 2x0,75mm ² | D |
| H05VWH2-F 2x0,75mm ² | E |
| H05VV-F 2x1,0mm ² | F |
| SVT 2x18AWG | M |

Cord definition is detailed in general product information XXX

409B - R - Type - D - Length = Cord end 2

Cord end 2

zzzz, 0301, 3113

409B - R - Type - D - Length = Color

| Color | Configuration key |
|-----------------------|-------------------|
| jet black; RAL9005 | A |
| silver grey; RAL7001 | B |
| standard color: black | |

409B - R - Type - D - Length = Cord length

Cord length

zzzz, 000500, 001000, 001500, 002000, 002500, 003000, 005000

Cord length in mm