

Approvals



Life expectancy


L-10 LIFE AT 40°C:
25 000 hours

Brushless DC Motor

Electrical protection: impedance protected
Housing material: plastic UL 94 VO
Impeller material: plastic UL 94 VO
Weight: 230 g

Available with:

- speed sensor
- alarm

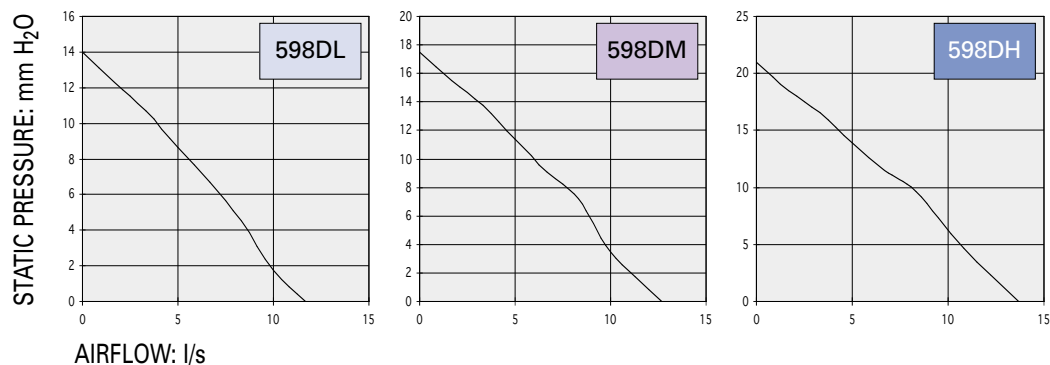

Part number	Nominal voltage	Airflow	Noise level	Nominal speed	Input power	Voltage range	Bearing system		Connection type		Operating temperature	
	V						I/s	dB(A)	RPM	W	V	Ball
598DL1LP11000	12	11,7	47	2100	4,80	(4-13,8)	X		X		- 10	60
598DL2LP11000	24	11,7	47	2100	5,76	(7-27,6)	X		X		- 10	60
598DM1LP11000	12	12,7	48,5	2300	6,96	(4-13,8)	X		X		- 10	60
598DM2LP11000	24	12,7	48,5	2300	6,72	(7-27,6)	X		X		- 10	60
598DH1LP11000	12	13,7	51	2500	9,84	(4-13,8)	X		X		- 10	60
598DH2LP11000	24	13,7	51	2500	8,40	(7-27,6)	X		X		- 10	60

Additional versions:

Higher speeds - 48 V versions (consult factory)

Accessories:

See page: 162