

**APPLIED  
CONCEPTS INC.**

397 Route 281 - P.O. BOX 453  
Tully, New York 13159-0453  
Phone: (315) 696-6676 Fax: (315) 696-9923  
www.acipower.com

**AC5-12-1361**

*PRODUCT DATA SHEET*

11/13/02

**CCFL INVERTER**  
*(For Multiple Tube Applications)*

The AC5-12-1361 is designed to power 6 CCFL's to a nominal power level of 24 watts.

Intensity control (0-100%) is accomplished by the user providing a variable dc level of 0V(off) to 5V(full-on) at pin 5 of CON1.

Enable control is accomplished at pin 3 of CON1 (0V=off, 5V=on).

All outputs are open and short circuit protected.

This unit replaces the AC5-12-1022

**Specifications:**

Vin = +12V +/- 10%

CCFL strike voltage = 1800Vrms @ Vin=12V

CCFL tube current = 6.0mA/tube @ 100% intensity/Vin=12V)

Recommended CCFL sustaining voltage = 550Vrms - 750Vrms

Nominal tube current frequency = 36khz +/- 10%

Nominal pwm frequency = 98Hz +/- 3%

Pwm duty cycle range = 0 to 100%

Average electrical efficiency >90%

External PWM signal input control via enable pin

Output PWM sync signal @ pin 6 of CON1


**Additional control capability:\***

Supports multiple units ie:Master/Slave(s)

Synchronization to display frame-rate

UL 1950 recognized (File No. E201813)

\* Please contact factory for information

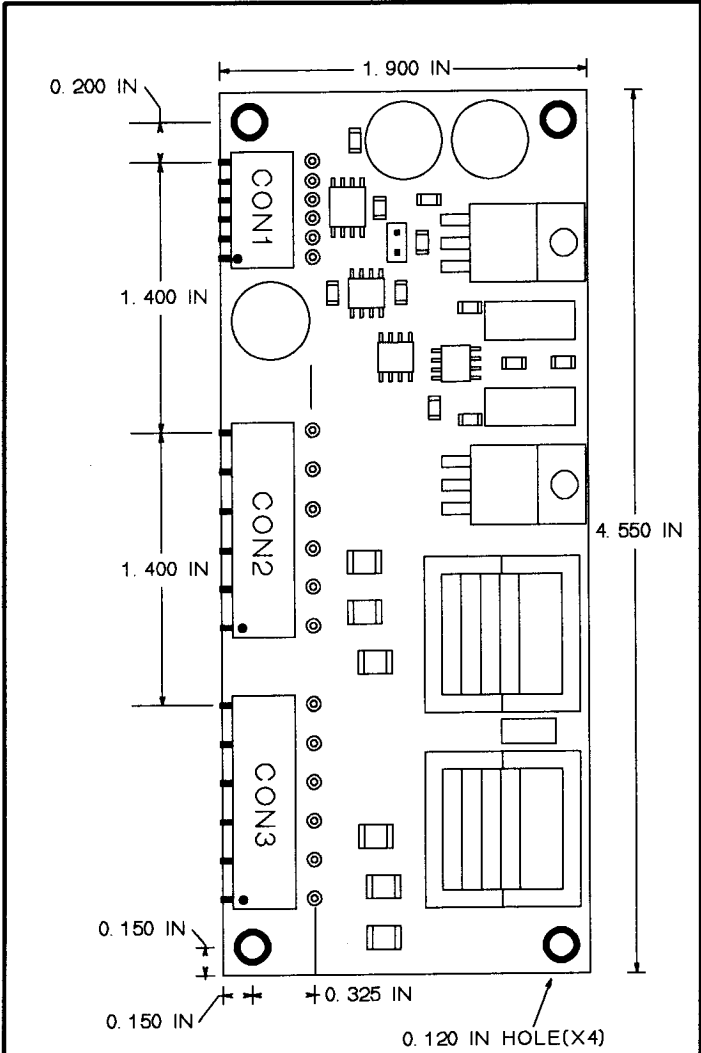

PROFILE = 0.575 IN

CON1 MOLEX 22-28-1063		CON2(CON3) MOLEX 22-28-1113	
PIN #		PIN #	
1	+12V	1	CCFL 3(6)
2	GND	2	NC
3	ENABLE	3	CCFL 2(5)
4	LOGIC HI	4	NC
5	VCNTL	5	CCFL 1(4)
6	PWM OUT	6	NC
		7	NC
		8	NC
		9	NC
		10	NC
		11	CCFL COMMON