

Caps to Holder FUL, FUP, FUA



500 VAC · 250VAC · 30A (UL/CSA)

**Description**

- Fits to type: FUA; FUL; FUP

Standards

- IEC 60127-6
- UL 512
- CSA C22.2 no. 39

Approvals

- VDE License Number: 40010391
- UL File Number: E39328

References

[General Product Information](#)

Weblinks



[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [Distributor-Stock-Check](#), [Accessories](#), [Product Change Notification \(PCN\)](#)

Technical Data

Fuse-Link	5 x 20 or 6,3 x 32 mm
Rated Voltage	500VAC (VDE), 250VAC (UL/CSA)
Rated Current	16A (VDE), 30A (UL/CSA)
Degree of Protection	IP 40
Admissible Ambient Air Temp.	-40 °C to 85 °C
Material: Cap	Thermoset
Storage Conditions	0 °C to 60 °C, max. 70% r.h.

Abmessungen

25.6 mm

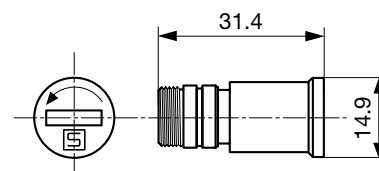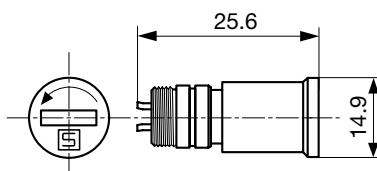

Variants

Cap	Fuse-Link	Degree of Protection	Order Number
Slot Knob	6.3 x 32mm	IP 40	0031.2321
Slot Knob	5 x 20mm	IP 40	0031.2323

Packaging Unit Plastic Bag (25 pcs.)

Caps to Holder FUL, FUP, FUA



500 VAC · 250 VAC · 30 A (UL/CSA)

**Description**

- Fits to type: FUA; FUL; FUP

Standards

- IEC 60127-6
- UL 512
- CSA C22.2 no. 39

Approvals

- VDE License Number: 40010391
- UL File Number: E39328

References

General Product Information

Weblinks



Approvals, RoHS, CHINA-RoHS, e-Store, SCHURTER-Stock-Check, Distributor-Stock-Check

Technical Data

Fuse-Link	5 x 20 or 6.3 x 32 mm
Rated Voltage	500 VAC (VDE), 250 VAC (UL/CSA)
Rated Current	16 A (VDE), 30 A (UL/CSA)
Degree of Protection	IP 40
Admissible Ambient Air Temp.	-40 °C to 85 °C
Material: Cap	Thermoset
Storage Conditions	0 °C to 60 °C, max. 70% r.h.

Dimensions

Length 25.6 mm

**Variants**

Cap	Fuse-Link	Degree of Protection	Order Number
Slot Knob	6.3 x 32 mm	IP 40	0031.2321
Slot Knob	5 x 20 mm	IP 40	0031.2323

Distributor-Stock-Check | SCHURTER-Stock-Check | e-Store

Packaging Unit

Plastic Bag (25 pcs.)

The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments.

The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments.