



Micro Commercial Components

Micro Commercial Components
 20736 Marilla Street Chatsworth
 CA 91311
 Phone: (818) 701-4933
 Fax: (818) 701-4939

MMST2222A

NPN Plastic-Encapsulate Transistors

Features

- Power Dissipation: 0.2W
- Ultra-small surface mount package
- Marking: K3P
- Case Material: Molded Plastic. UL Flammability Classification Rating 94-0 and MSL Rating 1

Maximum Ratings

Symbol	Rating	Rating	Unit
V_{CEO}	Collector-Emitter Voltage	40	V
V_{CBO}	Collector-Base Voltage	75	V
V_{EBO}	Emitter-Base Voltage	6.0	V
I_{CBO}	Collector Cut-off Current ($V_{CB}=70V, I_E=0$)	100	mA
I_{CEO}	Collector Cut-off Current ($V_{CE}=35V, I_B=0$)	100	mA
I_{EBO}	Emitter Cut-off Current ($V_{EB}=3V, I_C=0$)	100	mA
P_C	Power dissipation ⁽¹⁾	200	mW
T_J	Junction Temperature	-55 to +150	°C
T_{STG}	Storage Temperature	-55 to +150	°C

Electrical Characteristics @ 25°C Unless Otherwise Specified


Symbol	Parameter	Min	Max	Units
--------	-----------	-----	-----	-------

OFF CHARACTERISTICS ⁽²⁾

$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage ($I_C=1.0mA, I_B=0$)	40	---	Vdc
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage ($I_C=10mA, I_E=0$)	75	---	Vdc
$V_{(BR)EBO}$	Collector-Emitter Breakdown Voltage ($I_E=10uA, I_C=0$)	6.0	---	Vdc


ON CHARACTERISTICS ⁽²⁾

h_{FE}	DC Current Gain ($I_C=150mA, V_{CE}=10Vdc$) ($I_C=1.0mA, V_{CE}=10Vdc$)	100 50	300 ---	---
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage ($I_C=500mA, I_B=50mA$)	---	0.6	Vdc
$V_{BE(sat)}$	Base-Emitter Saturation Voltage ($I_C=500mA, I_B=50mA$)	---	1.2	Vdc
f_T	Transition Frequency ($V_{CE}=20V, I_C=20mA, f=100MHz$)	300	---	Hz
C_{ob}	Output Capacitance ($V_{CB}=10V, I_E=0mA, f=1MHz$)	---	8	pF
t_d	Delay Time ($V_{CC}=30V, I_{oc}=150mA, V_{BE(off)}=0.5V, I_{B1}=15mA$)	---	10	ns
t_r	Rise Time ($V_{CC}=30V, I_{oc}=150mA, V_{BE(off)}=0.5V, I_{B1}=15mA$)	---	25	ns
t_s	Storage Time ($V_{CC}=30V, I_{oc}=150mA, I_{B1}=I_{B2}=15mA$)	---	225	ns
t_f	Fall Time ($V_{CC}=30V, I_{oc}=150mA, I_{B1}=I_{B2}=15mA$)	---	60	ns

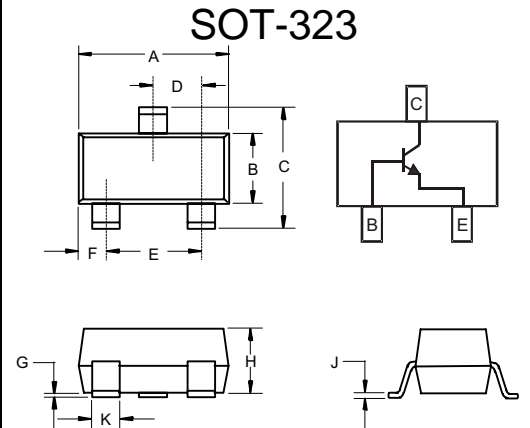

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.071	.087	1.80	2.20	
B	.045	.053	1.15	1.35	
C	.079	.087	2.00	2.20	
D	.026 Nominal		0.65Nominal		
E	.047	.055	1.20	1.40	
F	.012	.016	.30	.40	
G	.000	.004	.000	.100	
H	.035	.039	.90	1.00	
J	.004	.010	.100	.250	
K	.012	.016	.30	.40	

Suggested Solder Pad Layout





Micro Commercial Components

Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel;3Kpcs/Reel

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp . reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes .
Micro Commercial Components Corp . does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp* . and all the companies whose products are represented on our website, harmless against all damages.

*****APPLICATIONS DISCLAIMER*****

Products offer by *Micro Commercial Components Corp* . are not intended for use in Medical, Aerospace or Military Applications.