

**ULTRA FAST
GLASS PASSIVATED RECTIFIERS**

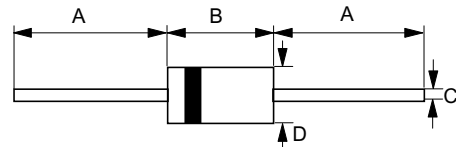
REVERSE VOLTAGE - **50 to 1000** Volts
FORWARD CURRENT - **3.0** Amperes

FEATURES

- Glass passivated chip
- Ultra fast switching for high efficiency
- Low reverse leakage current
- Low forward voltage drop
- High current capability
- Easily cleaned with Freon, Alcohol, Chlorothene and similar solvents
- Plastic material has UL flammability classification 94V-0

MECHANICAL DATA

- Case : JEDEC DO-201AD molded plastic
- Polarity : Color band denotes cathode
- Weight : 0.04 ounces, 1.2 grams
- Mounting position : Any

DO-201AD

DO-201AD		
Dim.	Min.	Max.
A	25.4	-
B	7.20	9.50
C	1.20	1.30
D	4.80	5.30
All Dimensions in millimeter		

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	UF3001G	UF3002G	UF3003G	UF3004G	UF3005G	UF3006G	UF3007G	UNIT
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @T _A =55°C	I _(AV)	3.0							A
Peak Forward Surge Current 8.3ms single half sine-wave super imposed on rated load(JEDEC Method)	I _{FSM}	125							A
Maximum forward Voltage at 3.0A DC	V _F	1.0			1.3	1.7			V
Maximum DC Reverse Current at Rated DC Blocking Voltage @T _J =25°C @T _J =100°C	I _R	5 100							uA
Maximum Reverse Recovery Time (Note 1)	T _{RR}	50				75			ns
Typical Junction Capacitance (Note 2)	C _J	30				15			pF
Typical Thermal Resistance (Note 3)	R _{θJA}	25							°C/W
Storage / Operatiing Temperature Range	T _{STG} ,T _J	-55 to +150							°C

NOTES : 1. Test condition of T_{RR}: I_F=0.5A, I_R=1.0A, I_{RR}=0.25A..
2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.
3. Thermal Resistance Junction to Ambient.

RATING AND CHARACTERISTIC CURVES

