



Shielded Power Inductor

For NSC LM315x
SIMPLE SWITCHER®



Part number ¹	Inductance ² ±20% (µH)	DCR ±8% (mOhm)	SRF typ ³ (MHz)	Isat ⁴ (A)	I _{rms} ⁵ (A)
HA3778-AL_	1.65	2.53	55	17	20

1. When ordering, please specify **termination** and **packaging** codes:

HA3778-AL C

- Termination:** L = RoHS compliant tin-silver over copper.
Special order: T = RoHS tin-silver-copper (95.5/4/0.5) or S = non-RoHS tin-lead (63/37).
- Packaging:** C = 7" machine-ready reel. EIA-481 embossed plastic tape (100 parts per full reel).
 B = Less than full reel. In tape, but not machine ready. To have a leader and trailer added (\$25 charge), use code letter C instead.
 D = 13" machine-ready reel. EIA-481 embossed plastic tape. Factory order only, not stocked (500 parts per full reel).

2. Inductance measured at 500 kHz, 0.1 Vrms, 0 Adc using a Coilcraft SMD-A fixture in an Agilent/HP 4284A LCR meter or equivalent.
 3. SRF measured on an Agilent/HP 8753ES.
 4. DC current at which the inductance drops 30% (typ) from its value without current.
 5. Current that causes a 40°C temperature rise from 25°C ambient.
 6. Electrical specifications at 25°C.
 Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

- Designed specifically for National Semiconductor LM315x SIMPLE SWITCHER® Controllers for applications with output current up to 12 A.
- L1 on NSC Demonstration Board LM3152-3.3
- Soft saturation makes it ideal for use in multi-phase VRM/VRD regulators and high current/high frequency DC/DC converters.
- Flat wire construction for low DCR
- The materials used eliminate all thermal aging issues

Core material Powdered iron

Terminations RoHS compliant tin-silver over copper. Other terminations available at additional cost.

Weight 3.44 g

Ambient temperature -40°C to +85°C with I_{rms} current, +85°C to +125°C with derated current

Storage temperature Component: -40°C to +125°C.
 Packaging: -40°C to +80°C


Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Mean Time Between Failures (MTBF) 26,315,789 hours

Packaging 100/7" reel; 500/13" reel Plastic tape: 24 mm wide, 0.4 mm thick, 16 mm pocket spacing, 7.5 mm pocket depth

PCB washing Only pure water or alcohol recommended

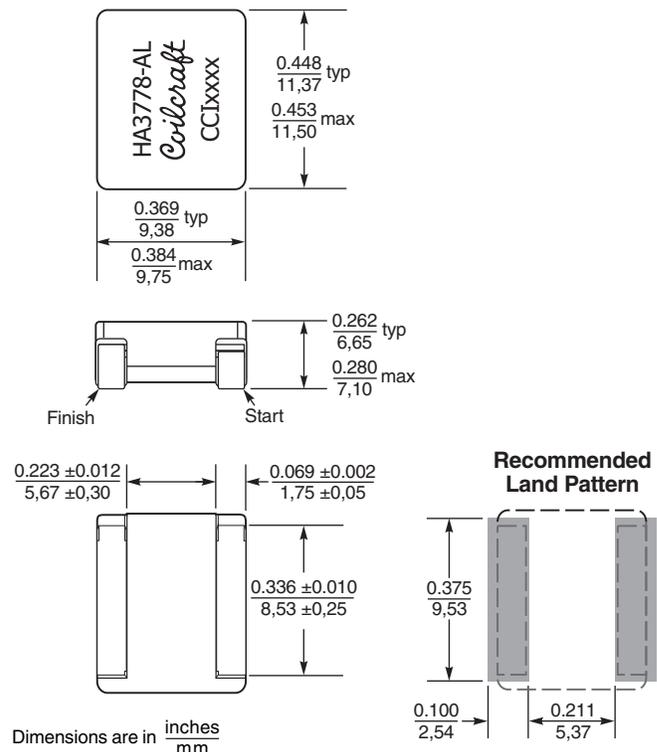

Coilcraft®

Specifications subject to change without notice.
 Please check our website for latest information.

Document 684-1 Revised 10/16/08


1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469

E-mail info@coilcraft.com Web <http://www.coilcraft.com>




Shielded Power Inductor – HA3778-AL


Inductance vs Current

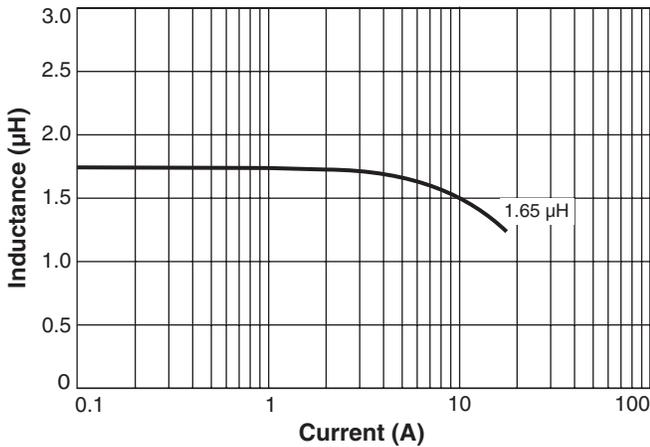


Inductance vs Frequency

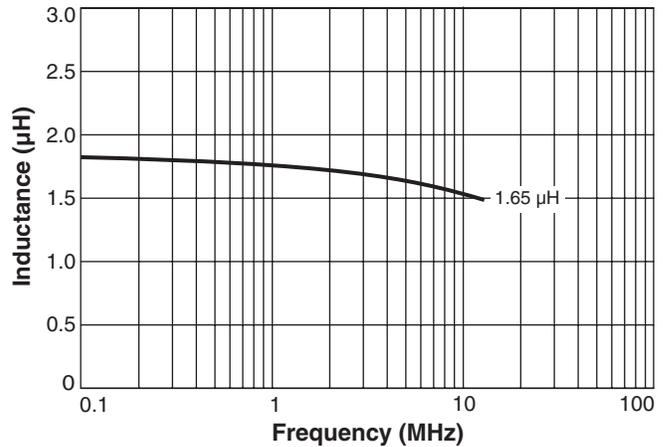

Temperature Rise vs Current

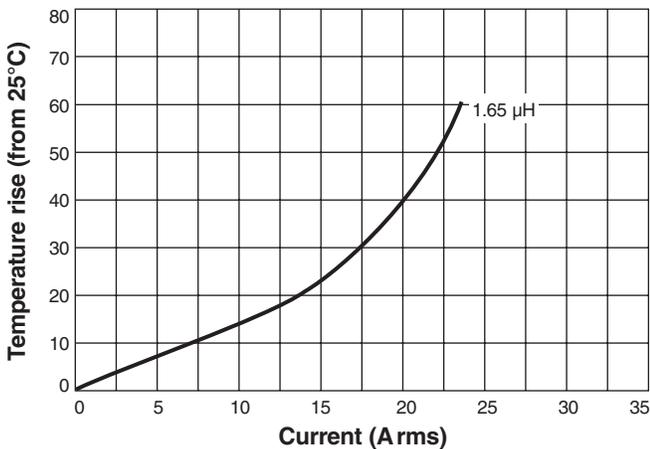

Current Derating

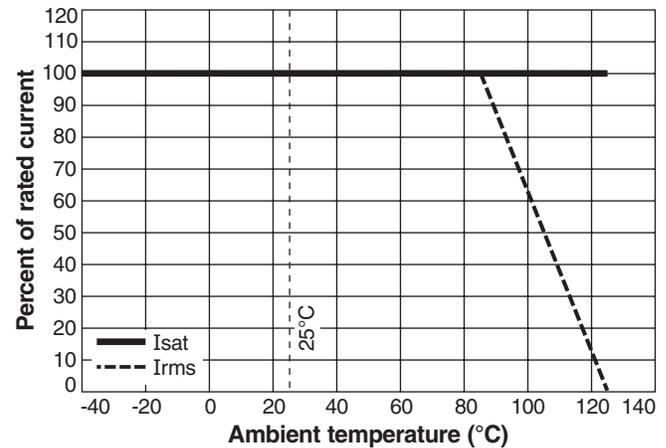

Specifications subject to change without notice.
Please check our website for latest information.

Document 684-2 Revised 10/16/08

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469

E-mail info@coilcraft.com Web <http://www.coilcraft.com>