



**Kaga Electronics(USA) Inc.**

## ADAPTER - 40W

*Green Mode*

Meet CEC Regulations & RoHS Compliance



### FEATURE

Desktop	IEC 320/C6,C8,C14
Input range	90-264V/47~63Hz
Output	9V~12V/4.0A~3.3A(40W max.)
Efficiency	83% typical
Protection	Short circuit protection/Over voltage protection
Load regulation	±5%
Leakage current	Less than 3.5mA(3Pins),0.25mA(2Pin)
M.T.B.F.	50,000 hours min. at 25°C, full load
Dimension	115X53X37

### APPLICATION

LCD Monitor, Notebook, Printer, Portable device

### SAFETY & EMI

Safety	UL/cUL/GS/CB/PSE/BSMI
EMI	CE Class B; Conduction & Radiation MEET


### ENVIRONMENTAL

Operating temperature	0 ~ +40°C
Storage Temperature	-20 ~ +60°C
Relative Humidity	(operating)20~80%RH (storage)10~90%RH


## MODEL

NO	MODEL NAME	Voltage(V)	Current(A)	Power(W)
1	STD-0904P	9	4	36
2	STD-1233P	12	3.3	40


## MECHANICAL DRAWING

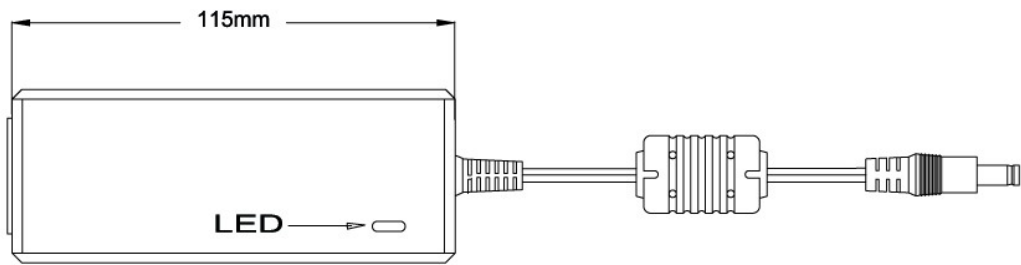

TOP-VIEW

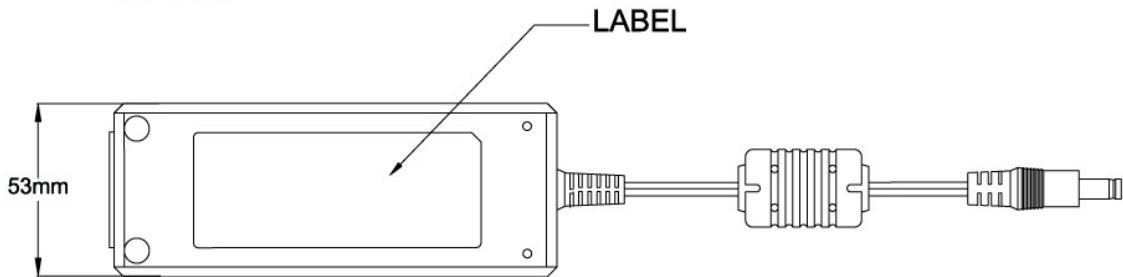

BOTTOM-VIEW



SIDE-VIEW