


Specifications


Parameter	Unit	Minimum	Typical	Maximum	
Center Frequency	MHz	69.9	70	70.1	
Insertion Loss	dB	-	23	27	
1 dB Bandwidth	MHz	-	4.78	-	
3 dB Bandwidth	MHz	4.9	4.98	-	
40 dB Bandwidth	MHz	-	5.73	-	
Passband Variation	dB	-	0.7	1	
Absolute Delay	usec	-	3.6	4	
Ultimate Rejection	$f_0 \pm 2.865\text{MHz}$	dB	35	40	-
	$f_0 \pm 3.065\text{MHz}$	dB	45	60	-
	$f_0 \pm 3.465\text{MHz}$	dB	50	68	-
	$f_0 \pm 7.465\text{MHz}$	dB	55	70	-
	$f_0 \pm 15\text{MHz}$	dB	55	66	-
Material Temperature coefficient	KHz/°C	-6.58			
Ambient Temperature	°C	25			
Package Size	DIP3512 (35.0x12.8x4.7mm3)				

Notes:


1. All specifications are based on the test circuit shown
2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
4. This is the optimum impedance in order to achieve the performance show

Matching Configuration

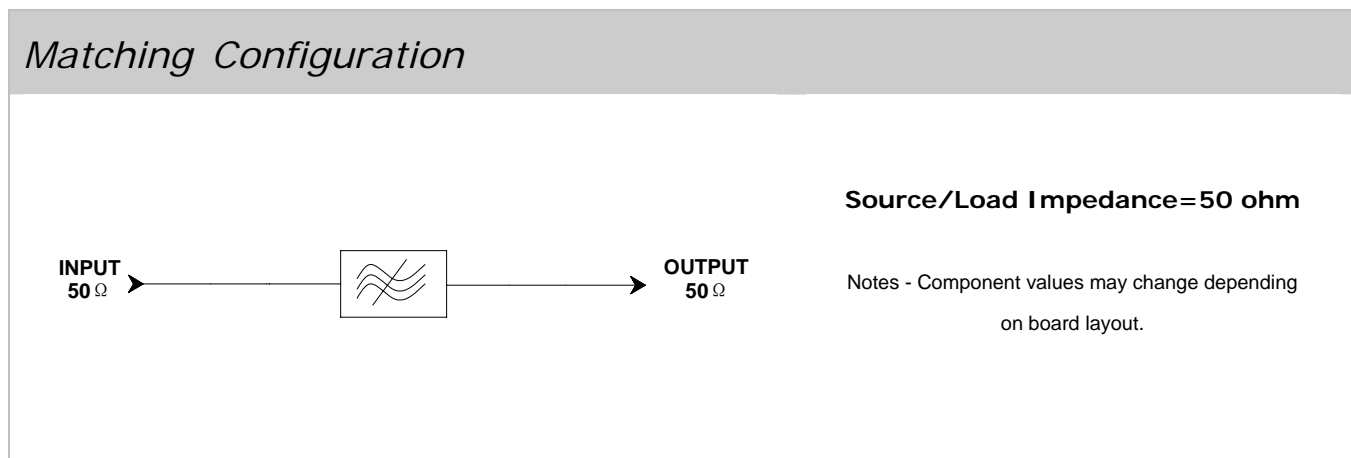

	SIPAT Co., Ltd. (CETC No. 26 Research Institute) Nanping Huayuan Road No. 14 Chongqing, China, 400060	Part Number	LBN70A38	
		Rev. Date	2007-3-27	
		Ver.	1.0	Page 1/4

Package Dimension

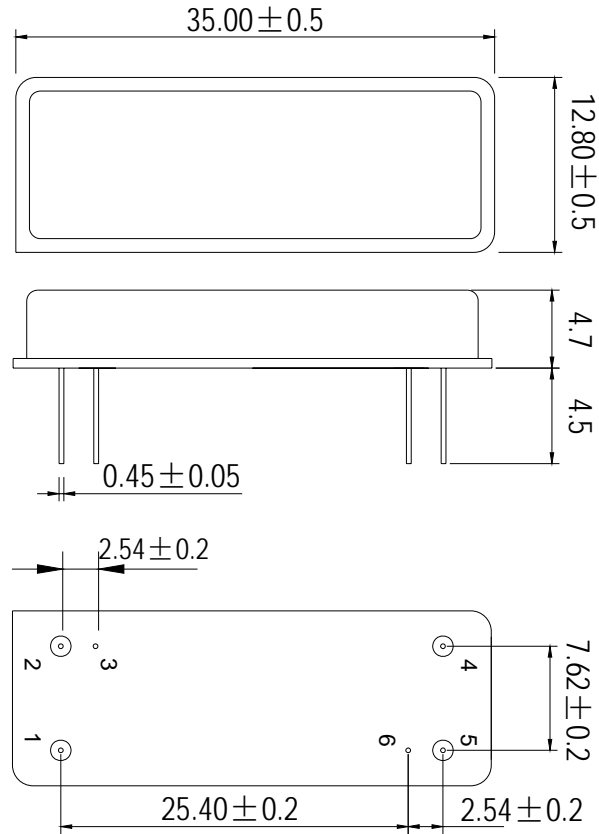

Input	1
Output	5
Ground	2,3,4,6

Package: DIP3512

Unit: mm




SIPAT Co., Ltd.
(CETC No. 26 Research Institute)
Nanping Huayuan Road No. 14
Chongqing, China, 400060

Part Number	LBN70A38	
Rev. Date	2007-3-27	
Ver.	1.0	Page 2/4


Typical Performance

Frequency Response

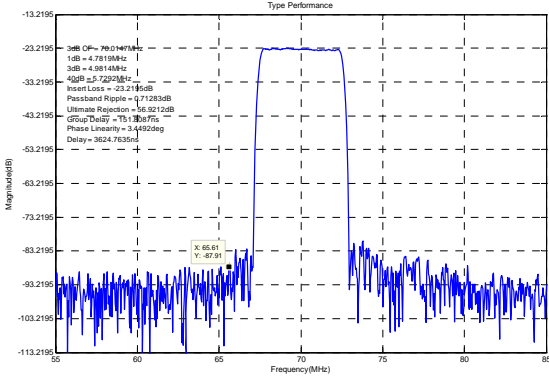


Horizontal: 5 MHz/Div Vertical: 10 dB/Div

Passband Response

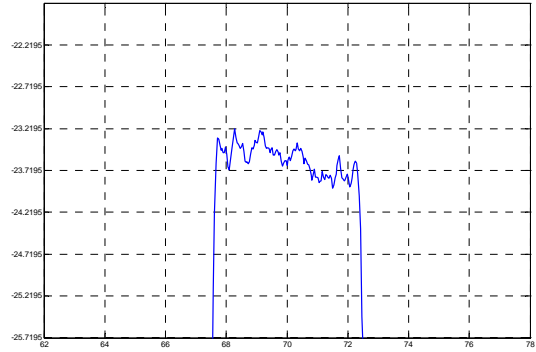


Horizontal: 2 MHz/Div Vertical: 0.5 dB/Div

Group Delay Variation (f0±2.4MHz)

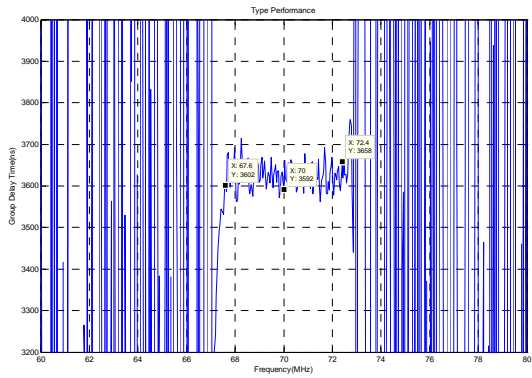


Horizontal: 2 MHz/Div Vertical: 100 ns/Div

Phase Linearity (f0±2.4MHz)

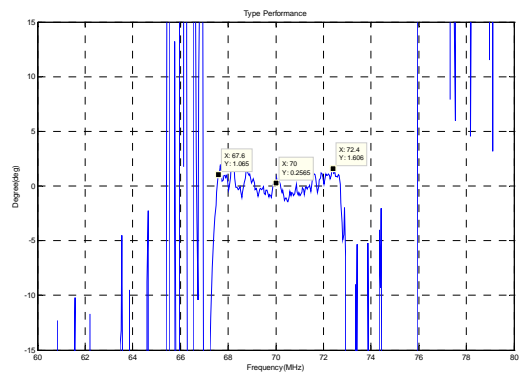


Horizontal: 2 MHz/Div Vertical: 5 deg/Div

Smith Chart S11

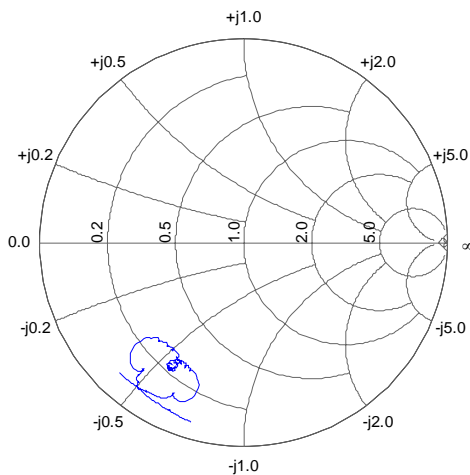

Smith Chart S22

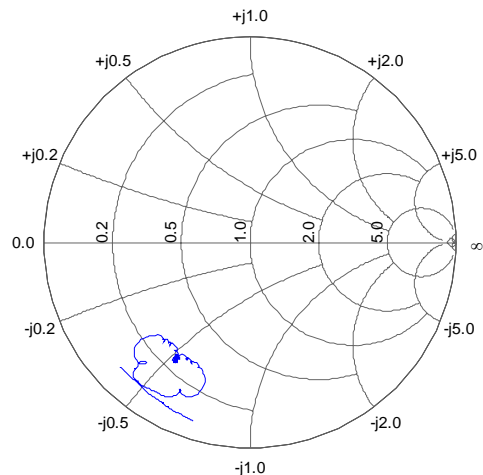

SIPAT Co., Ltd.
(CETC No. 26 Research Institute)
Nanping Huayuan Road No. 14
Chongqing, China, 400060

Part Number

LBN70A38

Rev. Date

2007-3-27

Ver.

1.0

Page 3/4

Maximum Ratings

Operating Temperature Range	°C	[-40°C;+85°C]
Storage Temperature Range	°C	[-40°C;+105°C]
DC Voltage	V	0
Input Power	dBm	10 max
ESD Class		1



SIPAT Co., Ltd.
(CETC No. 26 Research Institute)
Nanping Huayuan Road No. 14
Chongqing, China, 400060

Part Number LBN70A38

Rev. Date 2007-3-27

Ver. 1.0

Page 4/4