

SCHOTTKY BARRIER RECTIFIER

VOLTAGE 100 Volts CURRENT 8 Amperes

FEATURES

- * Low switching noise
- * Low forward voltage drop
- * Low thermal resistance
- * High current capability
- * High switching capability
- * High surge capability
- * High reliability

MECHANICAL DATA


- * Case: To-220 molded plastic
- * Epoxy: Device has UL flammability classification 94V-O
- * Lead: MIL-STD-202E method 208C guaranteed
- * Mounting position: Any
- * Weight: 2.24 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.



TO-220

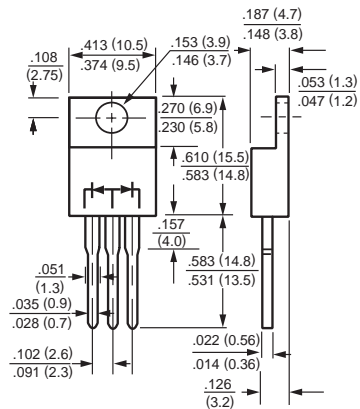

Dimensions in inches and (millimeters)

MAXIMUM RATINGS (At TA = 25°C unless otherwise noted)

RATINGS	SYMBOL	SR8100A	UNITS
Maximum Recurrent Peak Reverse Voltage	VRRM	100	Volts
Maximum RMS Voltage	VRMS	70	Volts
Maximum DC Blocking Voltage	VDC	100	Volts
Maximum Average Forward Rectified Current at Derating Case Temperature	IO	8	Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	IFSM	150	Amps
Typical Thermal Resistance (Note 1)	RθJC	2.5	°C/W
Typical Junction Capacitance (Note 3)	CJ	450	pF
Operating Temperature Range	TJ	-65 to + 150	°C
Storage Temperature Range	TSTG	-65 to + 150	°C

ELECTRICAL CHARACTERISTICS (At TA = 25°C unless otherwise noted)

CHARACTERISTICS	SYMBOL	SR8100A	UNITS
Maximum Instantaneous Forward Voltage at 4.0A DC	VF	.77	Volts
Maximum Average Reverse Current at Rated DC Blocking Voltage	@ Tc = 25°C	10	mAmps
	@ Tc = 100°C	100	mAmps

- NOTES : 1. Thermal Resistance Junction to Case.
 2. Suffix "A" = Common Anode.
 3. Measured at 1 MHz and applied reverse voltage of 4.0 volts.

RATING AND CHARACTERISTIC CURVES (SR8100A)




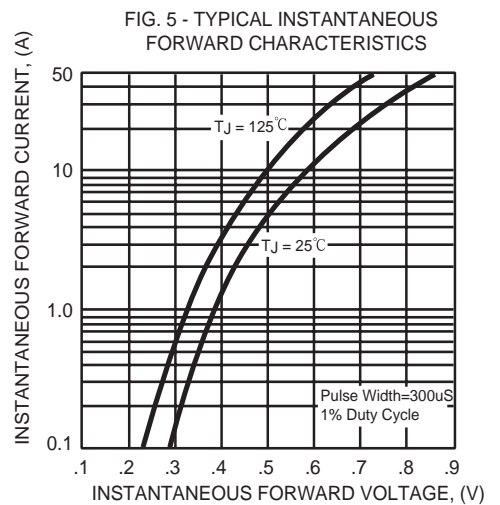


FIG. 4 - TYPICAL JUNCTION CAPACITANCE

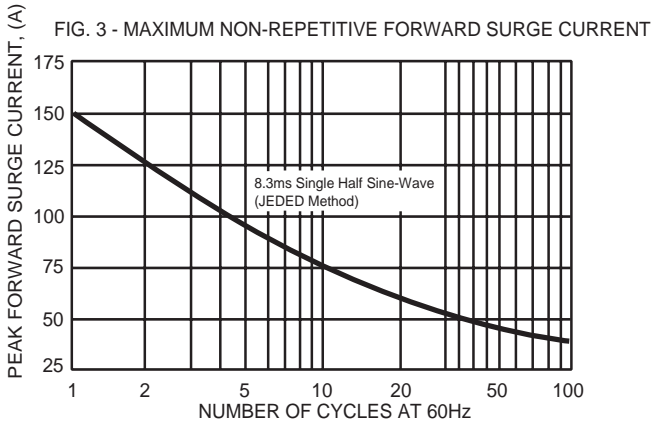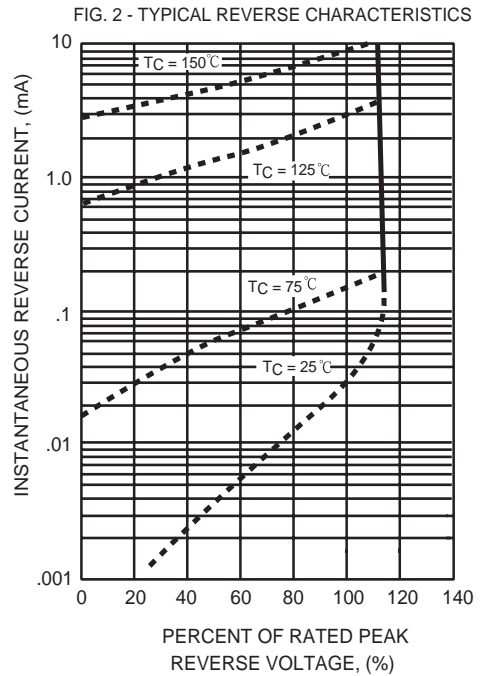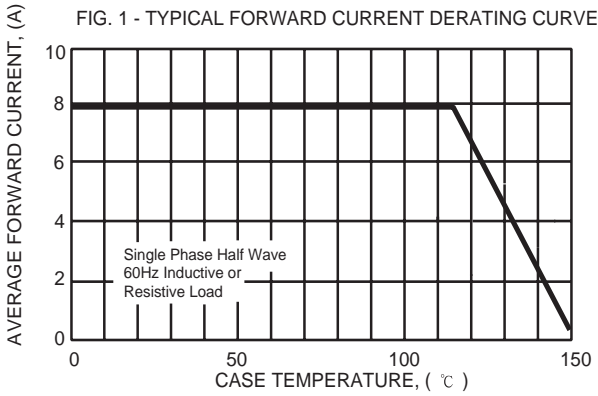