


24-Way Power Divider

P/N: JXWBGF-T-24-3600-5100

Frequency(MHz)	3700±1; 5100±1
Insertion Loss(dB)	2.5
Isolation between output ports(dB)	22
Input Power(W)	25
Phase Balance(°)	±5
Amplitude Balance(dB)	±0.3
VSWR	1.3
Impedance(Ohm)	50
Connector	N-Female
Operating Temperature(°C)	-55 ~ +85
Storage Temperature(°C)	-60 ~ +90
Size(mm)	557.5 x 130 x 55

Outline Drawing

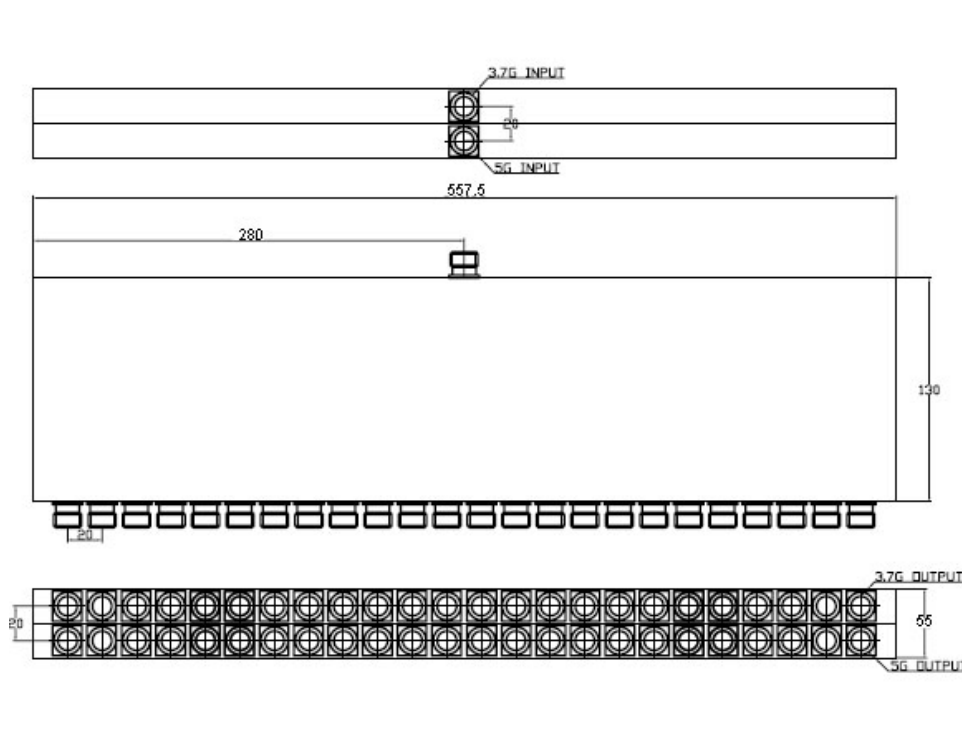

For current data sheets, please contact: sales@aacix.com