



Features

- ◇ For IF SAW filter
- ◇ High attenuation
- ◇ Single-ended operation
- ◇ Dual In-line Package
- ◇ RoHS compliant (2002/95/EC), Pb-free

Specifications


Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	139.85	140	140.15
Insertion Loss	dB	-	25.5	28
1.2 dB Bandwidth	MHz	11	11.11	-
3 dB Bandwidth	MHz	-	11.31	-
25 dB Bandwidth	MHz	-	11.98	12.1
35 dB Bandwidth	MHz	-	12.1	12.9
40 dB Bandwidth	MHz	-	12.14	-
50 dB Bandwidth	MHz	-	12.2	15
Passband Variation	dB	-	0.8	1.2
Absolute Delay	usec	-	3.77	3.83
Ultimate Rejection	dB	50	58	-
Material Temperature coefficient	KHz/°C	-2.52		
Substrate Material	-	112LT		
Ambient Temperature	°C	25		
Operating Temperature Range	°C	-40	-	+85
Storage Temperature Range	°C	-45	-	+105
DC Voltage	V	0		
Input Power	dBm	-	-	10
ESD Class	-	1A		
Package Size	DIP2712 (27.0x12.8x4.7mm3)			

Notes:

1. All specifications are based on the test circuit shown;
2. In production, all specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature;
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances;
4. This is the optimum impedance in order to achieve the performance show.

	SIPAT Co., Ltd. (CETC No.26 Research Institute) #14 Nanping Huayuan Road, Chongqing, China, 400060	Part Number	LBT140A16	
		Rev. Date	2008-07-11	
		Ver.	1.0	Page 1/3


Matching Configuration

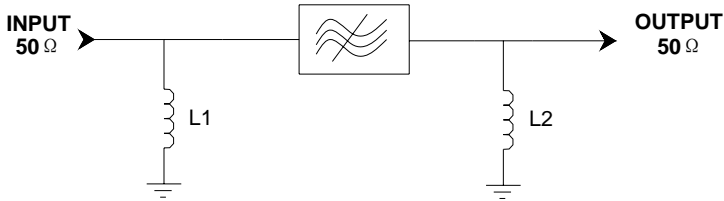

L1=22nH L2=33nH
Source/Load Impedance=50 ohm

Notes - Component values may change depending on board layout.

Package Dimension

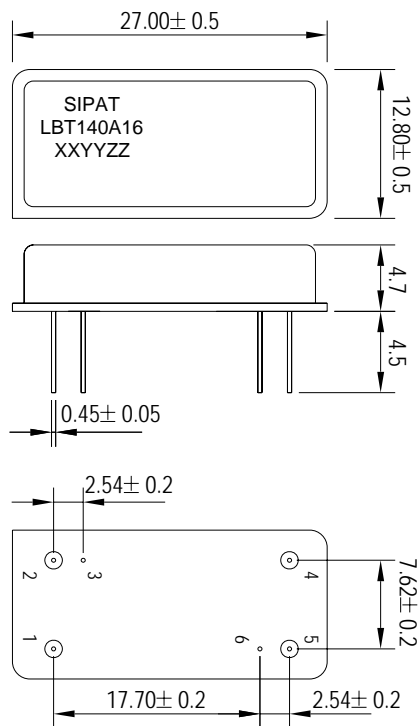

Pad Configuration:

Input 1
 Output 5
 Ground All Others

Marking Configuration:

- 1) SIPAT: Manufacturer Name
- 2) LBT140A16: Part Number
- 3) XXYY: Date(Year/month)
- 4) ZZ: Identified Code

Package: DIP2712

Unit: mm




SIPAT Co., Ltd.
(CETC No.26 Research Institute)
#14 Nanping Huayuan Road,
Chongqing, China, 400060

Part Number	LBT140A16	
Rev. Date	2008-07-11	
Ver.	1.0	Page 2/3




Typical Performance

Frequency Respond

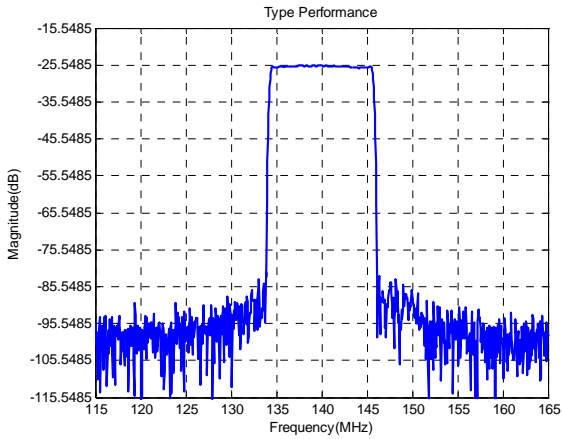


Horizontal: 5MHz/Div Vertical: 10dB/Div

Passband Respond

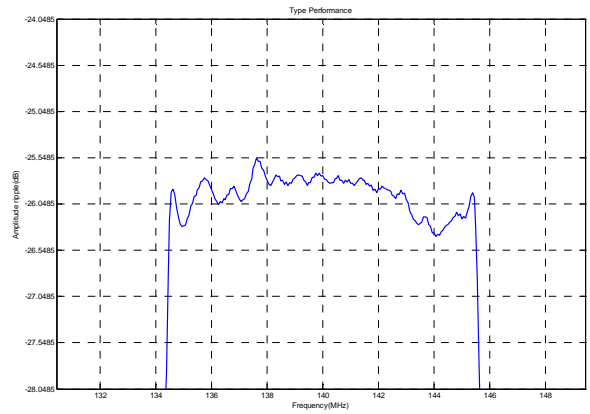


Horizontal: 2MHz/Div Vertical: 0.5dB/Div

Group Delay Variation($f_0 \pm 5\text{MHz}$)

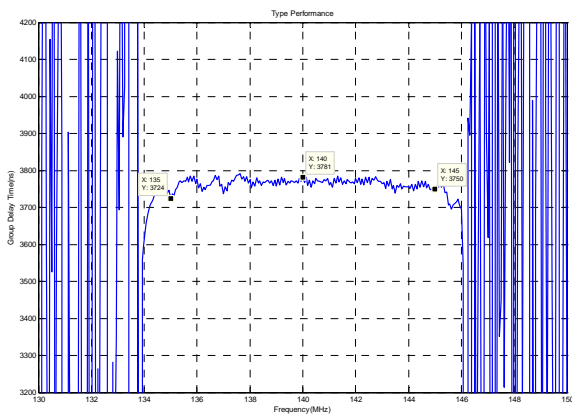


Horizontal: 2MHz/Div Vertical: 100ns/Div

Phase Linearity($f_0 \pm 5\text{MHz}$)

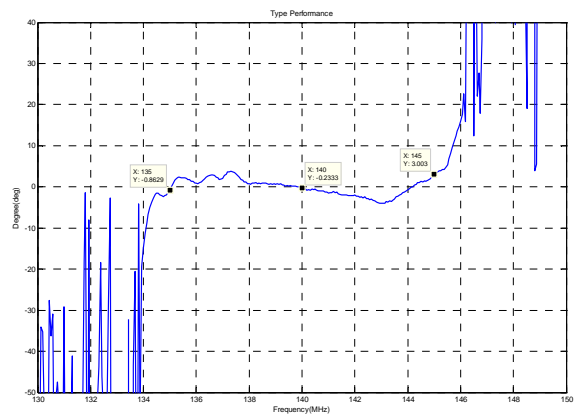


Horizontal: 2MHz/Div Vertical: 10deg/Div

Smith Chart S11

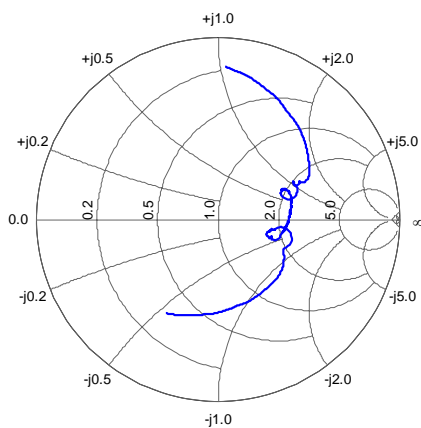

Smith Chart S22

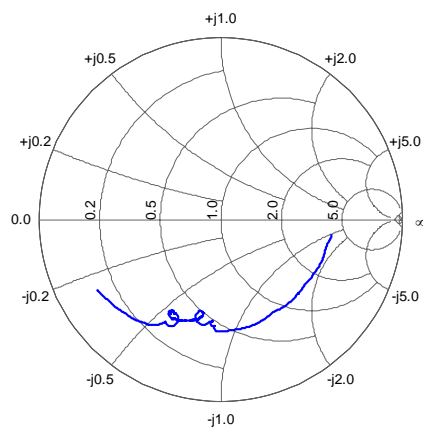

SIPAT Co., Ltd.
(CETC No.26 Research Institute)
#14 Nanping Huayuan Road,
Chongqing, China, 400060

Part Number

LBT140A16

Rev. Date

2008-07-11

Ver.

1.0

Page 3/3